

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[D15P33E4PA00LF](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

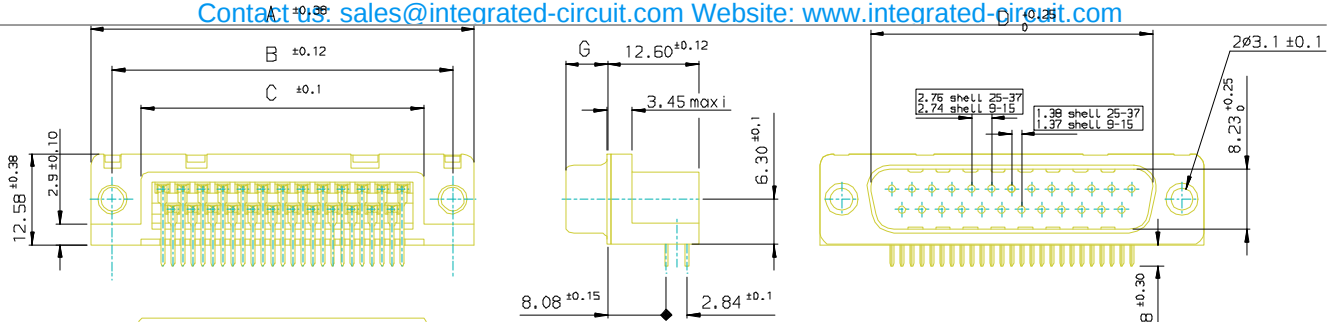

PC card drilling dimensions (after plating)
(thickness 1.60 ± 0.20 mm)

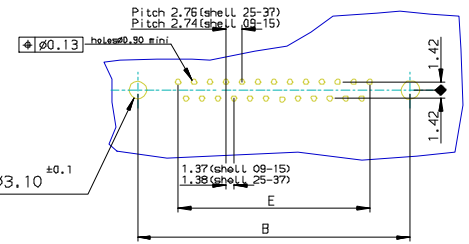

SHELL	A ± 0.38	B ± 0.12	C ± 0.10	D ± 0.25	E ± 0.07	G ± 0.25	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	5.90	D09P33E4PA00**	D09P33E6PA00**
15	39.14	33.32	25.18	25.12	19.18	5.90	D15P33E4PA00**	D15P33E6PA00**
25	53.03	47.04	39.12	38.84	33.12	5.70	D25P33E4PA00**	D25P33E6PA00**
37	69.32	63.50	55.68	55.30	49.68	5.70	D37P33E4PA00**	D37P33E6PA00**

Part Number & Date Code Printing

Gold flash	0.76 μ gold
------------	-----------------

LF FOR LEAD FREE

REQUIREMENTS

Technical characteristics:
Shell: steel tin/Zinc Cr3 plated
Housings: self-extinguishing thermoplastic, UL class 94V0
Contacts size 20: brass, gold on mating end, bright tin on termination end over nickel on entire contact
gauge retention Force: 0.20N min
Cycles: 500 for protection 6
200 for protection 4

Accessories:

Electrical characteristics:

max. current rating: 5A
Test voltage: 1000V
Rated voltage: 300V
Contact resistance: ≤ 25 m Ω
Shell resistance: ≤ 5 m Ω
Insulation resistance: ≥ 5000 M Ω

Climatic characteristics:

Operating temperature range: -55°C +125°C

Dimensions:

in accordance with MIL-C-24308C

FOR ROHS DETAILS REFER DWG. NO: C01-8646-0000

European Views

www.fciconnect.com			surface ISO 1302	tolerance std ISO 406 ISO 1101	projection 	mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	JOHN SLEEB	1996/10/17	ANGULAR	LINEAR	0.X ±0.1	size A3	
Eng	GEORGE VJ	1996/10/17			0.XX ±0.1		
Chr	GEORGE VJ	2005/07/27	MM ±1		0.XXX ±0.1		
Appr	KVSD	2005/07/27	Product family		D-SUB		
					ECN	Scale	
					-	-	
					Spec ref	-	
					-	-	
			title MALE CONNECTOR DELTA D right angle			ding no C01-8646-0511	Rev. E
			without accessories				
catalog no			DELTA-D			CUSTOMER	sheet 1 of 1

REV F - 2006-04-17