

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1513198](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog


SACC-M12FS-4SC M

Order No.: 1513198



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1513198>

Sensor/actuator connector, female, straight, 4-pos., M12, A-coded, spring-cage connection, metal knurl, cable cross section max. 8 mm

Commercial data	
GTIN (EAN)	 4 017918 946562
sales group	D120
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 33 (PC-2007)

Product notes

WEEE/RoHS-compliant since:
12/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Volume resistance	≤ 8 mΩ
Insulation resistance	≥ 100 MΩ

SACC-M12FS-4SC M Order No.: 1513198

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1513198>

Ambient temperature (operation)	-40 °C ... 85 °C (Male connector / female connector)
General characteristics	
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	PA 66
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	Neoprene
Type of connection	Spring-cage conn.
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	0.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	20
External cable diameter	4 mm ... 8 mm
Status display	No

Certificates / Approvals




Certification

CUL, UL

Diagrams/Drawings


Functional drawing

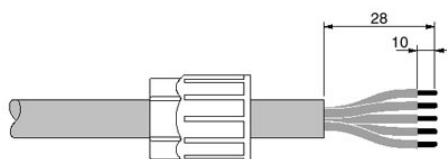

SACC-M12FS-4SC M Order No.: 1513198


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1513198>

Dimensioned drawing

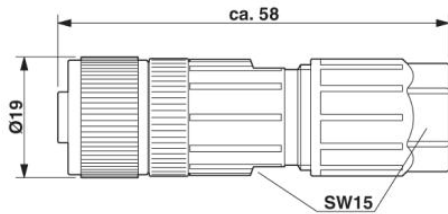

M12 x 1 female connector, straight

Schematic diagram

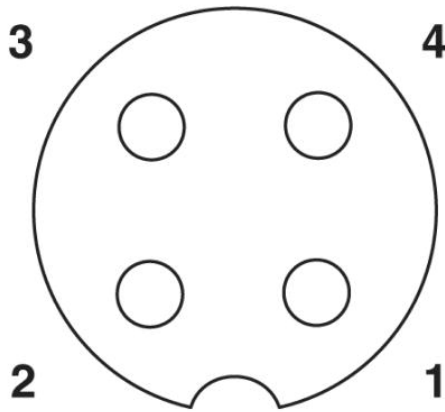

Pin assignment M12 socket, 4-pos., A-coded, view female side

SACC-M12FS-4SC M Order No.: 1513198

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1513198>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;