

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1774092](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## HC-HV 10/16-SMLD-67/M2PG21

Order No.: 1774092


The illustration shows box mounting bases in the versions with double locking latch and single locking latch, for double locking latch with protective cover



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1774092>

Box mounting base, with single locking latch, height 67 mm, with screw connection, 2x Pg21, with protective covers

Commercial data	
GTIN (EAN)	 4 017918 115418
sales group	D003
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 249 (PC-2005)

Product notes
WEEE/RoHS-compliant since: 06/28/2006 

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General data</b>	
Note	For contact inserts HC-HV10/16
Design	HV10/16
Height	67 mm

HC-HV 10/16-SMLD-67/M2PG21 Order No.: 1774092  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1774092>

Width	57 mm
Length	144 mm
Housing type	Box mounting base with cover
Locking type	With single locking latch
Type of the screw connection	2x Pg21
Pg screw connection	With
Wrench size, union nut	28 mm
External cable diameter	10 mm ... 19 mm
Protective cover	Yes
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	High-grade steel
Material grip body interlock	PA-GF
Material, protective cover	PA

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Dimensioned drawing

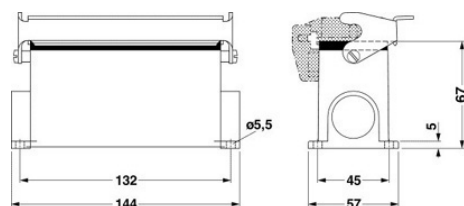

HC-HV 10/16-SMLD-67/M2PG21 Order No.: 1774092

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1774092>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;