

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0002096102](#)


For any questions, you can email us directly:

sales@integrated-circuit.com



PART NO.	ENG. NO.	INTERLEAF PAPER OPTION
02-09-1104	1189-A(P901IL)	
02-09-1102	1189-A(P901)	
02-09-5111	1189-A(P591IL)	
02-09-5102	1189-A(P591)	
02-09-5106	1189-A(P550IL)	
02-09-5100	1189-A(P550)	
02-09-6102	1189-A(P901-I)	YES



SECT. "A-A"



SECT. "B-B"

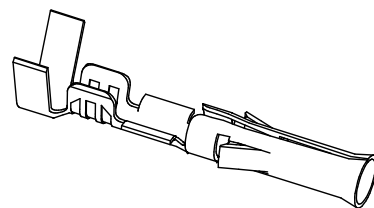

LEGEND

1189-A(****)*-*

INTERLEAF PAPER OPTION

P=PREPLATE
BLANK=POSTPLATE



FORM
BLANK=CHAIN
L=LOOSE
FINISH CODE

BLANK: INTERLEAF PAPER ON FIRST
FEW WRAPS ONLY.

I: INTERLEAF PAPER THROUGH
OUT REEL.

NOTES:

1. MATERIAL: CARTRIDGE BRASS, ALLOY #C26000, .010/(0.25) THICK
2. FINISH CODES:
901 HOT TIN DIP .000020/(0.00051) MIN.
591 SELECT GOLD PLATE .000050/(0.00127) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
550 SELECT GOLD PLATE .000015/(0.00038) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
*THE PRIMARY SHIPPING CARTON WILL BE LABELED, "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX OF DIRECTIVE 2000/53/EC", AND CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD.
3. THIS PART CONFORMS TO PROD. SPEC. 02-09.
4. PACKAGING INFORMATION: NOT AVAILABLE
5. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 14 THRU 20 AWG WIRE.
6. INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
7. RETENTION: 20 LBS. MIN. FROM HOUSING.

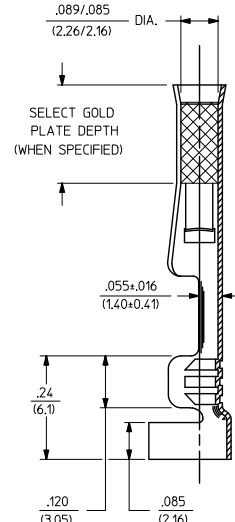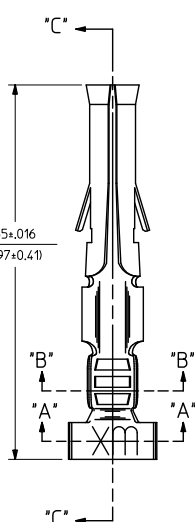

SECT. "C-C"

CHAIN FORM
FULL SCALE



ADD P/N 02-09-6102 EC NO: UCP2012-2714 DRAWN: HAH CHKD: JELL APPR: SMTH C2	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 6:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE CRIMP TERMINAL, FEMALE, .093/(2.36) DIA. 14-20 AWG MOLEX INCORPORATED
			mm	INCH	DRAWN BY GEP	DATE 1987/10/26	TITLE			
			4 PLACES ± .010	3 PLACES ± .010	CHECKED BY RW	DATE 1987/10/26				
			2 PLACES ± .014	1 PLACE ± .035	APPROVED BY RAS	DATE 1987/10/26				
			ANGULAR ± 1/2°							
REV			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MATERIAL NO. SEE CHART		DOCUMENT NO. SD-1189-*	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										