

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0397070011](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

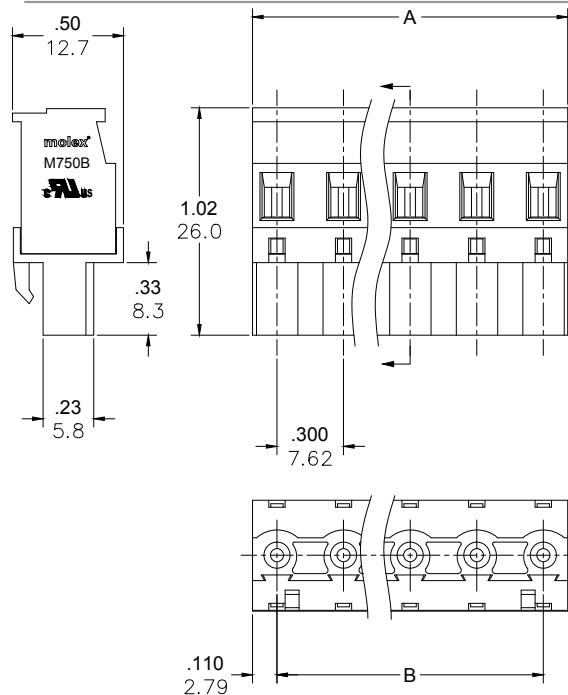

PART NUMBER DATA					
CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN mm	B IN mm
2	397070002	M750B-06-5-02-3	GREEN	.52	13.2
3	397070003	M750B-06-5-03-3	GREEN	.82	20.8
4	397070004	M750B-06-5-04-3	GREEN	1.12	28.4
5	397070005	M750B-06-5-05-3	GREEN	1.42	36.1
6	397070006	M750B-06-5-06-3	GREEN	1.72	43.7
7	397070007	M750B-06-5-07-3	GREEN	2.02	51.3
8	397070008	M750B-06-5-08-3	GREEN	2.32	58.9
9	397070009	M750B-06-5-09-3	GREEN	2.62	66.5
10	397070010	M750B-06-5-10-3	GREEN	2.92	74.2
11	397070011	M750B-06-5-11-3	GREEN	3.22	81.8
12	397070012	M750B-06-5-12-3	GREEN	3.52	89.4

REF. LAST 2 DIGITS OF PART NUMBER EQUALS CIRCUIT COUNT

CONTACT FACTORY FOR OPTIONAL COLORS

M750B-06-5-XX-3
 COLOR
 POLES
 PITCH
 STYLE
 SERIES

SPECIFICATIONS

1. MATERIAL:

- SCREW: STEEL, M3, ZINC PLATED
- CONTACT : BRONZE, TIN PLATED
- CAGE: BRASS, NICKEL PLATED
- BODY : PA66, UL94 V-0
- COVER: PA66, UL94 V-0

2. WIRE SIZE: 30-12AWG

3. RATING: 15A AT 51-150V, 15A AT 151-300V

4. POWER-FREQUENCY WITHSTAND: AC 2500V/1MIN.

5. INSULATION RESISTANCE: DC500V 500MΩ OR ABOVE

6. RATED IMPULSE VOLTAGE: 4000V/MINUS AND PLUS 5 TIMES EACH

7. WIRE STRIP LENGTH: .28 IN. (7.0mm)

8. SCREW TORQUE: 5.0 IN LBS. (0.56 N.M)

9. OPERATING TEMPERATURE: -40°C TO +105°C

10. DIMS SHOWN ARE FOR REFERENCE ONLY

RELEASED EC NO: JPC2014-1533 DRWN: RSTONE 2014/02/27 CHKD: G. FARNS APPR: JFMURPHY 2014/10/16 A	DESCRIPTION	QUALITY SYMBOL ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
			mm		INCH		IN/MM		---	METRIC	
			4 PLACES	±---	±---	RSTONE	2014/02/27	TITLE	PLUGGABLE TERMINAL BLOCK		
			3 PLACES	±---	±.005	CHECKED BY	DATE		7.62MM (.300) PITCH		
			2 PLACES	±0.13	±.01	G. FARNS	---		VERTICAL, REAR FACING		
			1 PLACE	±0.3	±---	APPROVED BY	DATE				
			ANGULAR ±---		JFMURPHY	2014/10/16	molex	MOLEX INCORPORATED			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SD-39707-001		SHEET NO.
					SEE CHART						1 OF 1
					SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				