Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

NorComp
26633601RP2

For any questions, you can email us directly:
sales@integrated-circuit.com

Distributor of NorComp : Excellent Integrated System Limited
Datasheet of 26633601RP2 - CONN HDR 2MM MALE 1ROW STR 36POS
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

DESCRIPTION: 2mm HEADER STRIP STRAIGHT

"L" = NO. OF PINS/ROW X .079 - .079

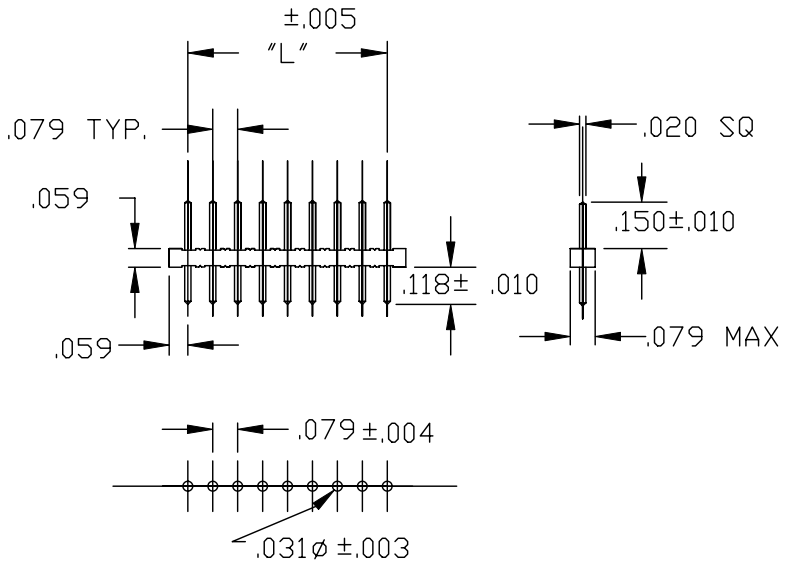

2663 YY 01RP2

SERIES
2663 = SINGLE ROW

POSITIONS
SINGLE- INCRMENTS OF 1
(01-36)

TYPE
01 = STRAIGHT

PLATING
P2 = GOLD FLASH ENTIRE CONTACT

MATERIALS:
HOUSING: NYLON 6T - UL 94V-0
COLOR: BLACK
CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH ENTIRE CONTACT
RoHS COMPLIANT

CURRENT RATING: 1 AMP
INSUALTOR RESISTANCE: 5000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING: 500V AC
OPERATING TEMP: -40°C TO +105°C
MAX PROCESSING TEMP: 260°C FOR
10 SECONDS

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN: PAM JENKINS	DATE: 1-27-06	
CHECKED:	DATE:	
SCALE:	SHEET 1 OF 1	REV 2
DWG NO. 2663YY01RP2		