

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)



[61428-001LF](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

PRODUCT NUMBER
61428-001
61428-001LF

No.	DESCRIPTION	MATERIAL	FINISH	
			61428-001	61428-001LF
1	SHELL	BRASS	Au 0.05um MIN.	Au 0.05um MIN.
2	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN.	Au 1.27um MIN.
3	OUTER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN.	Au 1.27um MIN.
4	INSULATOR	PTFE		
5	P.F. MALE PIN	PHOSPHER BRONZE	SnPb 0.50-1.5um	Sn 0.50-1.5um

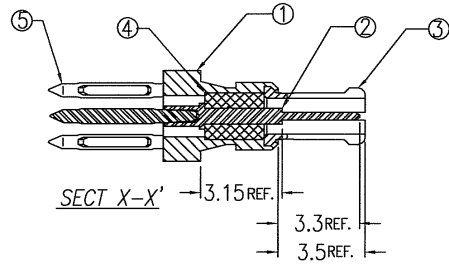

RECOMMENDED PCB LAYOUT
 (TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1)

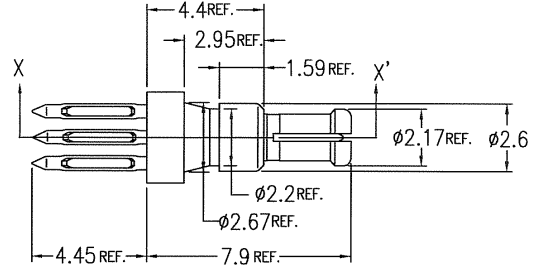

- NOTE
- FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN

mat'l. code				surface	tolerance	projection	product family	CODE
---				ISO 1302	ISO 406	ISO 1101	METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified	angles	linear	scale
A	RELEASED	J80432	YK	10/26/98	0.X	±0.2	MM	
B	REVISED	J10260	YK	3/30/01	0.XX	±0.2		
C	REVISED	J05-0664	TS	10/21/05	0.XXX	±0.2	scale 5:1	
D	REVISED	J07-0030	SJ	1/18/07	dr	T.SUKEKAWA	10/21/05	
					enrg	S.OKUDAIRA	1/18/07	
					chr	R. KAWAY	1/18/07	
					appd	P. O. ...	1/18/07	
sheet	revision	D						
index	sheet	1						

title	METRAL MINI COAX
title	MALE PRESS-FIT TO B.P.
dwg no	61428
type	Customer Drawing
sheet 1 of 1	size A4