

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)

[IXKP24N60C5M](#)


For any questions, you can email us directly:

sales@integrated-circuit.com


CoolMOS™ 1) Power MOSFET

Fully isolated package
 N-Channel Enhancement Mode
 Low $R_{DS(on)}$, High V_{DSS} MOSFET
 Ultra low gate charge

I_{D25} = 8.5A
 V_{DSS} = 600V
 $R_{DS(on) \max}$ = 0.165Ω



TO-220 FP



Preliminary data

MOSFET			
Symbol	Conditions	Maximum Ratings	
V_{DSS}	$T_{VJ} = 25^{\circ}\text{C}$	600	V
V_{GS}		± 20	V
I_{D25}	$T_C = 25^{\circ}\text{C}$	8.5	A
I_{D90}	$T_C = 90^{\circ}\text{C}$	6.0	A
E_{AS}	single pulse	522	mJ
E_{AR}	repetitive		
		$I_D = 7.9 \text{ A}; T_C = 25^{\circ}\text{C}$	
dV/dt	MOSFET dV/dt ruggedness $V_{DS} = 0 \dots 480 \text{ V}$	50	V/ns

Features

- fast CoolMOS™ 1) power MOSFET 4th generation
- High blocking capability
- Lowest resistance
- Avalanche rated for unclamped inductive switching (UIS)
- Low thermal resistance due to reduced chip thickness
- Enhanced total power density

Applications

- Switched mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Power factor correction (PFC)
- Welding
- Inductive heating
- PDP and LCD adapter

1) CoolMOS™ is a trademark of Infineon Technologies AG.

Symbol	Conditions	Characteristic Values			
		min.	typ.	max.	
$(T_{VJ} = 25^{\circ}\text{C}, \text{ unless otherwise specified})$					
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}; I_D = 10 \text{ A}$		150	165	mΩ
$V_{GS(th)}$	$V_{DS} = V_{GS}; I_D = 0.79 \text{ mA}$	2.5	3	3.5	V
I_{DSS}	$V_{DS} = 600 \text{ V}; V_{GS} = 0 \text{ V}$			1	μA
				10	μA
				100	nA
I_{GSS}	$V_{GS} = \pm 20 \text{ V}; V_{DS} = 0 \text{ V}$			100	nA
C_{iss}	$V_{GS} = 0 \text{ V}; V_{DS} = 100 \text{ V}$ $f = 1 \text{ MHz}$		2000		pF
C_{oss}			100		pF
Q_g	$V_{GS} = 0 \text{ to } 10 \text{ V}; V_{DS} = 400 \text{ V}; I_D = 12 \text{ A}$		40	52	nC
Q_{gs}			9		nC
Q_{gd}			13		nC
$t_{d(on)}$	$V_{GS} = 10 \text{ V}; V_{DS} = 400 \text{ V}$ $I_D = 12 \text{ A}; R_G = 3.3 \Omega$		12		ns
t_r			5		ns
$t_{d(off)}$			50		ns
t_f			5		ns
R_{thJC}				3.65	K/W

Source-Drain Diode

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
(T _{VJ} = 25°C, unless otherwise specified)				
I _S	V _{GS} = 0 V		12	A
V _{SD}	I _F = 12 A; V _{GS} = 0 V	0.9	1.2	V
t _{rr}	I _F = 12 A; -di _F /dt = 100 A/μs; V _R = 400 V		390	ns
Q _{RM}			7.5	μC
I _{RM}			38	A


Component

Symbol	Conditions	Maximum Ratings	
T _{VJ}	operating	-55...+150	°C
T _{stg}		-55...+150	°C
M _d	mounting torque	0.4 ... 0.6	Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R _{thCH}	with heatsink compound		0.50	K/W
R _{thJA}	thermal resistance junction - ambient		80	K/W
Weight			2	g

IXYS **IXKP 24N60C5M**

TO-220 ABFP Outline

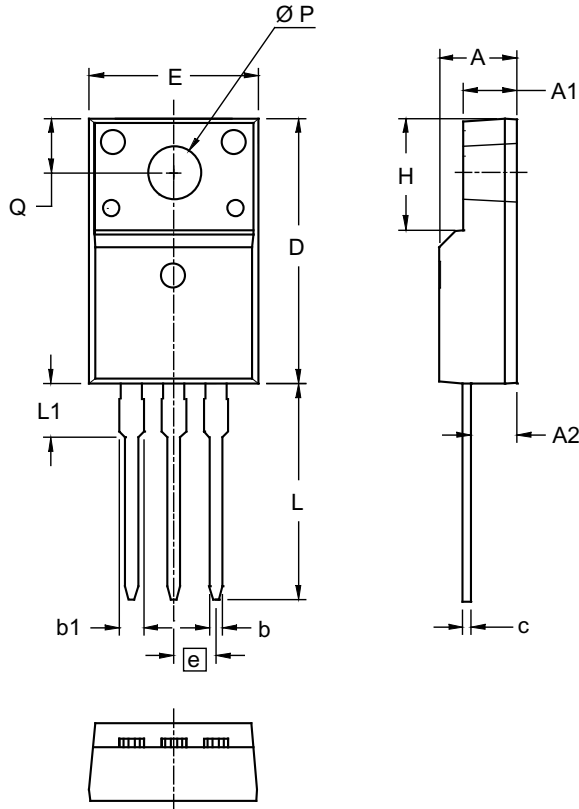

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.177	.193	4.50	4.90
A1	.092	.108	2.34	2.74
A2	.101	.117	2.56	2.96
b	.028	.035	0.70	0.90
b1	.050	.058	1.27	1.47
c	.018	.024	0.45	0.60
D	.617	.633	15.67	16.07
E	.392	.408	9.96	10.36
e	.100 BSC		2.54 BSC	
H	.255	.271	6.48	6.88
L	.499	.523	12.68	13.28
L1	.119	.135	3.03	3.43
ØP	.121	.129	3.08	3.28
Q	.126	.134	3.20	3.40

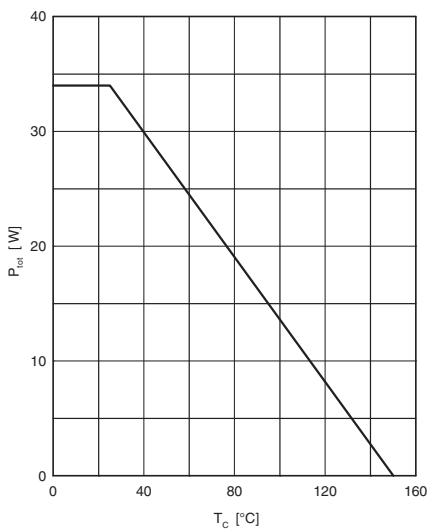


Fig. 1 Power dissipation

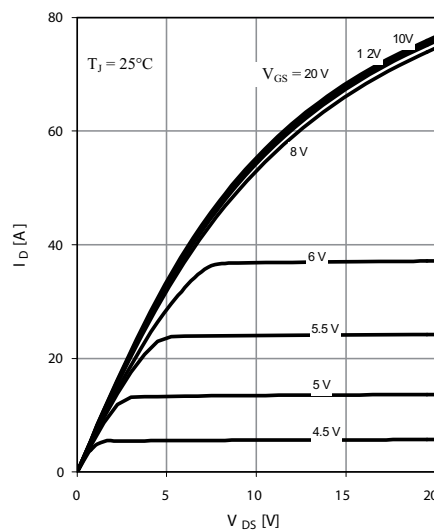


Fig. 2 Typ. output characteristics

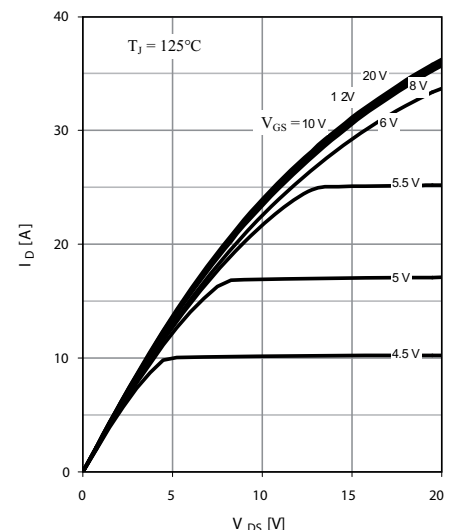


Fig. 3 Typ. output characteristics

IXYS **IXKP 24N60C5M**

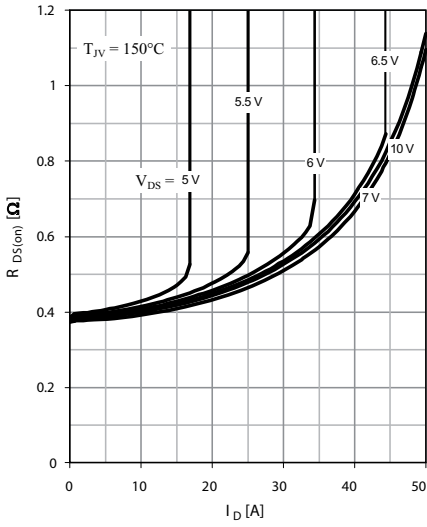


Fig. 4 Typ. drain-source on-state resistance characteristics of IGBT

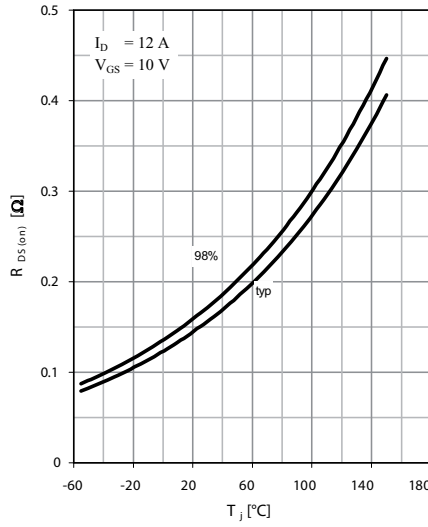


Fig. 5 Drain-source on-state resistance

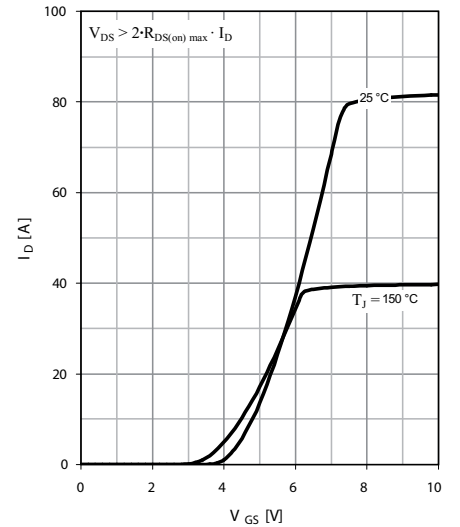


Fig. 6 Typ. transfer characteristics

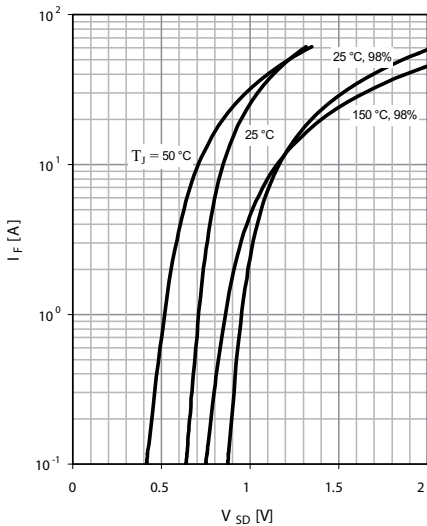


Fig. 7 Forward characteristic of reverse diode

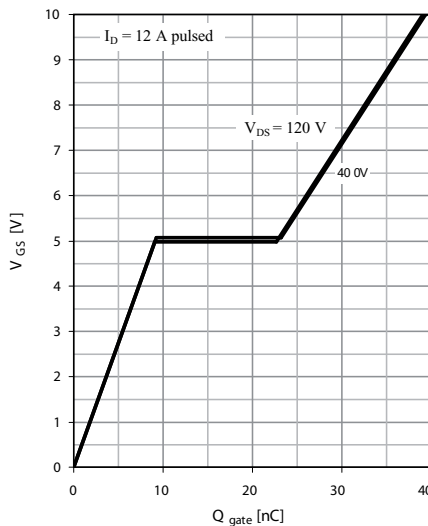


Fig. 8 Typ. gate charge

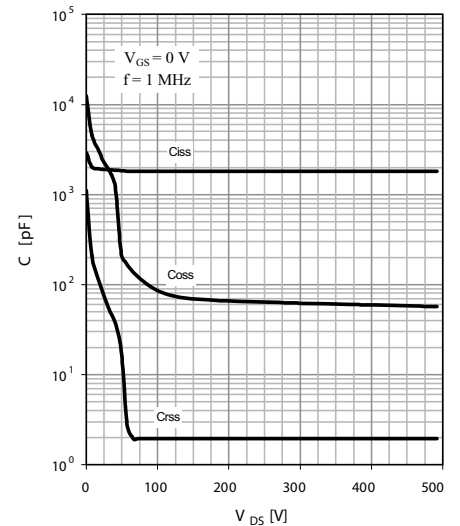


Fig. 9 Typ. capacitances

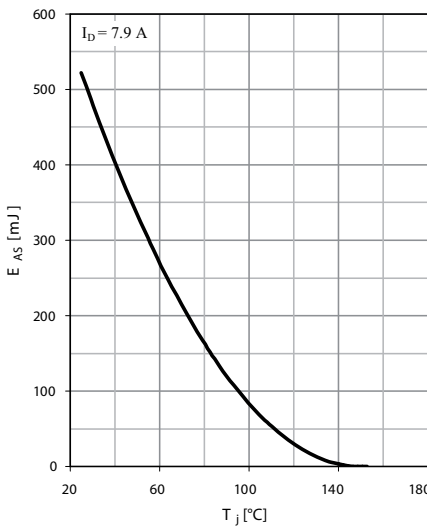


Fig. 10 Avalanche energy

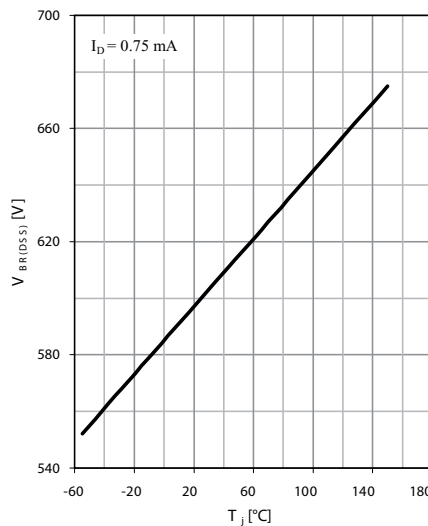


Fig. 11 Drain-source breakdown voltage

IXYS reserves the right to change limits, test conditions and dimensions.