

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[TE Connectivity AMP Connectors](#)
[558065-1](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

THIS DRAWING IS UNCLASSIFIED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	DATE	BY	APP'D
AA	22				
C		REVISED; EC 001C-0037-99	24AUG99	DL	CHB

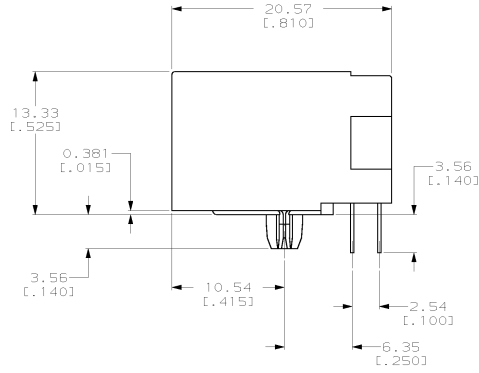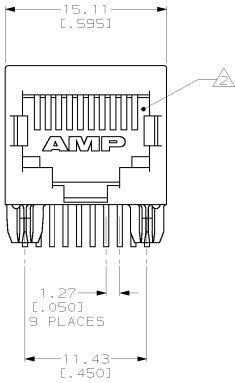

- △ MATERIAL: HOUSING - HTN NYLON, BLACK, IR REFLOW COMPATIBLE, UL 94V-0. TERMINALS - 0.33[0.13] THICK PHOS BRONZE PLATED WITH 1.27µm[0.00050] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81µm [0.00150] MINIMUM THICK TIN-LEAD IN SOLDER AREA OVER 1.27µm[0.00050] MINIMUM THICK NICKEL UNDERPLATE.
- △ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- 3. DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.

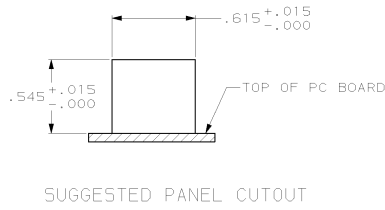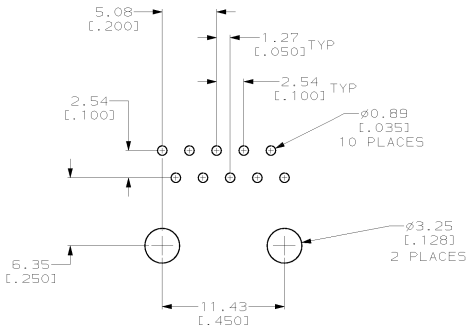

SUGGESTED PC BOARD LAYOUT
 VIEW SHOWN IS TOP OF PC BOARD
 (COMPONENT SIDE)

558065-1
 PART NUMBER

<small>THIS DRAWING IS UNCLASSIFIED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED.</small>		DWG: S. MAYBERRY 20 JUL 93 DES: B. FOX 03 AUG 93 RFD: L. DEED 03 AUG 93	AMP AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 F.LC ±. 1 F.LC ±. 5 F.LC ±0.13[0.005] 5 F.LC ANGLES ±.	PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: -	NAME: MODULAR JACK ASSEMBLY, 10 POSITION, SIDE ENTRY, LOW PROFILE SIZE: A2 CASE CODE: 00779 DRAWING NO: C-558065 SCALE: 4:1 SHEET 1 OF 1 REV C
MATERIAL: △	FINISH: △	CUSTOMER DRAWING	