

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Würth Electronics Midcom](#)
[750340505](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

Order from your stock



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.98 ohms max.
D.C. RESISTANCE	4-5 @20°C	1.20 ohms max.
D.C. RESISTANCE	6-9 @20°C	0.24 ohms max.
INDUCTANCE	1-2 10kHz, 200mVAC, Ls	1.08mH ±10%
INDUCTANCE	1-2 10kHz, 200mVAC, 1.6ADC, Ls	800uH min.
DIELECTRIC	1-9 tie(3+4),4000VAC, 1 second	-
DIELECTRIC	1-5 1800VAC, 1 second	-
URNS RATIO	(1-2):(4-5)	2.023:1, ±2%
URNS RATIO	(1-2):(6-9)	4.047:1, ±2%

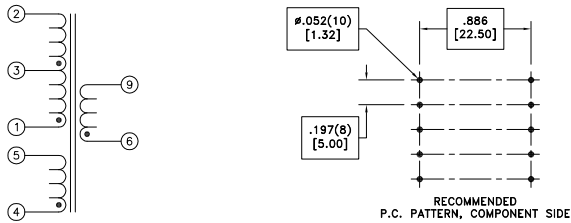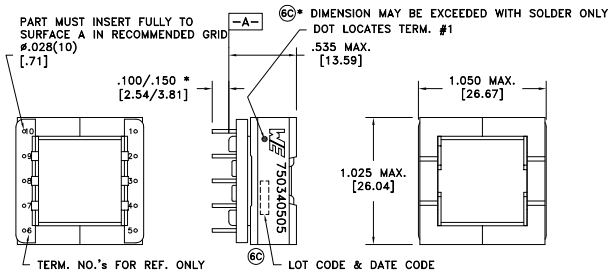

Ⓢ Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	<p>CONVENTION PLACEMENT</p>	<p>Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]</p>	<p>DRAWING TITLE TRANSFORMER</p>	<p>PART NO. 750340505</p>
6C	11/15	Method: Tray PKG-0029				
6B	7/11	www.we-online.com/midcom				
6A	8/09	SEE REVISION SHEET FOR REVISION LEVEL				

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

eiSos p/n: 750340505



SPECIFICATION SHEET 1 OF 1