

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)


[AK67401-0.5](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

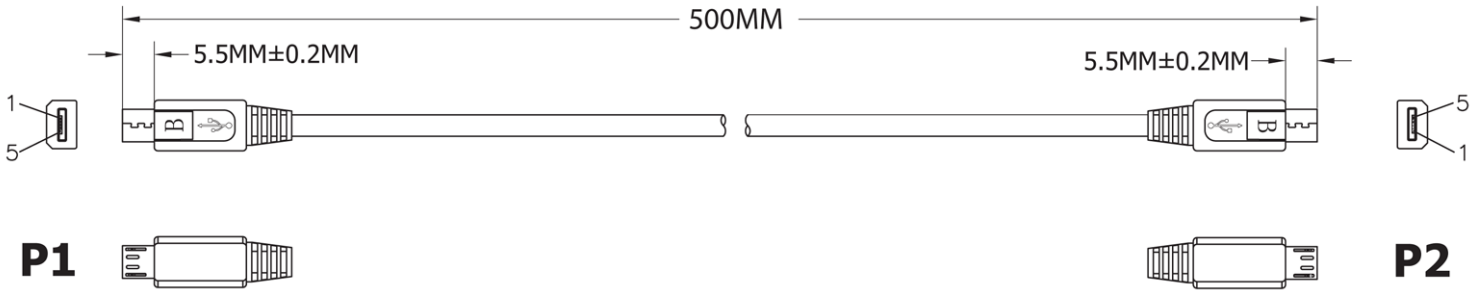

PIN ASSIGNMENT		
P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
5	BLACK	5
SHELL	DRAIN + BRAID	SHELL

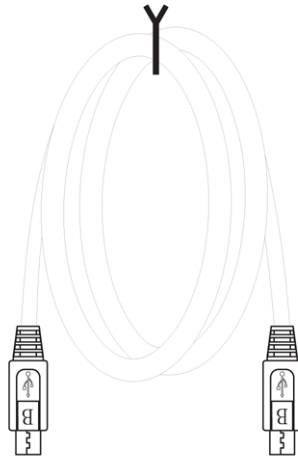

**Material:**

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL)\*1P+28AWG(7/0.12TC)\*2C]+AEB(48B TC)
  - Jacket: Black
  - OD: 3.5MM
- Connectors: Micro USB 5P B/M Solder Type
  - Shell: Nickel
  - Pin: G/F
  - Insulator Color: Black
- Outer Jacket: Black PVC-50P

**Electrical:**

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC

⊕ = Assmann logo



ITEM NO.	<b>AK67401-0.5</b>
TITLE	USB2.0 Micro Connection Cable, 0.5 Meter USB B Micro Male <=> USB B Micro Male

**ASSMANN**  
 Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 • eMail: info@assmann.us

THIS DRAWING IS UNPUBLISHED  
 ©Copyright 2009 by Assmann Electronic Components  
 All International Rights Reserved