

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CEL \(California Eastern Laboratories\)](#)
[PS7141-1C](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NEC

8 PIN DIP 400 V BREAKDOWN VOLTAGE TRANSFER TYPE 2-CH OPTICAL COUPLED MOSFET

**PS7141-1C
PS7141L-1C**

FEATURES

- **2 CHANNEL TYPE:**
(1a + 1b output)
- **LOW LED OPERATING CURRENT:**
 $I_F = 2 \text{ mA}$
- **DESIGNED FOR AC/DC SWITCHING LINE CHANGER**
- **SMALL PACKAGE:**
8 pin DIP
- **LOW OFFSET VOLTAGE**
- **SURFACE MOUNT AVAILABLE:**
PS7141L-1C

DESCRIPTION

The PS7141-1C and PS7141L-1C are transfer type solid state relays containing normally open (N.O.) contacts and normally closed (N.C.) contacts on the output side. They are suitable for analog signal control because of their low offset and high linearity.

APPLICATIONS


- EXCHANGE EQUIPMENT
- MEASUREMENT EQUIPMENT
- FA/OA EQUIPMENT

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)


PART NUMBER				PS7141-1C, PS7141L-1C		
SYMBOLS		PARAMETERS		UNITS	MIN	MAX
Diode	V_F	Forward Voltage, $I_F = 10 \text{ mA}$		V		1.4
	I_R	Reverse Current, $V_R = 5 \text{ V}$		μA		5.0
MOSFET	I_{OFF}	Off-State Leakage Current,	N.O.: $I_F = 0 \text{ mA}$, $V_D = 400 \text{ V}$ N.C.: $I_F = 10 \text{ mA}$, $V_D = 400 \text{ V}$	μA	0.03	1.0
	C_{out}	Output Capacitance,	N.O.: $V_D = 0 \text{ V}$, $f = 1 \text{ MHz}$ N.C.: $V_D = 0 \text{ V}$, $f = 1 \text{ MHz}$, $I_F = 10 \text{ mA}$	pF/ch	65 185	
Coupled	I_{Fon}	LED On-state Current,	N.O.: $I_L = 150 \text{ mA}$	mA		2.0
	I_{Foff}	LED Off-state Current,	N.C.: $I_L = 150 \text{ mA}$			2.0
	R_{ON1}	On-State Resistance,	N.O.: $I_F = 10 \text{ mA}$, $I_L = 10 \text{ mA}$	Ω	20	30
			N.C.: $I_F = 0 \text{ mA}$, $I_L = 10 \text{ mA}$		24	30
	R_{ON2}		N.O.: $I_F = 10 \text{ mA}$, $I_L = 150 \text{ mA}$, $t \leq 10 \text{ ms}$		16	25
			N.C.: $I_F = 0 \text{ mA}$, $I_L = 150 \text{ mA}$, $t \leq 10 \text{ ms}$		16	25
	$t_{\text{ON}} (\text{N.O.})$	Turn-on Time ¹	$I_F = 10 \text{ mA}$, $V_o = 5 \text{ V}$, $PW \geq 10 \text{ ms}$	ms	0.33	1.0
	$t_{\text{ON}} (\text{N.C.})$				0.02	0.2
	$t_{\text{OFF}} (\text{N.O.})$				0.03	0.2
	$t_{\text{OFF}} (\text{N.C.})$				0.20	1.0
	$R_{\text{I-O}}$	Isolation Resistance, $V_{\text{I-O}} = 1.0 \text{ kVdc}$		Ω	10^9	
	$C_{\text{I-O}}$	Isolation Capacitance, $V = 0 \text{ V}$, $f = 1 \text{ MHz}$		pF/ch	1.1	

Notes:


1. Test Circuit Switching Time:

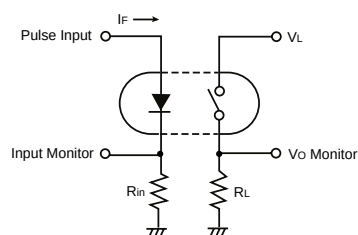


N.O. (between pin 5 and 6)



N.C. (between pin 7 and 8)



PS7141-1C, PS7141L-1C



PS7141-1C, PS7141L-1C

ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)


SYMBOLS	PARAMETERS	UNITS	RATINGS
Diode			
I _F	Forward Current (DC)	mA	50
V _R	Reverse Voltage	V	5.0
P _D	Power Dissipation	mW/ch	50
I _{FP}	Peak Forward Current ²	A	1
MOSFET			
V _L	Break Down Voltage	V	400
I _L	Continuous Load Current	mA	150
I _{LP}	Pulse Load Current ³ AC/DC Connection	mA	300
P _D	Power Dissipation	mW/ch	375
BV	Isolation Voltage ⁴	Vr.m.s.	1500
P _T	Total Power Dissipation	mW	850
T _A	Operating Ambient Temp.	°C	-40 to +80
T _{STG}	Storage Temperature	°C	-40 to +100

Notes:


1. Operation in excess of any one of these parameters may result in permanent damage.
2. PW = 100 μs, Duty Cycle = 1 %.
3. PW = 100 ms, 1 shot.
4. AC voltage for 1 minute at T_A = 25 °C, RH = 60 % between input and output.

OUTLINE DIMENSIONS (Units in mm)

PS7141-1C

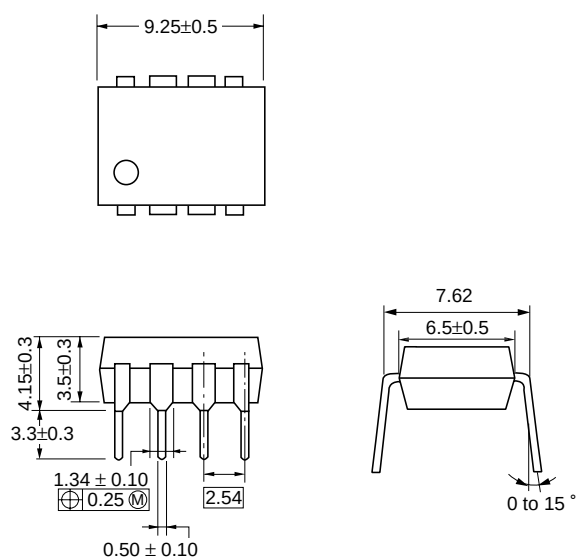


PS7141L-1C

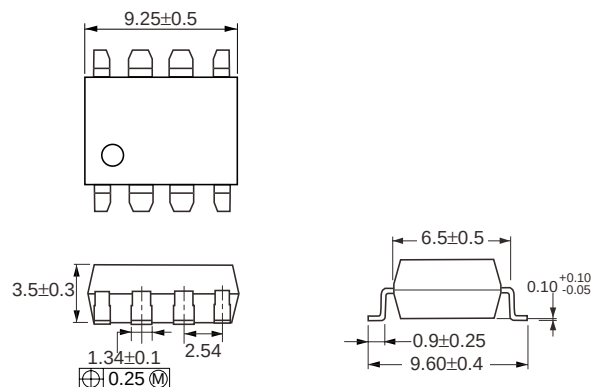


PS7141-1C, PS7141L-1C

TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)


**MAX FORWARD CURRENT
vs. AMBIENT TEMPERATURE**

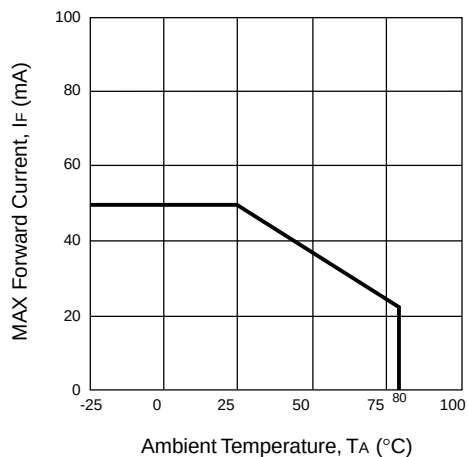


**MAX LOAD CURRENT
vs. AMBIENT TEMPERATURE**

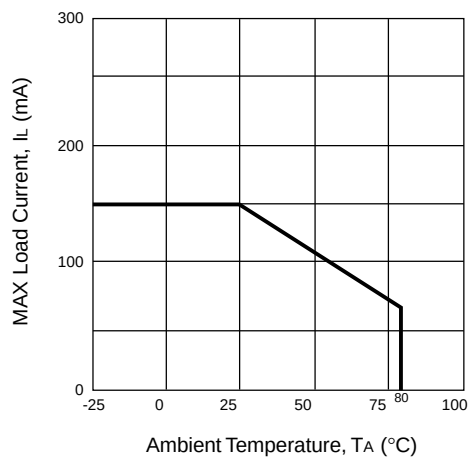


**FORWARD VOLTAGE vs.
AMBIENT TEMPERATURE**

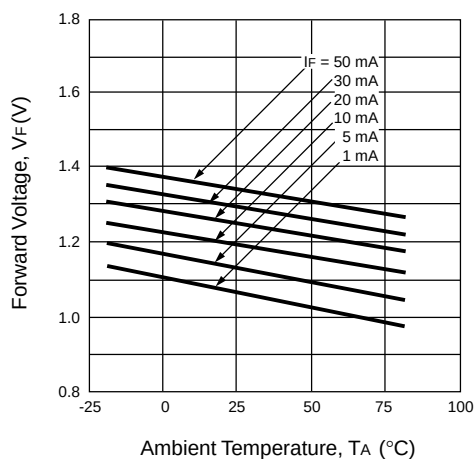


**OUTPUT CAPACITANCE
vs. APPLIED VOLTAGE**

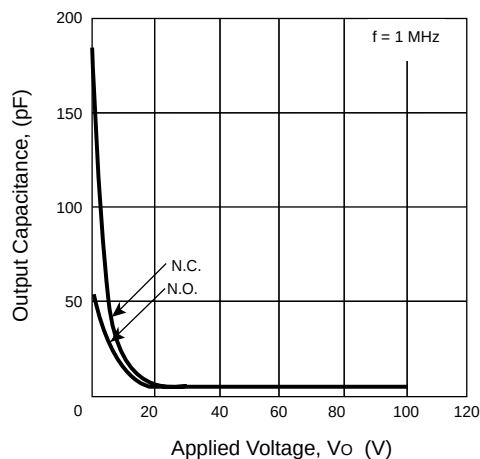

**OFF-STATE LEAKAGE CURRENT
vs. APPLIED VOLTAGE**

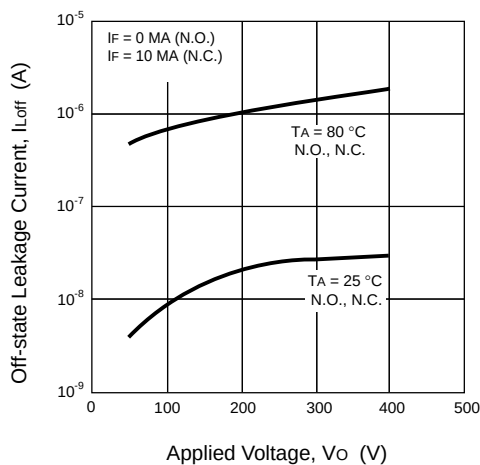


**LOAD CURRENT vs.
LOAD VOLTAGE**

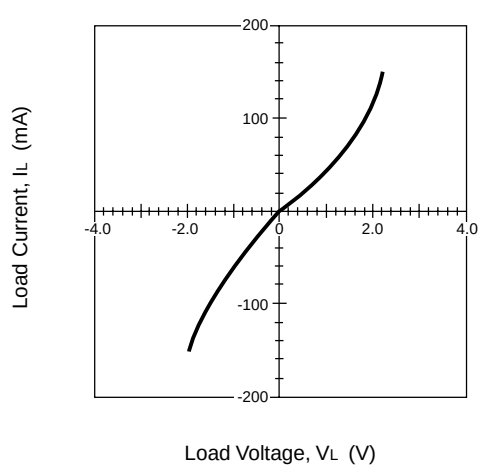


PS7141-1C, PS7141L-1C

TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)


**TURN-ON TIME vs.
FORWARD CURRENT**

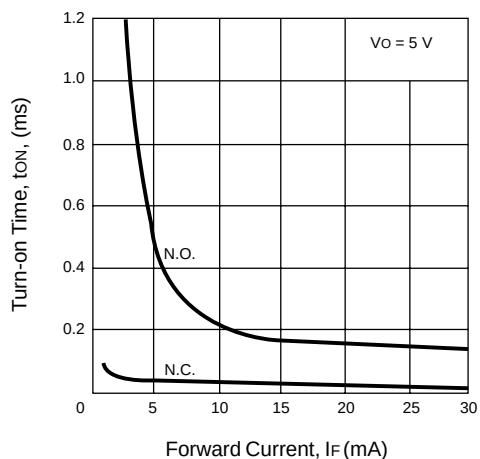


**TURN-OFF TIME vs.
FORWARD CURRENT**

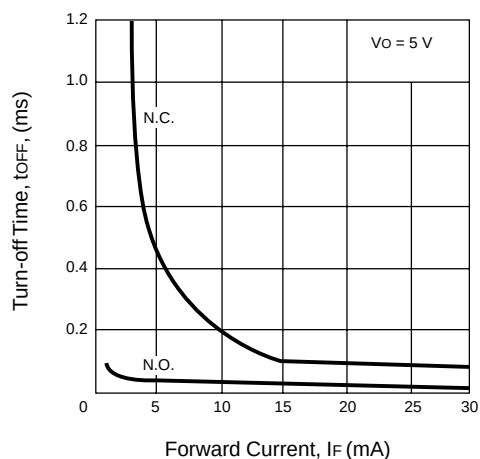


**NORMALIZED TURN-ON TIME
vs. AMBIENT TEMPERATURE**

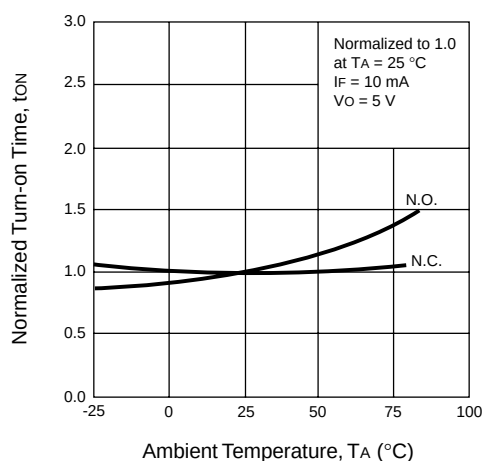

**NORMALIZED TURN-OFF TIME
vs. AMBIENT TEMPERATURE**

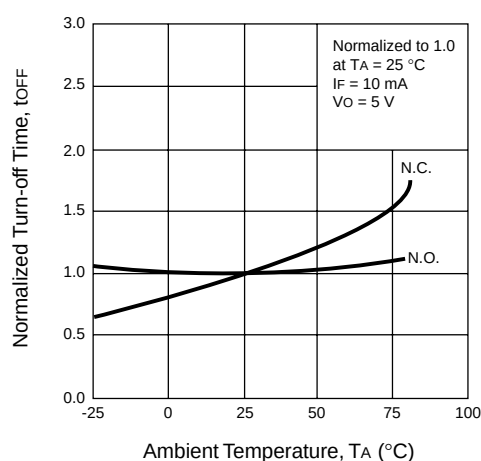


**NORMALIZED ON-STATE RESISTANCE
vs. AMBIENT TEMPERATURE**

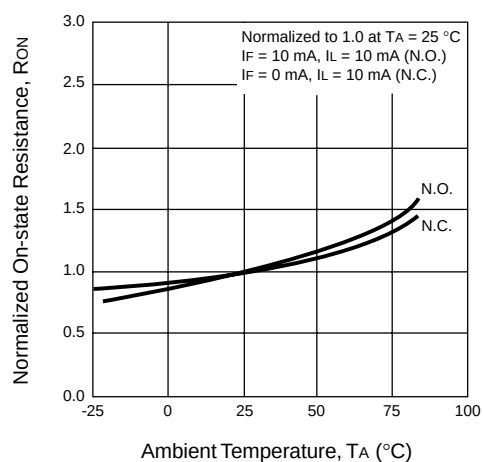


TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)


**ON-STATE RESISTANCE (N.O.)
DISTRIBUTION**

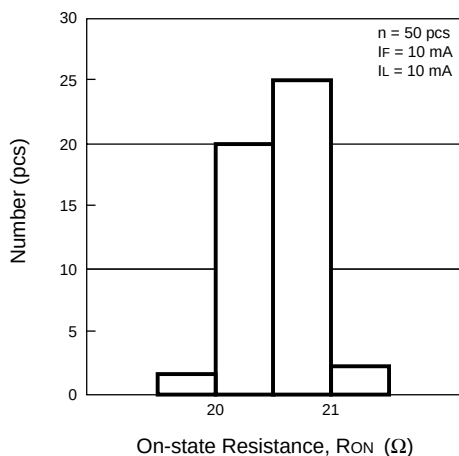


**ON-STATE RESISTANCE (N.C.)
DISTRIBUTION**

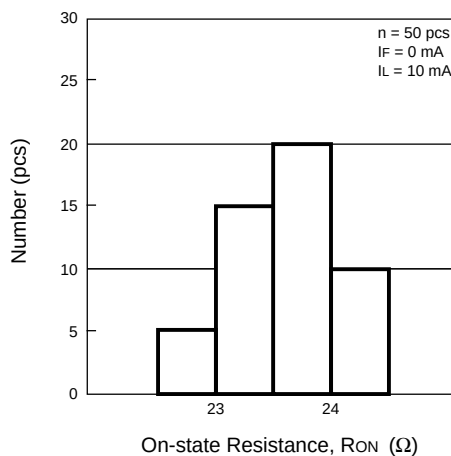


TURN-ON TIME (N.O.) DISTRIBUTION

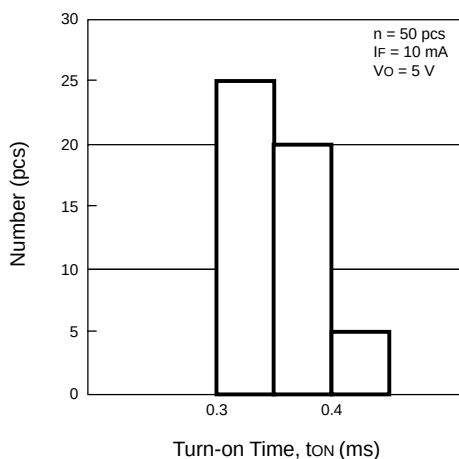


TURN-ON TIME (N.C.) DISTRIBUTION

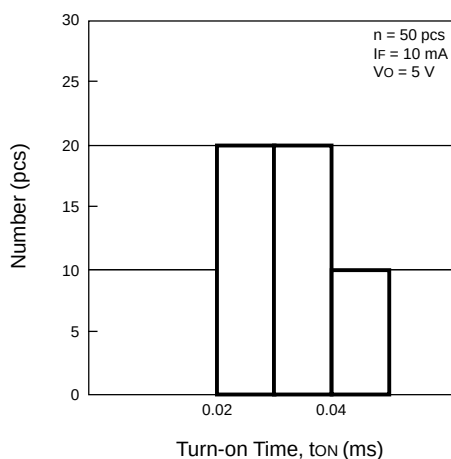

TURN-OFF TIME (N.O.) DISTRIBUTION

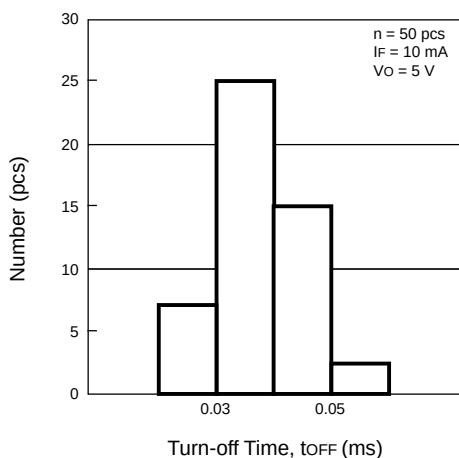


TURN-OFF TIME (N.C.) DISTRIBUTION

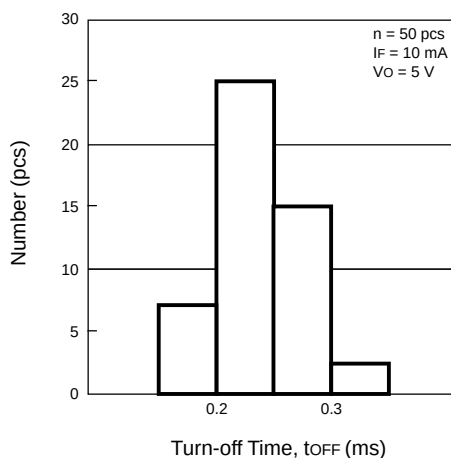


PS7141-1C, PS7141L-1C

TAPING SPECIFICATIONS (Units in mm)

OUTLINE AND DIMENSIONS (TAPE)

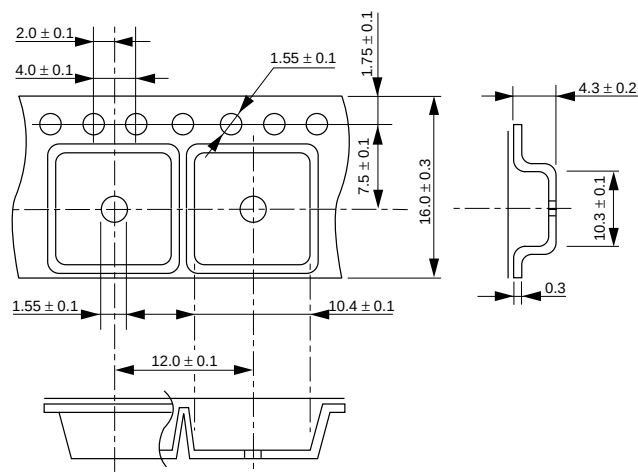

OUTLINE AND DIMENSIONS (REEL)

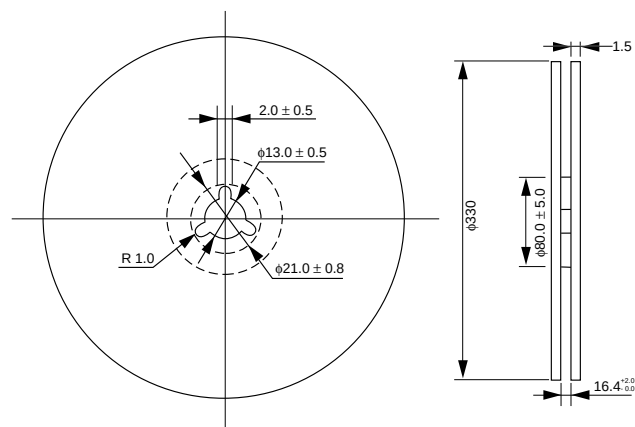


Packaging : 1000 pcs/reel

TAPING DIRECTION

PS7141L-1C-E3

PS7141L-1C-E4

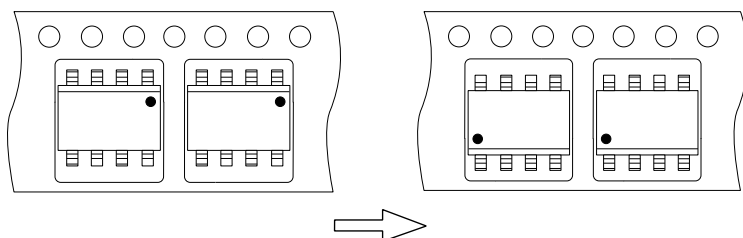


RECOMMENDED SOLDERING CONDITIONS

(1) Infrared reflow soldering

- Peak reflow temperature 235 °C or below (package surface temperature)
- Time of temperature higher than 210 °C 30 seconds or less
- Number of reflows Two
- Flux Rosin flux containing small amount of chlorine
(The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

Recommended Temperature Profile of Infrared Reflow

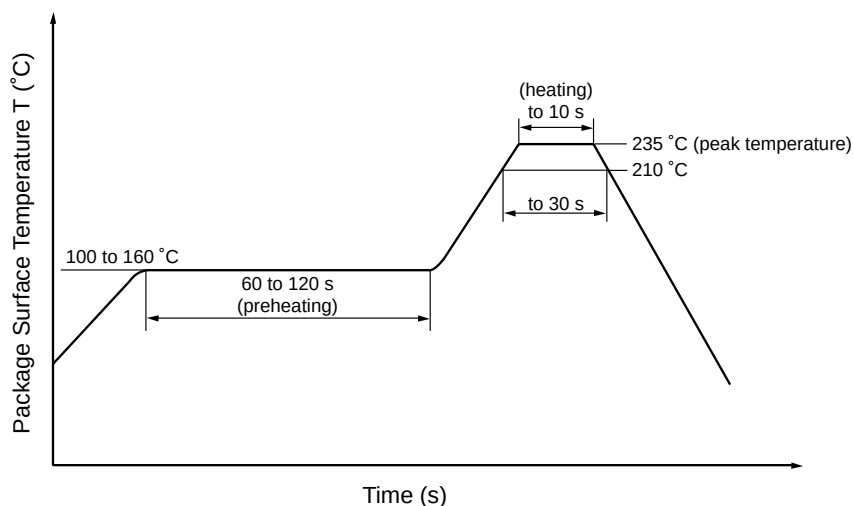

(2) Dip soldering

- Temperature 260 °C or below (molten solder temperature)
- Time 10 seconds or less
- Number of times One
- Flux Rosin flux containing small amount of chlorine
(The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

(3) Cautions

- Fluxes
Avoid removing the residual flux with freon-based cleaning solvent.