

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0561198228](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

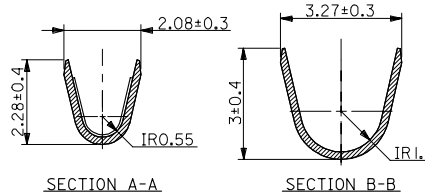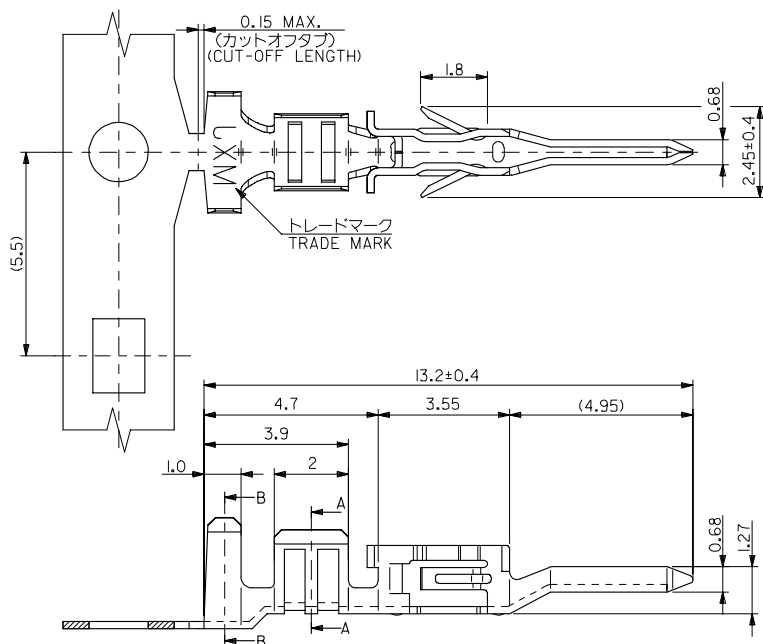

注記
NOTES

- 材質
MATERIAL
りん青銅 (板厚: 0.2)
PHOSPHOR BRONZE (THICKNESS: 0.2)
- メッキ仕様
TERMINAL PLATING
接点部: 金メッキ 0.25 μm MIN.
CONTACT AREA: GOLD 0.25 μm MIN.
圧着部: 銅メッキ 1.0 μm MIN.
CRIMP AREA: TIN 1.0 μm MIN.
下地メッキ: ニッケルメッキ 2 μm MIN.
UNDER PLATE: NICKEL 2 μm MIN.
- 適用電線: UL1007, AWG #18~22
APPLICABLE WIRE RANGE: UL1007, AWG #18~22
- 被覆外径: φ2.2 MAX.
INSULATION EXTERNAL DIA: φ2.2 MAX.
- 適用ハウジング: 51233-****, 51234-****
APPLICABLE HOUSING: 51233-****, 51234-****

バラ状 LOOSE	56119-8328	56119-8***
連続状 CHAIN	56119-8228	
端子形状 TERMINAL CONFIGURATION	MATERIAL No.	MODEL No.

GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		DESIGN UNITS SCALE		THIRD ANGLE PROJECTION	
10 UNDER	±0.2	DRAWN BY	DATE	TITLE			
10 OVER 30 UNDER	±0.25	YSUGIURA	2005/03/02	COMPACT ROBOT CONN. (CRC) CRIMP PIN -LEAD FREE-			
30 OVER	±0.3	CHECKED BY	DATE				
ANGULAR	±3°	MTANAKA	2005/03/02				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE				
		NUKITA	2005/03/02				
		MATERIAL NO.	DOCUMENT NO.				
		SEE CHART	SD-56119-004				
		SIZE					
		A3					