

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0887329100](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DWG. NO.  
SD-88732-9\*00

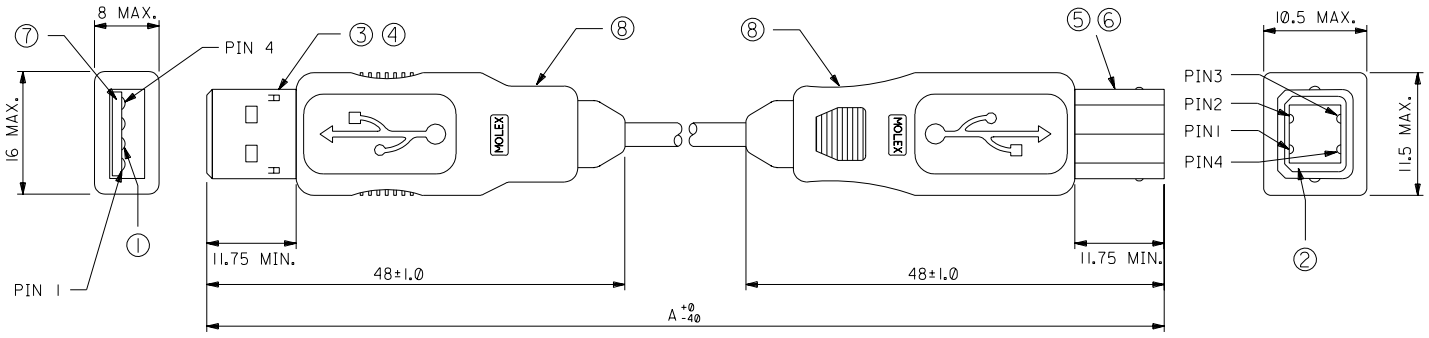


BRAID/DRAIN	AWG#20	AWG#28	AWG#28	AWG#20	5.0	5010	88732-9400	4
	AWG#22	AWG#28	AWG#28	AWG#22	5.0	3340	88732-9300	
	AWG#24	AWG#28	AWG#28	AWG#24	4.7	2090	88732-9200	
	AWG#26	AWG#28	AWG#28	AWG#26	4.2	1320	88732-9100	
	AWG#28	AWG#28	AWG#28	AWG#28	4.2	820	88732-9000	
DRAIN WIRE	BLACK	GREEN	WHITE	RED	ケーブル外径 FINISH DIAMETER	A	製品番号 MATERIAL NO.	種数 CIRCUITS
	ファイヤーサイズ WIRE SIZE							

DO NOT SCALE DRAWING	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	RELEASED EC NO. JD2000-0857 DRWN: YUKUJIMA 2000/02/17 CHK: MASAO 2000/02/17 APPR: HIKESUGI 2000/02/17	MATERIAL 材料	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS mm <input type="checkbox"/> INCH <input type="checkbox"/>	THIRD ANGLE PROJECTION <input checked="" type="checkbox"/>	SHT	REV		
							SEE SHEET 2	10 UNDER 未満	0.2	DRAWN BY & DATE <i>Y. Kajima</i> 2000/02/17	TITLE: USB A-B I/O CABLE	INCH <input type="checkbox"/>	MM <input checked="" type="checkbox"/>	ONLY	REVISE ON CAD ONLY
							FINISH 仕上り	10 OVER 以上	30 UNDER 未満	0.25	CHECKED BY & DATE <i>H. Sano</i> 2000/02/17	APPROVED BY & DATE <i>Y. Kajima</i> 2000/02/17	MATERIAL NO. SEE CHART	DRAWING NO. SD-88732-9*00	SHEET NO. 1 OF 2
						DESCRIPTION	WIRE RANGE 適用電線範囲	ANGLE 角度	3°	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			SIZE B		
					0	REV	INS. RANGE 被覆外径						EN-02J(097)MXJ-54		

88732-9\*00-54 JGON

注記 )  
NOTES.

1. ケーブル構造  
CABLE CONSTITUTION



WIRE COLOR (SIGNAL NAME)	接点 CONTACT NUMBER	
	USB-A	USB-B
RED (V)	#1	#1
WHITE (-DATA)	#2	#2
GREEN (+DATA)	#3	#3
BLACK (GND)	#4	#4
DRAIN WIRE	SHEEL	SHEEL

2. 部品構成  
PART CONSTRUCTION

	部品名 PARTS NAME	材質 MATERIALS	処理 FINISH
①	TERMINAL	銅合金 COPPER ALLOY	接点部 : 金メッキ + パラジウムニッケル CONTACT AREA : GOLD + PALLADIUM-NICKEL
②	HOUSING	GLASS FILLED HEAT RESISTANT PLASTIC + GOLD FLASH COLOR : WHITE	— # —
③	USB-A FRONT SHELL	鋼 STEEL	下地 : 銅めっき、光沢 半田めっき UNDER PLATING : COPPER, LIGHT TIN PLATING
④	USB-A REAR SHELL	鋼 STEEL	下地 : 銅めっき、光沢 半田めっき UNDER PLATING : COPPER, LIGHT TIN PLATING
⑤	USB-B FRONT SHELL	鋼 STEEL	下地 : 銅めっき、光沢 半田めっき UNDER PLATING : COPPER, LIGHT TIN PLATING
⑥	USB-B REAR SHELL	鋼 STEEL	下地 : 銅めっき、光沢 半田めっき UNDER PLATING : COPPER, LIGHT TIN PLATING
⑦	CRIMP HOUSING	GLASS FILLED HEAT RESISTANT PLASTIC + GOLD FLASH COLOR : WHITE	— # —
⑧	OVER MOLD HOUSING	POLYVINYL CHLORIDE COLOR : FROST WHITE	— # —

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	RELEASED EC NO. JD2000-0857 DRWN: YUKUJIMA 00/02/17 CHK: MASASAO 00/02/17 APPR: HIKESUGI 00/02/17	MATERIAL 材料 部品構成表参照 SEE PART CONSTRUCTION	FINISH 仕上り 部品構成表参照 SEE PART CONSTRUCTION	WIRE RANGE 適用電線範囲 — # —	INS. RANGE 被覆外径 — # —	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS mm INCH	THIRD ANGLE PROJECTION	DIMENSIONS: mm INCH	SHT REV	
										10 UNDER 未満	+0.2	DRAWN BY & DATE Y. Kajima 00/02/17	mm INCH	mm ONLY	REVISE ON CAD ONLY	
										10 OVER 以上	+0.25	CHECKED BY & DATE H. Sano 00/02/17	TITLE: USB A-B I/O CABLE			
										30 OVER 以上	+0.3	APPROVED BY & DATE S. Hasegawa 00/02/17	MOLEX INCORPORATED			
										ANGLE 角度	+3°	CAD FILENAME 887329*00.S02	MATERIAL NO. SEE CHART	DRAWING NO. SD-88732-9*00	SHEET NO. 2 OF 2	
										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						SIZE B
										EN-02J(097) MXJ-54						

887329\*00-502J.DWG