

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[TL59CF160Q](#)

For any questions, you can email us directly:

sales@integrated-circuit.com





REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	16892	UPDATE NOTES, .30 TO .25	1/19/07	TN
A	11623	RELEASED FOR PRODUCTION	8/21/01	CB

SCALE	DATE	DR	DWG	REV
2:1	1/19/2007	TN	P010581	B

E-SWITCH®

TITLE: TL59CF160Q

RECOMMENDED P.C.B. LAYOUT

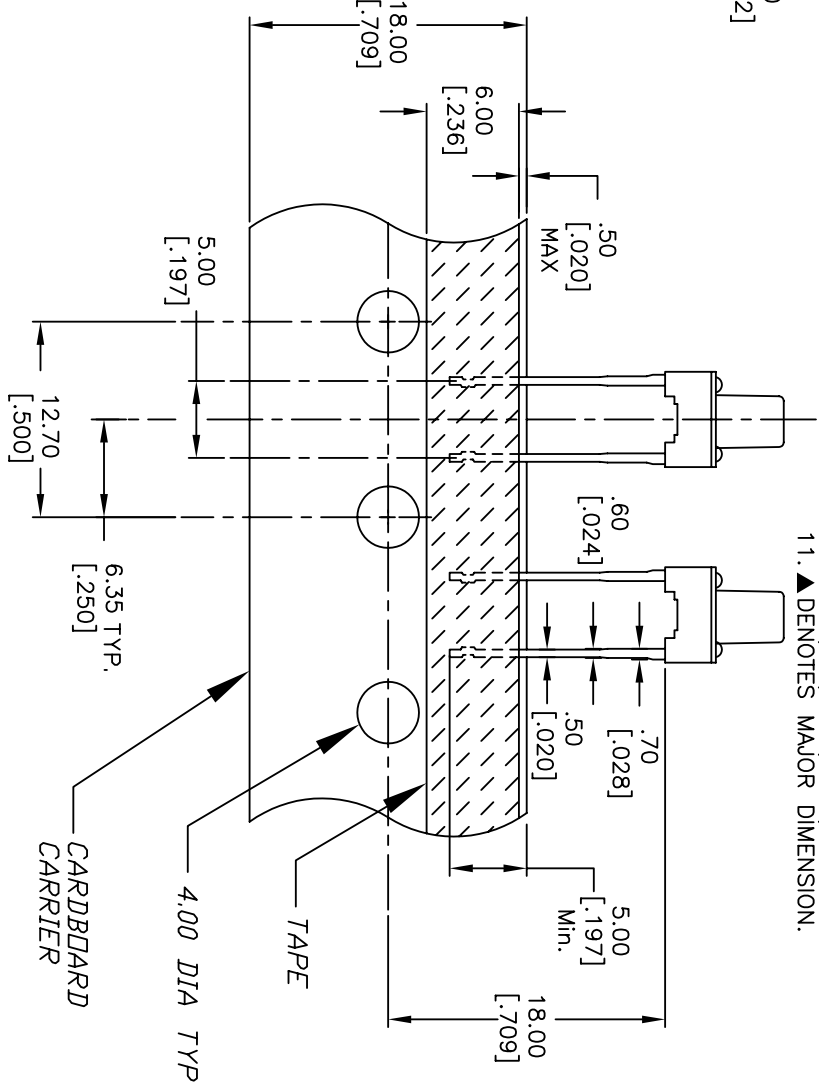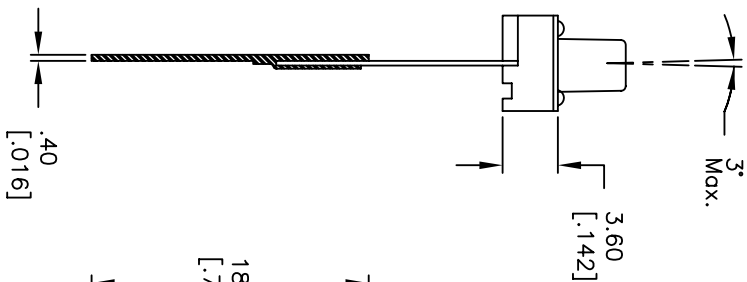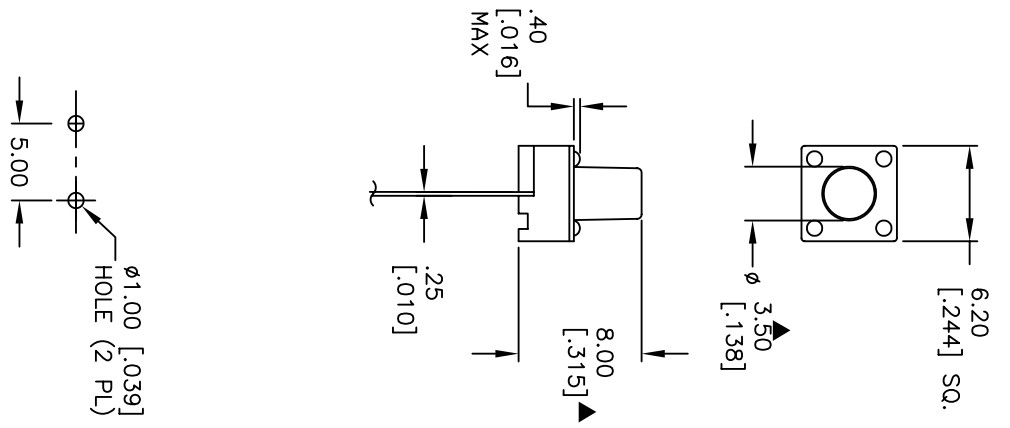

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. CONTACT RATING: 50mA @12V DC
 4. CONTACT MATERIAL: SILVER
 5. OPERATING FORCE: 160±50gf
 6. TRAVEL: 0.25 +0.2/-0.1
 7. CONTACT RESISTANCE: 100mΩ Ohms max.
 8. ELECTRICAL LIFE: 100,000 CYCLES
 9. PACKAGING: CARRIER IS FOLDED EVERY 25 PITCHES (24) SWITCHES PER FOLD (1,000) SWITCHES PER BOX
 10. 2002/95/EC (ROHS) COMPLIANT
 11. ▲ DENOTES MAJOR DIMENSION.