

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Grayhill, Inc.](#)
[26ASD45-01-1-AJS](#)

For any questions, you can email us directly:
sales@integrated-circuit.com




Mechanical Encoders

SERIES 26
 Binary and Gray Code

- AVAILABLE CODES**
- Hexadecimal
 - Octal
 - BCD (Adjusted)
 - Quadrative
 - Custom (4-Bit, 16 position maximum)
 - RoHS Compliant



DIMENSIONS in inches (and millimeters)

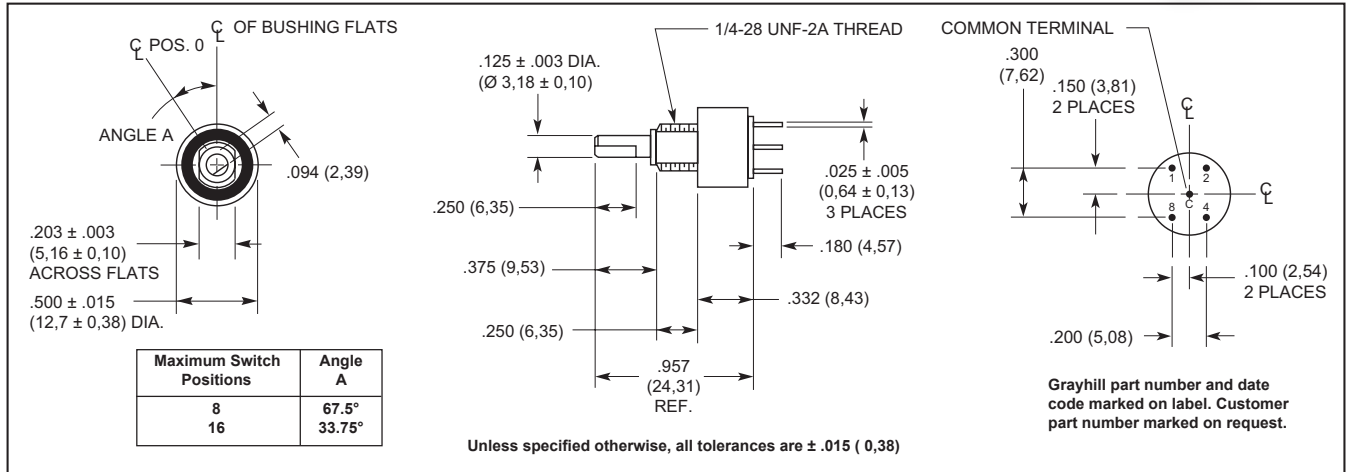

SPECIFICATIONS

Electrical Ratings

Rated: 25,000 cycles with logic compatible loads. Make and break 200 mA.
Contact Resistance: 500 milliohms maximum (less than 100 milliohms initially)
Insulation Resistance: 1000 megohms minimum (10,000 megohms initially)
Dielectric Strength: 250 Vac minimum

Materials and Finishes

Panel Seal: Silicone Rubber
Shaft Seal: Fluorosilicone
Mounting Nut (mounting hardware—one per switch): Brass, tin/zinc-plated
Internal Tooth Lockwasher (mounting hardware): Steel, tin/zinc-plated
Detent Balls: Carbon steel, nickel-plated
Detent Spring: Pretinned music wire
Detent Rotor: Thermoplastic
Shaft, Stop Arm and Stop Pins: Stainless steel
Bushing: Zamak II tin/zinc alloy, zinc-plated
Switch Base: Diallyl phthalate
Printed Circuit Board: NEMA Grade FR-4.
Terminals: Brass, gold-plated over nickel plate
Contacts: Copper alloy, gold-plated over nickel plate

Additional Characteristics

Rotational Torque: 4 to 8 oz-in initial
Vibration Resistance: 10 to 55 Hz at 0.060" double amplitude; no damage and no contact openings per MIL-STD-202, Method 201A
Shock Resistance: Passes medium requirement MIL-DTL-3786 (MIL-STD-202, Method 213)
Stop Strength: 5 in-lbs minimum
Relative Humidity: 90-95% at 40°C for

240 hours (MIL-STD-202 Method 103, Test Condition A)

Shaft and Panel Seal

All switches are provided with a shaft and panel seal.

OPTIONS

Adjustable Stop Switches

The switch may have continuous rotation, or be adjusted to limit the rotation. The panel seal ring can be removed to expose the stop pin holes on the front of the switch. Two stop pins and panel seal o-ring are supplied with the switch. One or both may be used to limit the rotation as desired.

Custom encoders with options such as custom code output, 1/4" shaft diameter, factory set stops and longer shaft terminal lengths are available by contacting the Grayhill sales office.

ORDERING INFORMATION

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, or an authorized local Distributor or Grayhill through grayhill.com/where-to-buy.

CODE AND TRUTH TABLE

Switch Position	Code Position	BCD Output*				Gray Output*			
		1	2	4	8	1	2	4	8
1	0								
2	1	●				●			
3	2		●			●	●		
4	3	●	●				●		
5	4			●			●	●	
6	5	●	●	●		●	●	●	
7	6		●	●		●		●	
8	7	●	●	●				●	
9	8				●			●	●
10	9	●			●	●		●	●
11	10		●		●	●	●	●	●
12	11	●	●		●		●	●	●
13	12			●	●		●		●
14	13	●		●	●	●	●		●
15	14		●	●	●	●			●
16	15	●	●	●	●				●

*Dot indicates terminal tied to common.

