

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)  
[101-1010-BL-00300](#)

For any questions, you can email us directly:



[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

UNIT: mm

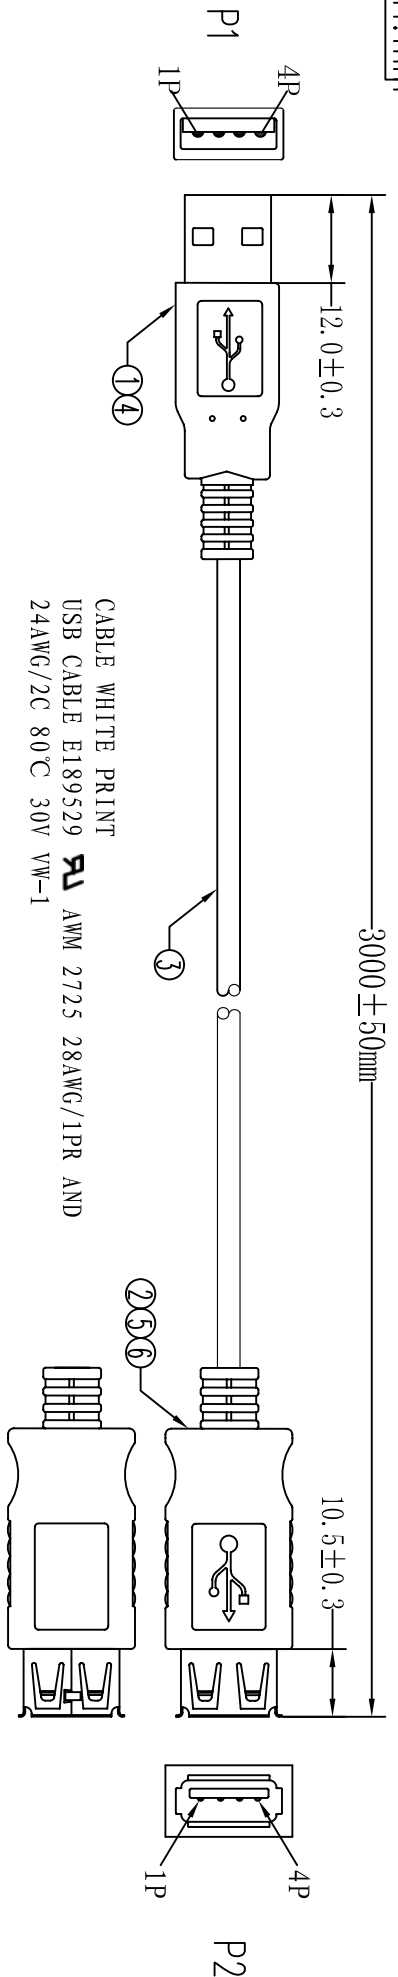

CABLE WHITE PRINT  
 USB CABLE E189529  
 24AWG/2C 80°C 30V VW-1  
 AWM 2725 28AWG/1PR AND

**PIN ASSIGNMENT:**

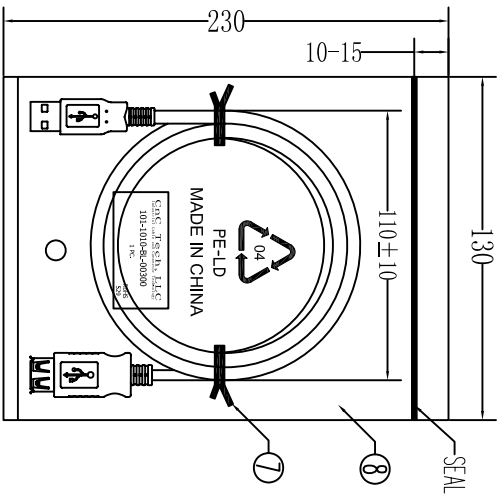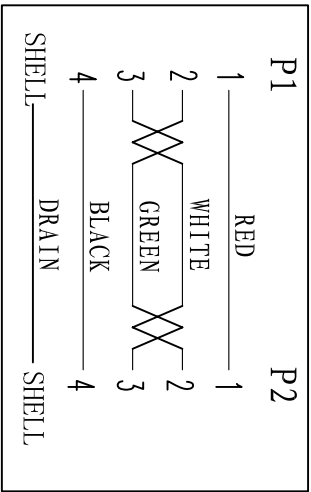

IPC/PE BAG

③	PE BAG	L/10	CLEAR SIZE: 280*330*40.05mm PRINT BLACK "MADE IN CHINA" + "10PCS".
④	PE BAG	1	CLEAR SIZE: 130*230*40.05mm PRINT BLACK "MADE IN CHINA" + "1PC".
⑦	TIE	2	BLACK L=100mm
⑥	IN JACKET	3g	CLEAR LDPE (MOULD NO: NM-027)
⑤	OUT JACKET	7g	BLACK PVC-40P (MOULD NO: MW-83)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: MW-40)
③	CABLE	1	BLACK USB1. 1 UL2725 28#/1P+24#/2C+AEB OD: 4.7mm L=3000±10mm
②	CONN	1	USB A FEMALE SHELL: NICKEL PIN G/F SHORT TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB A MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE

SPECIFICATION

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

**CNC Tech, LLC**

Industrial Cable and Connector Technology

DRAWN	Andy	DRAWING NO	VG/LUQ-094-009
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1010-BL-003
DECIDED		DATE	2013-8-23
VERSIONS/EDITION	A/0	PROJECTION	