

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0002091122](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



PART NO.	ENG. NO.
02-09-1122	2273-A(P90 I)
02-09-1123	2273-A(P90 I) L
	-
	-
	-
	-
	-

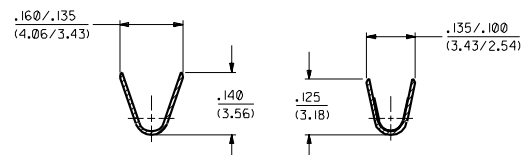


SECTION "A-A"

SECTION "B-B"

LEGEND
2273-A(****)*
FORM BLANK-CHAIN L=LOOSE
P=PREPLATE BLANK=POSTPLATE FINISH CODE

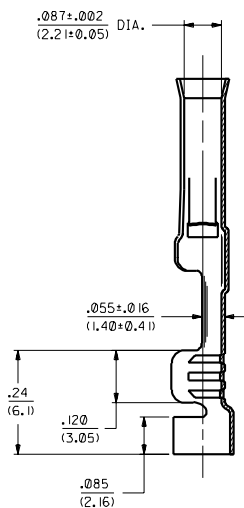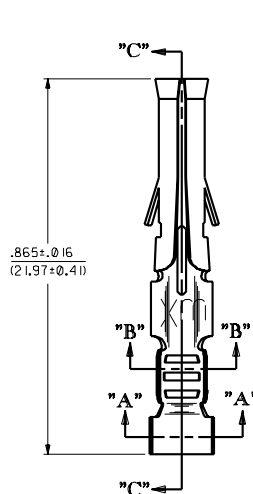

SECTION "C-C"

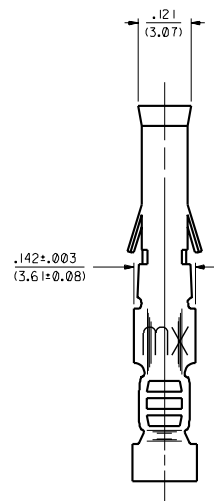

NOTES:

1. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 18 THRU 22 AWG WIRE.
2. INSERTION FORCE: 2.0 LBS. AVG. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
3. CONTACT RETENTION: 20 LBS. MIN.
4. THIS PART CONFORMS TO PRODUCT SPEC. 02-09.

MATERIAL NOTES:

1. CARTRIDGE BRASS, ALLOY #C26000
.008/(0.20) THICK, SPRING TEMPER

FINISH CODES:

901 HOT TIN DIP .000020/(0.00051) MIN.

CHAIN FORM
FULL SCALE



DIMENSIONS SHOWN (METRIC) INCH		UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ± 1°	
± PLATE	± .010	± .010	± .010
± PLATE	± .014	± .025	± .025
± PLATE	± .036	± .036	± .036
DRAFT, WHEN APPLICABLE, MUST REMAIN WITHIN DIMENSIONS			
DRWG. BY: GWF	CHK'D. BY: RW	SCALE: 6 : 1	DATE: 4/5/91
TITLE: CRIMP TERM., FEMALE .093/(2.36) DIA. FOR 18 THRU 22 AWG WIRE		REVISE ONLY ON CAD SYSTEM	
MOLEX INCORPORATED		SHEET NO. 1 of 1	
PART NO. SD-2273-*		DRAWN NO. CP	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			

B	REVISE PER ECR US 0799	2/10/94	RW
A	FINAL RELEASE ECR UI 0722	4/5/91	RW