



Distributor of Molex Connector Corporation: Excellent Integrated System Limited
Datasheet of 0190190026 - Connector Quick Connect Receptacle 14-16 AWG 0.110"
(2.79mm) Crimp

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)
[0190190026](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

This document was generated on 03/07/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0190190026](#)
Status: **Active**
Overview: [Standard Quick-Disconnect Terminals](#)
Description: Avikrimp™ Quick Disconnect, Female, for 14-16 (2.00-1.30mm²) Wire, Mylar Tape, Tab 2.79 x 0.81mm

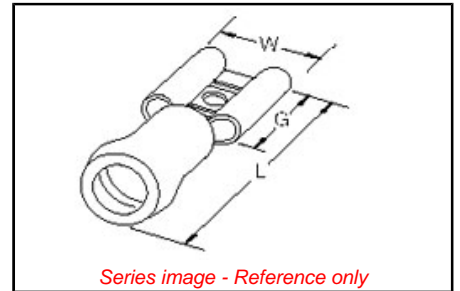

Documents:

- [Drawing \(PDF\)](#)
- [Product Specification PS-19902-011 \(PDF\)](#)
- [Product Specification PS-19902-014 \(PDF\)](#)
- [Product Specification PS-19902-015 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
 UL E79133

General

Product Family Quick Disconnects
 Series [19019](#)
 Crimp Quality Equipment Yes
 Insulated Partial
 Overview [Standard Quick-Disconnect Terminals](#)
 Product Name Avikrimp™
 Type Quick Disconnect
 UPC 800753038141

Physical

Barrel Type Closed
 Color - Resin Blue
 Flammability 94V-2
 Gender Female
 Glow-Wire Compliant No
 Insulation Nylon (PA)
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Net Weight 0.623/g
 Orientation Straight
 Packaging Type Adhesive Tape on Reel
 Polarized to Mating Part No
 Tab Thickness 0.81mm
 Tab Width 2.79mm
 Temperature Range - Operating -65°C to +105°C
 Wire Insulation Diameter 3.50mm max.
 Wire Size AWG 14, 16
 Wire Size mm² 1.30-2.00

Electrical

Voltage - Maximum 300V

Solder Process Data

Lead-free Process Capability N/A

Material Info

Old Part Number BB-8135T

Reference - Drawing Numbers

Product Specification PS-19902-011, PS-19902-014, PS-19902-015

EU ELV

Not Relevant

EU RoHS

Compliant
REACH SVHC
 Not Contained Per
 -ED/79/2015 (17
 December 2015)

China RoHS

**Halogen-Free
 Status**

Low-Halogen

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any
 non-product compliance questions.

China ROHS Green Image
 ELV Not Relevant

Search Parts in this Series

[19019 Series](#)

Application Tooling | FAQ

*Tooling specifications and manuals are
 found by selecting the products below.
 Crimp Height Specifications are then
 contained in the Application Tooling
 Specification document.*

Global

Description	Product #
Mini-Mac™ Applicator	0638850900
ATP Crimp Dies for the Tape Crimp Module and ATP-101 & 301 Press	0192880145



Distributor of Molex Connector Corporation: Excellent Integrated System Limited
Datasheet of 0190190026 - Connector Quick Connect Receptacle 14-16 AWG 0.110"
(2.79mm) Crimp

| Sales Drawing

SD-19019-001
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

This document was generated on 03/07/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION