

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Comchip Technology](#)

[CDBA240LL-HF](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## Ultra Low VF SMD Schottky Barrier Rectifiers



# CDBA240LL-HF

**Reverse Voltage: 40 Volts**  
**Forward Current: 2.0 Amp**  
**RoHS Device**  
**Halogen free**




### Features

- Low Profile surface mount applications in order to optimize board space.
- Low power loss, high efficiency.
- High current capability, low forward voltage drop.
- High surge capability.
- Guard ring for overvoltage protection.
- Ultra high-speed switching.
- Silicon epitaxial planar chip, metal silicon junction.

### Mechanical data

- Case: JEDEC DO-214AC / SMA, molded plastic.
- Epoxy: UL 94V-0 rate flame retardant.
- Terminals: Solder plated, Solderable per MIL-STD-750, method 2026.
- Polarity: Indicated by cathode band.
- Mounting position: Any.
- Weight: 0.055 grams

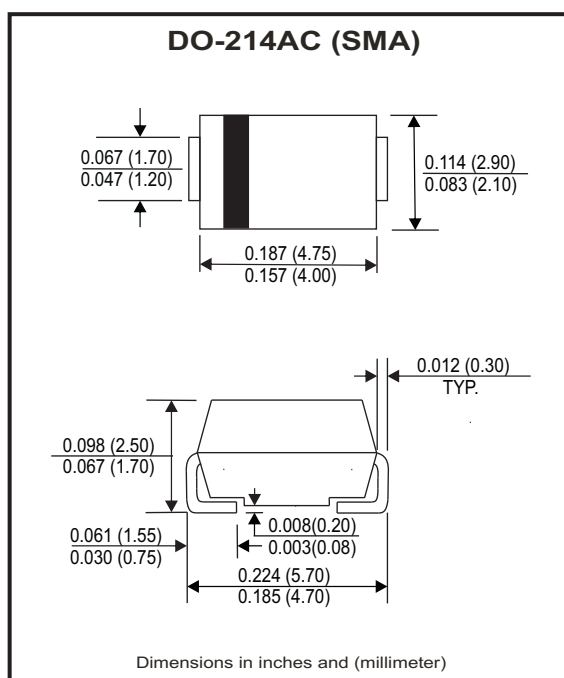

### Maximum Ratings and Electrical Characteristics

Ratings at  $T_a=25^{\circ}\text{C}$  unless otherwise noted.  
 Single phase, half wave, 60Hz, resistive or inductive loaded.  
 For capacitive load, derate current by 20% .

Parameter	Symbol	CDBA240LL-HF	Unit
Max. Recurrent Peak Reverse Voltage	$V_{RRM}$	40	V
Max. RMS Voltage	$V_{RMS}$	28	V
Max. DC Blocking Voltage	$V_{DC}$	40	V
Max. Instantaneous Forward Voltage @2.0A, $T_A=25^{\circ}\text{C}$	$V_F$	0.35	V
Max. Forward Rectified Current (See Fig.1)	$I_o$	2.0	A
Max. Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	70	A
Max. Reverse Current	$V_R=V_{RRM}$ $T_J=25^{\circ}\text{C}$	1.0	mA
	$V_R=V_{RRM}$ $T_J=100^{\circ}\text{C}$	20	
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	70	$^{\circ}\text{C}/\text{W}$
Typical Diode Junction Capacitance(Note 2)	$C_J$	160	pF
Operating Temperature Range	$T_J$	-50 to +100	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-50 to +150	$^{\circ}\text{C}$

NOTES:

1. Thermal resistance from junction to ambient.
2. F=1MHz and applied 4V DC reverse Voltage.

# Ultra Low VF SMD Schottky Barrier Rectifiers



## RATING AND CHARACTERISTIC CURVES (CDBA240LL-HF)

Fig.1 - Typical Forward Current Derating Curve

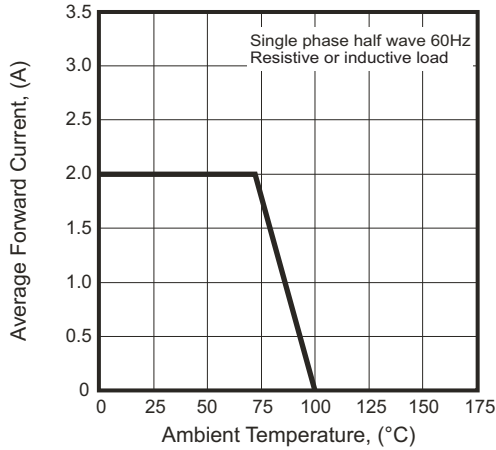


Fig.2 - Typical Forward Characteristics

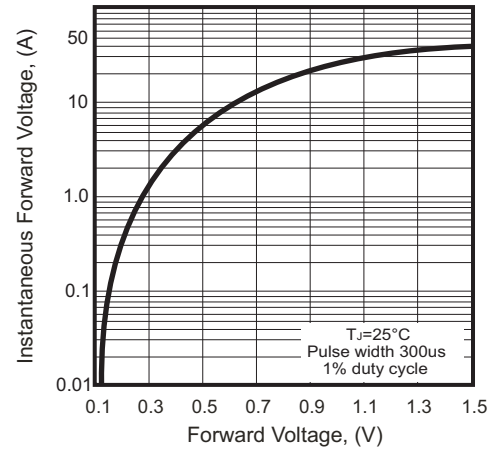


Fig.3 - Maximum Non-repetitive Forward Surge Current

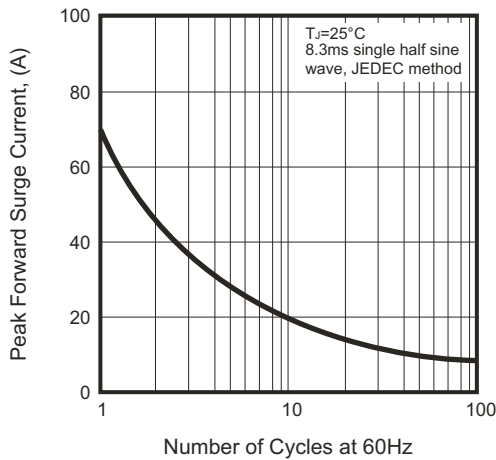


Fig.4 - Typical Junction Capacitance


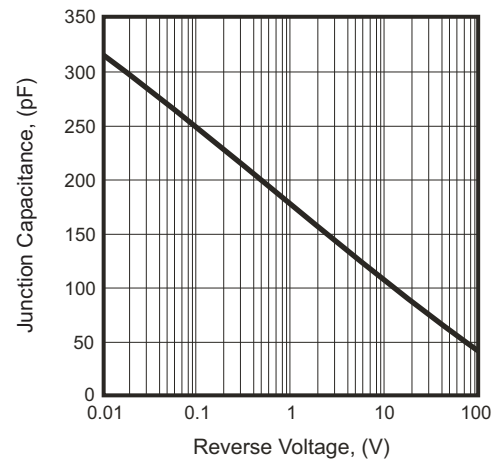






Fig.5 - Typical Reverse Characteristics



# Ultra Low VF SMD Schottky Barrier Rectifiers

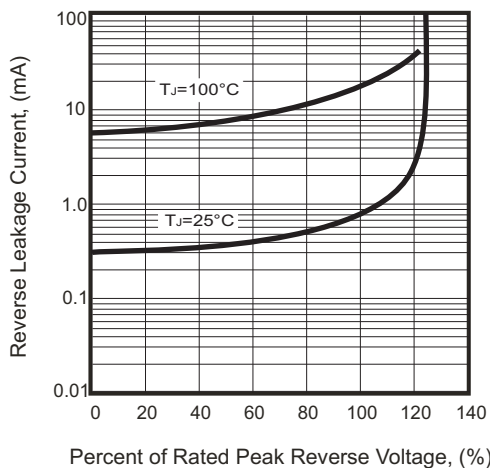

## Reel Taping Specification

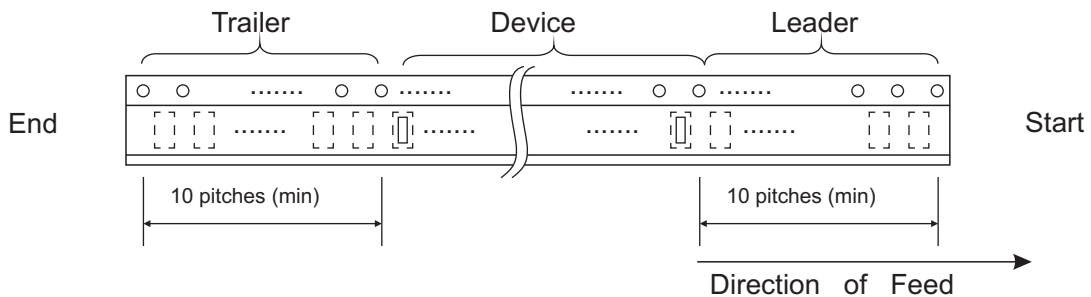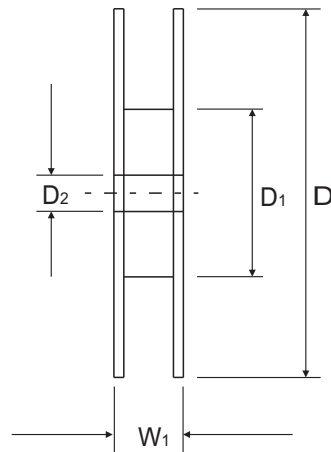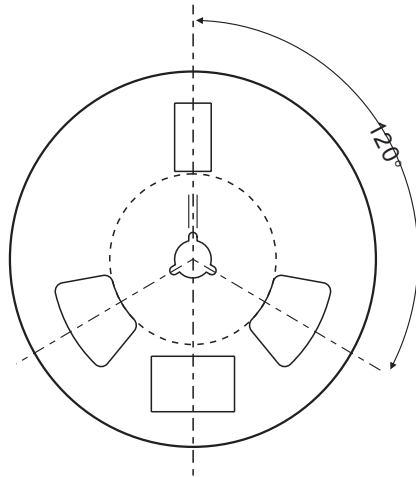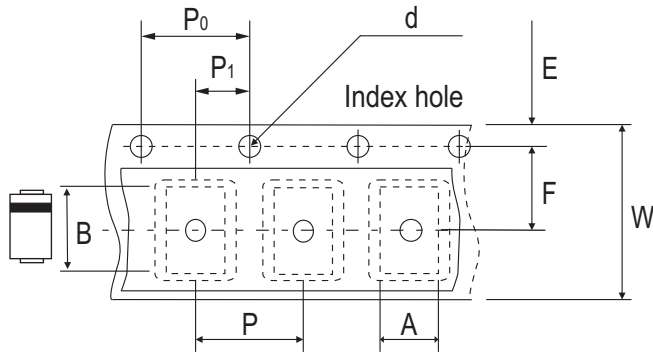

DO-214AC (SMA)	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	2.70 ± 0.10	5.30 ± 0.10	2.66 ± 0.10	1.50 ± 0.10	330 ± 2.00	62.0 MIN.	13.50 ± 0.50
	(inch)	0.106 ± 0.004	0.209 ± 0.004	0.105 ± 0.004	0.059 ± 0.004	12.99 ± 0.079	2.441 MIN.	0.531 ± 0.020


DO-214AC (SMA)	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	0.60 ± 0.10	12.0 ± 0.30	18.40 ± 1.00
	(inch)	0.069 ± 0.004	0.217 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.236 ± 0.004	0.472 ± 0.012	0.724 ± 0.039

# Ultra Low VF SMD Schottky Barrier Rectifiers



## Marking Code


Part Number	Marking Code
CDBA240LL-HF	SLL24

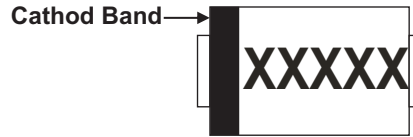

XXXXXX = Product type marking code

## Suggested PAD Layout

SIZE	DO-214AC (SMA)	
	(mm)	(inch)
A	4.00	0.157
B	2.50	0.100
C	1.70	0.068
D	6.50	0.256
E	1.50	0.060

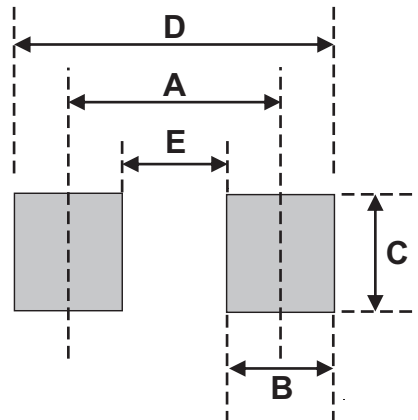

## Standard Packaging

Case Type	REEL PACK	
	REEL ( pcs )	Reel Size (inch)
DO-214AC (SMA)	5,000	13