

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Wurth Electronics Inc 760802113

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>



A Dimensions: [mm]

B Recommended hole pattern: [mm]



Value

375

0.8

4.0

470

390

195-265

65:6

100-150

1500

I_R

I_{sat}

R_{DC1}

R_{DC2}

Ui

n

Po

UT

Unit

μH

А

А

mΩ

mΩ

V (AC)

W

V (AC)

Tol.

±10%

max.


typ.

max


max.

±3%










Scale - 1:1,5

C Schematic:



E General information:

D Electrical Properties:

Properties

Inductance

Rated current

Saturation current

DC Resistance 1

DC Resistance 2

Input voltage

Turns ratio

Output power 1

Insulation test voltage

- It is recommended that the temperature of the part does not exceed 125°C un-
- der worst case operating conditions.
- •Ambient temperature: -40° C to $+85^{\circ}$ C (refering to I_R) •Operating temperature: -40° C to $+125^{\circ}$ C

Test conditions

100 kHz/ 100 mV

 $\Delta T = 40 \text{ K}$

 $|\Delta L/L| < 20\%$

- •Storage temperature (in tray packaging): -20°C to +40°C; 75% RH max. •Test conditions of Electrical Properties: 20°C, 33% RH if not specified differently

Scal	le	-	1	;	1	,5
Juai	ic.		1	•	ľ	,0

Reference on drawing	Description		
•	Start of winding		
Marking	760802113 (Article Number)		
Date code	YYWW		
Revision	00		

				Projection		DESCRIPTION		
1.7	2014-09-16	SSt	MiBr					
1.6	2014-03-31	SSt	SSt			WE-PFC PFC Choke		
1.5	2013-04-29	SSt	SSt	Würth Elektronik eiSos GmbH & Co. KG				
1.4	2013-02-12	SSt	MiBr	EMC & Inductive Solutions Max-Eyth-Str. 1				
1.3	2012-12-10	SSt	SSt	Max-Eytit-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com		Order No.	COMPLIANT	SIZE
1.2	2012-10-29	SSt	MiBr			700000110	ROHS&REACh	ULL
1.1	2012-06-28	SSt	SSt			760802113		A4
REV	DATE	BY	CHECKED	CIDD3@WC UNINC.COM		Size: EFD30		


nie equipment only. This product is not authorized for use in equipment where a higher safety standard and ri led for use in areas such as militany, aerospace, aviation, nuclear control, submarine, transportation (automo reformed on every electronic component which is used in electrical circuits that require high safety and relia d or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, transportation signal, disaster prevention, medical, public information network etc... Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before This electronic component has been designed and developed for usage in general electronic of Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended f the design-in stage. In addition, sufficient reliability evaluation checks for safety must be perfor eliability standard is e tive control, train cont bility functions or perf



more than you expect



F1 Typical Inductance vs. Current Characteristics:




				Projection		DESCRIPTION		
1.7	2014-09-16	SSt	MiBr					
1.6	2014-03-31	SSt	SSt			WE-PFC PFC Ch	oke	
1.5	2013-04-29	SSt	SSt	Würth Elektronik eiSos Gmbł	H & Co. KG			
1.4	2013-02-12	SSt	MiBr	EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg				
1.3	2012-12-10	SSt	SSt			Order No.	COMPLIANT	SIZE
1.2	2012-10-29	SSt	MiBr	Germany Tel. +49 (0) 79 42 945 - 0		700000110	ROHS&REACH	OLL
1.1	2012-06-28	SSt	SSt	www.we-online.com eiSos@we-online.com		760802113		A4
REV	DATE	BY	CHECKED	Cloudence on Inc.com		Size: EFD30		



H Soldering Specifications:



H4: Classification Wave Soldering Profile:

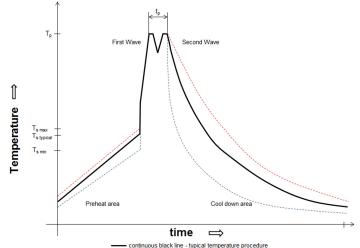

continuous black line - typical temperature procedure
 interrupted blue line - min temperature procedure
 interrupted red line - max temperature procedure

H5: Classification Wave Profile

Profile Feature	Pb-Free Assembly	Sn-Pb Assembly
Preheat		
- Temperature Min (T _{smin})	100°C	100°C
- Temperature Typical (T _{stypical})	120°C	120°C
- Temperature Max (T _{smax})	130°C	130°C
- Time (t _s) from (T _{smin} to T _{smax})	70 seconds	70 seconds
Δ preheat to max Temperature	150°C max.	150°C max.
Peak temperature (Tp)	250°C - 260°C	235°C - 260°C
Time of actual peak temperature (tp)	max. 10 seconds	max. 10 seconds
	max. 5 second each wave	max. 5 second each wave
Ramp-down rate		
- Min	~ 2 K/s	~ 2 K/s
- Typical	~ 3.5 K/s	~ 3.5 K/s
- Max	~ 5 K/s	~ 5 K/s
Time 25°C to 25°C	4 minutes	4 minutes

refer to EN 61760-1:2006

				Projection		DESCRIPTION		
1.7	2014-09-16	SSt	MiBr					
1.6	2014-03-31	SSt	SSt			WE-PFC PFC Che	oke	
1.5	2013-04-29	SSt	SSt	Würth Elektronik eiSos Gmb	H & Co. KG			
1.4	2013-02-12	SSt	MiBr	EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg				
1.3	2012-12-10	SSt	SSt			Order No.	COMPLIANT	SIZE
1.2	2012-10-29	SSt	MiBr	Germany Tel. +49 (0) 79 42 945 - 0			ROHS&REACH	OILL
1.1	2012-06-28	SSt	SSt	www.we-online.com eiSos@we-online.com		760802113		A4
REV	DATE	BY	CHECKED	CIGUS/GIWE-UNITE.CUTT		Size: EFD30		

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a lailure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Winn Elektronic eSts for AG to St product are not intended for use in meas such as millitary anotypace, addition, function transportation signal, disaster prevention, medical, public information network etc... Winn Elektronic eSts Genetin & Co. Winn Elektronic eSts Electronic equipment of the intent of such usage totors the design in stage. In addition, staffort effective or performance.

I Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-PFC of Würth Elektronik eiSos GmbH & Co. KG:

General:

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The usage and operation of the product within ambient conditions, which probably alloy or harm the wire isolation, has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. The product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endangered to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.

Cleaning agents that are used to clean the customer application might damage or change the characteristics of the component, body, pins or termination.

Direct mechanical impact to the product shall be prevented as the ferrite material of the core could flake or in the worst case it could break.

Product specific:

Follow all instructions mentioned in the data sheet, especially:

 The soldering profile has to be complied with according to the technical wave soldering specification, otherwise this will void the warranty.

All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be
ensured.

Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
 Out to home unight of the component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specifications might have the effect to demonstrate component strang forces and high specificatin strang forces and high specifications might have to demonstrat

•Due to heavy weight of the component, strong forces and high accelerations might have the effect to damage the electrical connection or to harm the circuit board and will void the warranty.

The general and product specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness.



This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially equired or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such usage the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.



WÜRTH ELEKTRONII

J Important Notes:

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibi-lity for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications

In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger thrman life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a stan-dard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered.

The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG.

Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

				Projection .		DESCRIPTION				
1.7	2014-09-16	SSt	MiBr	-E-1-@-						
1.6	2014-03-31	SSt	SSt	$\Box \Psi$		WE-PFC PFC Choke				
1.5	2013-04-29	SSt	SSt	Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg		7				
1.4	2013-02-12	SSt	MiBr							
1.3	2012-12-10	SSt	SSt			Order No.	COMPLIANT	SIZE		
1.2	2012-10-29	SSt	MiBr	Germany Tel. +49 (0) 79 42 945 - 0		700000110	ROHS&REACH	ULL		
1.1	2012-06-28	SSt	SSt	www.we-online.com eiSos@we-online.com		760802113		A4		
REV	DATE	BY	CHECKED	CIODS SINC GITTINE.COTT		Size: EFD30				

er safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, transportation (automotive control, transportation), transportation signal, disaster prevention, medical, public information network etc... Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before ive high safety and reliability functions or performance. lectronic equipment only. This product is not authorized for use in equipment where a high intended for use in areas such as military, aerospace, aviation, nuclear control, submarine st be performed on every electronic component which is used in electrical circuits that req nent has been designed and developed for usage in general electronic e onik elSos GmbH & Co KG products are neither designed nor intended f addition, sufficient reliability evaluation checks for safety must be perfo in stage. In addition, sufficien