

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[730-10079-00500](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

UNIT:mm

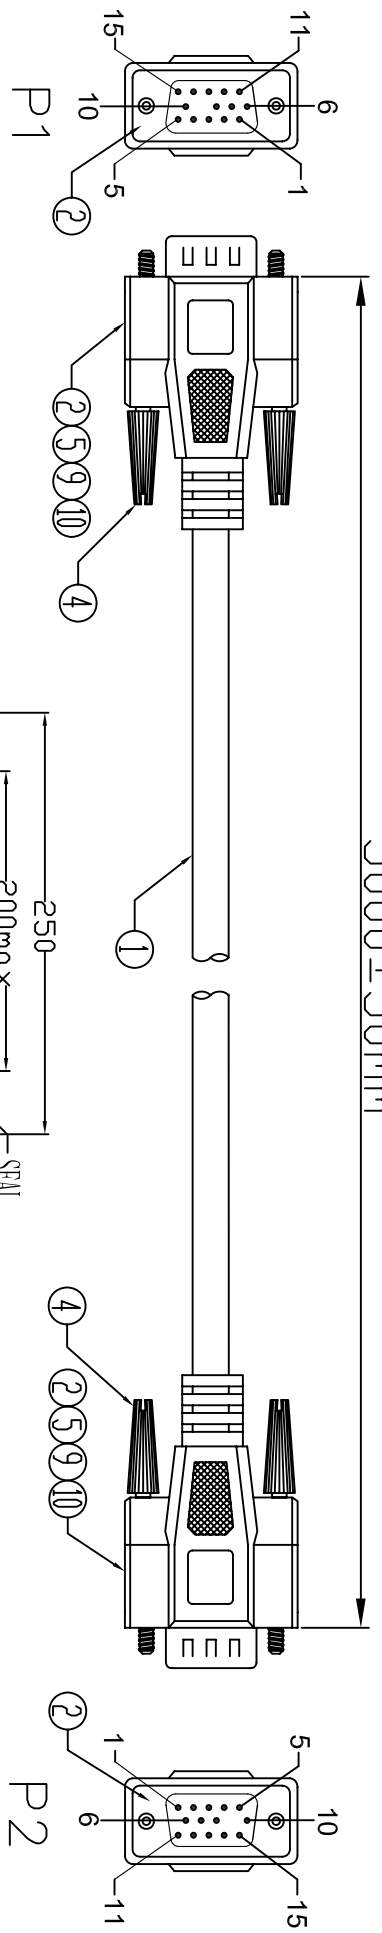


Electronic Test:
 1. 100% Test,(Open,Short,Miss Wire)
 2. Contact Resistance:3 ohm max.
 3. Insulation Resistance:5M ohm min.
 4. Hi-Pot:300V DC/10ms

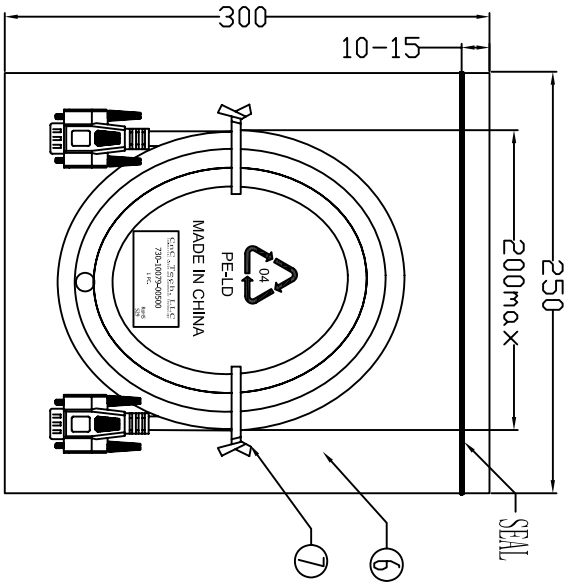

1PCS/PE BAG

PIN ASSIGNMENT



NO.	NAME	Q'TY	SPECIFICATION
①	CABLE	1	UL2919 28AWG(7/0.127 TO)*300AX(75 OHMS)+28AWG(7/0.127 TO)*40+AL/MY+D-W(7/0.16 TO)+BR(60%)+OUTER JACKET COROL:BEIGE(V-29) OD:8.0±0.15mm. L=5000±20mm.
②	CONN	2	HDD 15P MALE PIN G/F-SHELL-NICKEL-INSULATION COLOR:BLUE-MISSING 9PIN. SOLDER TYPE.
③	IN JACKET	8g	CLEAR LDPE(MOULD NO:NM-049)
④	SCREW	4	BEIGE(V-29) 40P PVC(MOULD NO:WM-113)
⑤	COOPER FOIL	2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL 18U" W25mm*1.55mm
⑥	PE BAG	1	CLEAR SIZE:250*300*0.05mm PRINT BLACK(MADE IN CHINA* 及印生产周期,有透气孔.
⑦	TIE	2	WHITE L=200mm
⑧	PE BAG	1/5	CLEAR SIZE:360*380*0.05mm PRINT BLACK(MADE IN CHINA*+5PCS* 及印生产周期,有透气孔.
⑨	TUBE	88mm	HEAT SHRINK TUBE BLACK OD:3.0mm L=8mm*6
⑩	TUBE	48mm	HEAT SHRINK TUBE BLACK OD:3.0mm L=8mm*6

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	730-10079-00500
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	