

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Vishay Semiconductor/Diodes Division](#)
[SD4000C40R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

International IOR Rectifier

SD4000C..R SERIES

STANDARD RECOVERY DIODES

Hockey Puk Version


Features

- Wide current range
- High voltage ratings up to 4000V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style B-44 (R-PUK)

Typical Applications

- Converters
- Power supplies
- High power drives
- Auxiliary system supplies for traction applications

4450A

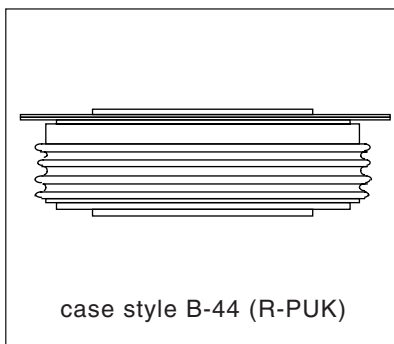

Major Ratings and Characteristics

Parameters	SD4000C..R	Units
$I_{F(AV)}$	4450	A
@ T_{hs}	55	°C
$I_{F(RMS)}$	7700	A
@ T_{hs}	25	°C
I_{FSM}	@ 50Hz 57300	A
	@ 60Hz 60000	A
I^2t	@ 50Hz 16430	KA ² s
	@ 60Hz 15000	KA ² s
V_{RRM} range	3000 to 4000	V
T_J	- 40 to 150	°C

SD4000C..R Series

Bulletin I2033 rev.B 04/00

International
IR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V _{RRM} , maximum repetitive peak reverse voltage V	V _{RSM} , maximum non-repetitive peak rev. voltage V	I _{RRM} max. @ T _J = 150°C mA
SD4000C..R	30	3000	3100	100
	34	3400	3500	
	38	3800	3900	
	40	4000	4100	

Forward Conduction

Parameter	SD4000C..R	Units	Conditions
I _{F(AV)} Max. average forward current @ Heatsink temperature	4450 (2200)	A	180° conduction, half sine wave
	55 (85)	°C	Double side (single side) cooled
I _{F(RMS)} Max. RMS forward current	7700	A	@ 25°C heatsink temperature double side cooled
I _{FSM} Max. peak, one-cycle forward, non-repetitive surge current	57300	A	t = 10ms No voltage
	60000		t = 8.3ms reapplied
	48200		t = 10ms 100% V _{RRM}
	50470		t = 8.3ms reapplied
I ² t Maximum I ² t for fusing	16430	KA ² s	t = 10ms No voltage
	15000		t = 8.3ms reapplied
	11615		t = 10ms 100% V _{RRM}
	10605		t = 8.3ms reapplied
I ² /t Maximum I ² /t for fusing	164300	KA ² /s	t = 0.1 to 10ms, no voltage reapplied
V _{F(TO)1} Low level value of threshold voltage	0.830	V	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , T _J = T _J max.
V _{F(TO)2} High level value of threshold voltage	1.112		(I > π × I _{F(AV)}), T _J = T _J max.
r _{f1} Low level value of forward slope resistance	0.101	mΩ	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , T _J = T _J max.
r _{f2} High level value of forward slope resistance	0.071		(I > π × I _{F(AV)}), T _J = T _J max.
V _{FM} Max. forward voltage drop	1.44	V	I _{pk} = 6000A, T _J = T _J max, t _p = 10ms sinusoidal wave

Thermal and Mechanical Specifications

Parameter	SD4000C..R	Units	Conditions
T _J Max. junction operating temperature range	-40 to 150	°C	
T _{stg} Max. storage temperature range	-55 to 200		
R _{thJ-hs} Max. thermal resistance, junction to heatsink	0.02 0.01	K/W	DC operation single side cooled DC operation double side cooled
F Mounting force, ± 10%	39200 (4000)	N (Kg)	
wt Approximate weight	1590	g	
Case style	B-44 (R-PUK)		See Outline Table

ΔR_{thJ-hs} Conduction

(The following table shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.0009	0.0010	0.0006	0.0006	K/W	T _J = T _J max.
120°	0.0010	0.0011	0.0010	0.0010		
90°	0.0013	0.0013	0.0014	0.0014		
60°	0.0019	0.0019	0.0020	0.0020		
30°	0.0033	0.0033	0.0034	0.0034		

Ordering Information Table

Device Code	SD	400	0	C	40	R
	①	②	③	④	⑤	⑥
1	- Diode					
2	- Essential part number					
3	- 0 = Standard recovery					
4	- C = Ceramic Puk					
5	- Voltage code: code x 100 = V _{RRM} (see Voltage Ratings Table)					
6	- R = Puk Case B-44 (R-PUK)					

SD4000C..R Series

Bulletin I2033 rev. B 04/00

International
IOR Rectifier

Outline Table

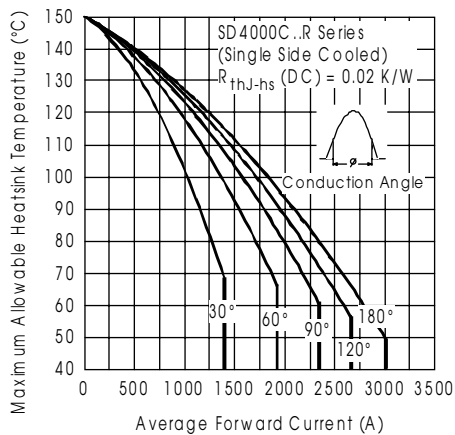
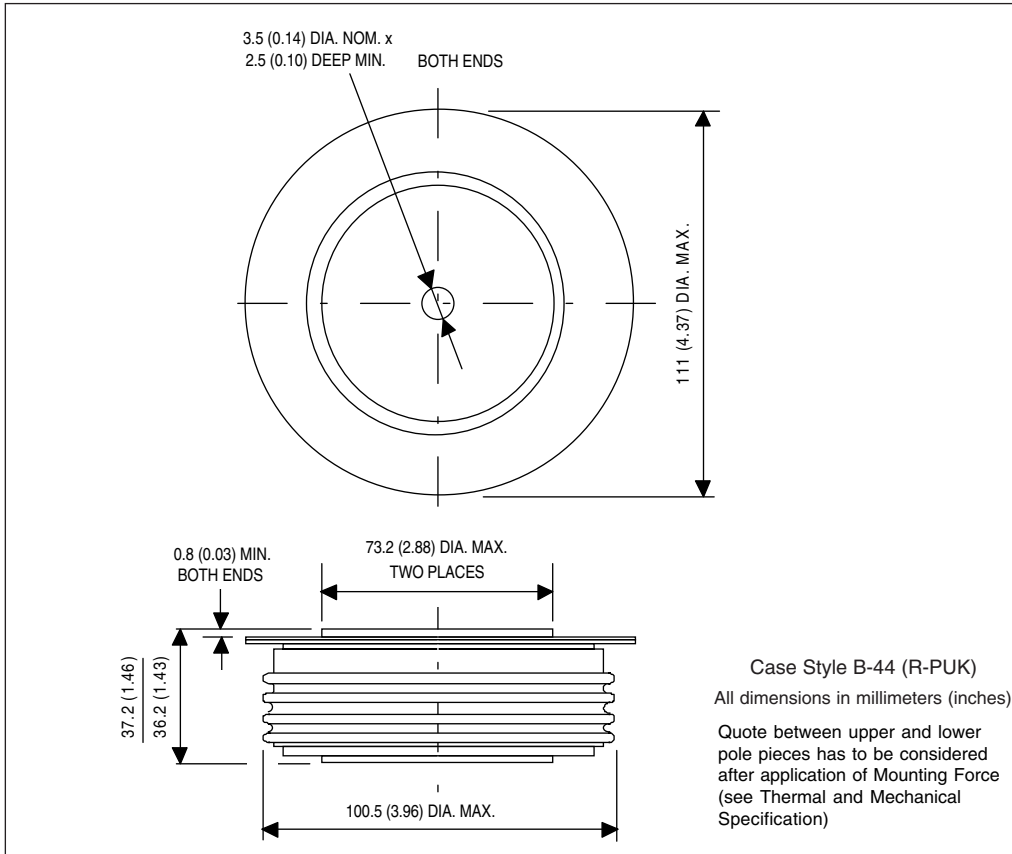


Fig. 1 - Current Ratings Characteristics

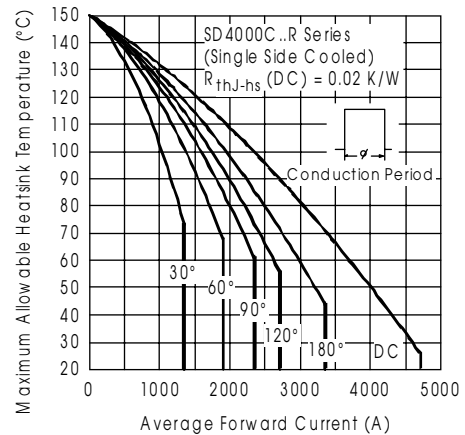


Fig. 2 - Current Ratings Characteristics

International
IRF Rectifier

SD4000C..R Series

Bulletin I2033 rev. B 04/00

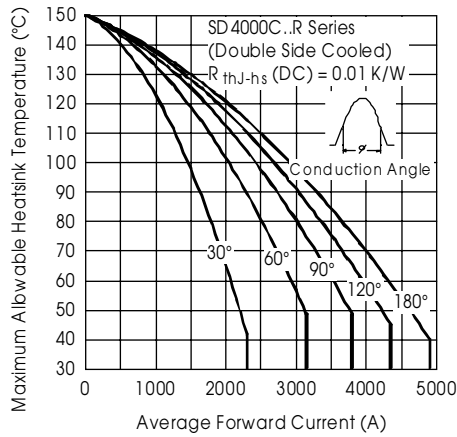


Fig. 3 - Current Ratings Characteristics

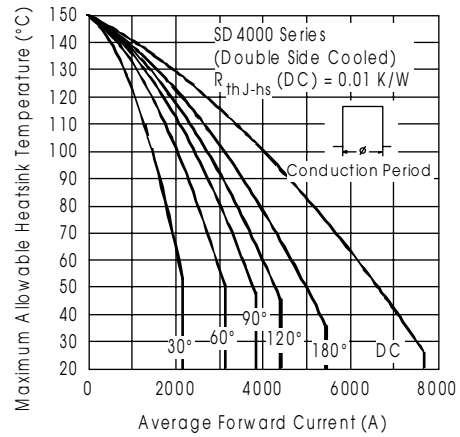


Fig. 4 - Current Ratings Characteristics

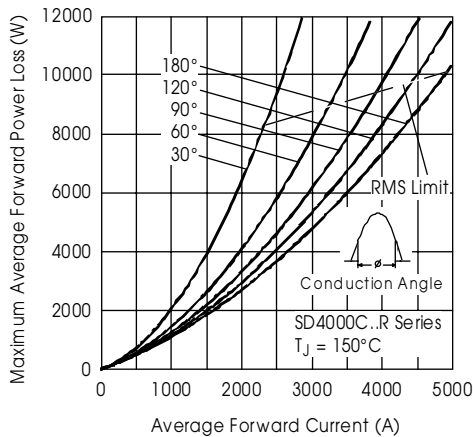


Fig. 5 - Forward Power Loss Characteristics

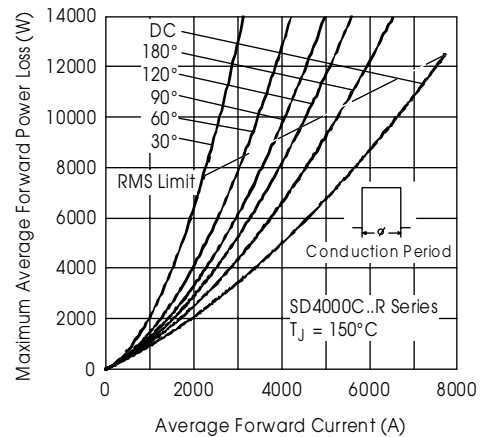


Fig. 6 - Forward Power Loss Characteristics

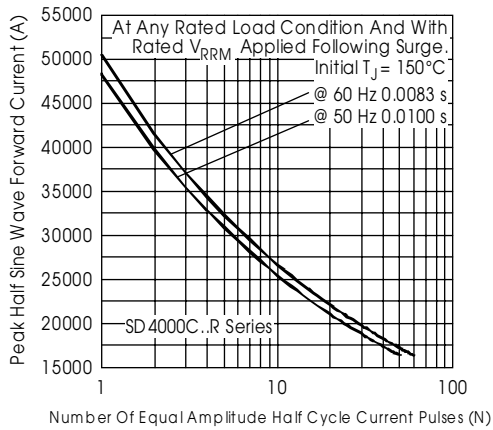


Fig. 7 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

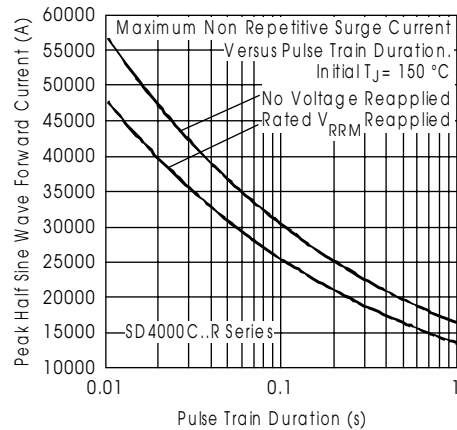


Fig. 8 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

SD4000C..R Series

Bulletin I2033 rev. B 04/00

International
IRF Rectifier

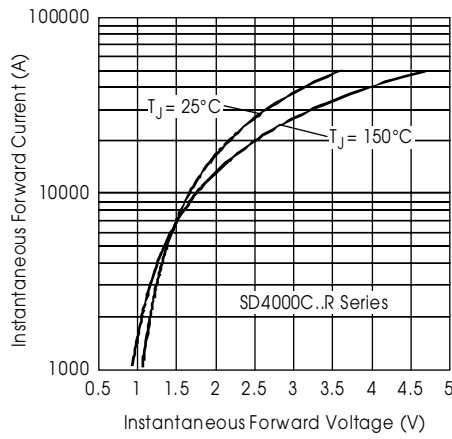


Fig. 9 - Forward Voltage Drop Characteristics

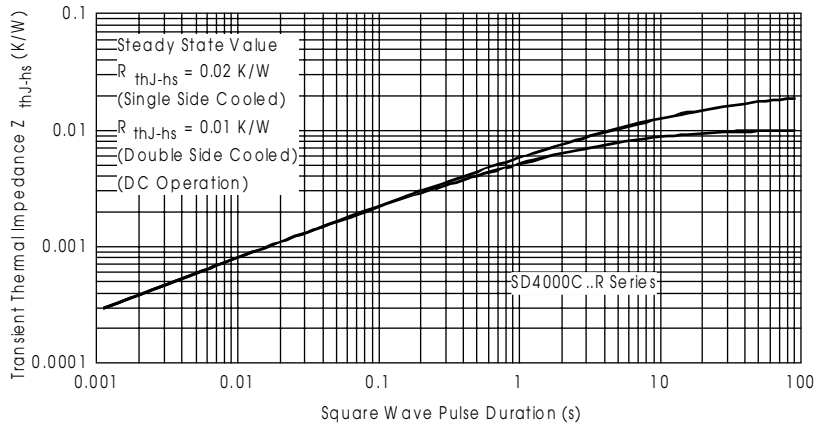


Fig. 10 - Thermal Impedance Z_{thJ-hs} Characteristics