

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Hirose Electric Co Ltd](#)  
[HIF5-34D-2.54R](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Card Edge Type Ribbon Cable Connector

## HIF5 Series

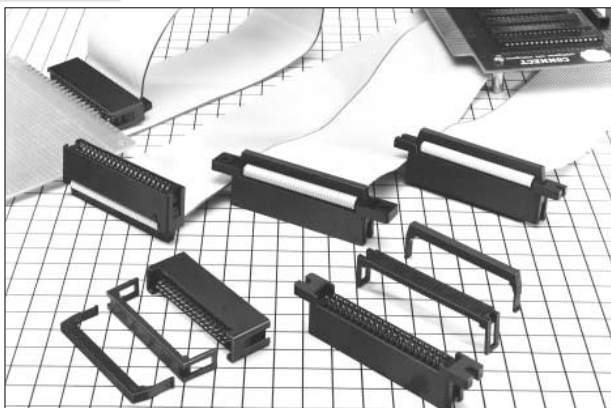

### ■ Features

#### 1. Product Variation

The area to install the connector body is classified into three types according to full hole mounting area, semi-mounting area and non-mounting area.

#### 2. Mounting Density Enhancement

This connector is designed so that the ribbon cable can turn back within the connector molding range. The connector can be installed without coming out of the insulator.

#### 3. Applicable Cable

The applicable cable is a <UL2651>AWG#28 flat cable (7 pcs./0.127mm, jacket dia.: 0.8~1.0mm).

### ■ Applications

Computers, FDD, various kinds of electronic equipment.

### ■ Product Specifications

Rating	Current rating: 1A Voltage rating: 200V AC	Operating Temperature Range: -55 to +85°C (Note 1) Operating Moisture Range: 40 to 80%	Storage Temperature Range: -10 to +60°C (Note 2) Storage Humidity Range: 40 to 70% (Note 2)
--------	---	---	--

Item	Specification	Condition
1. Insulation Resistance	1000M ohms min.	500V DC
2. Withstanding voltage	No flashover or insulation breakdown.	650V AC/1 minute
3. Contact Resistance	15m ohms max.	0.1A
4. Vibration	No electrical discontinuity of 1μs or more	Frequency: 10 to 55 Hz, single amplitude of 0.75 mm, 2 hours in each of the 3 directions.
5. Humidity (Steady state)	Insulation resistance: 1000M ohms min.	96 hours at temperature of 40°C and humidity of 90% to 95%
6. Temperature Cycle	No damage, cracks, or parts looseness.	(-55°C: 30 minutes → 15 to 35°C: 5 minutes max. 125°C: 30 minutes → 15 to 35°C: 5 minutes max.) 5 cycles
7. Operating Life	Contact resistance 15m ohms max.	500 cycles
8. Resistance to Soldering heat	No deformation of components affecting performance.	Flow: 260°C for 10 seconds Manual soldering: 300°C for 3 seconds

Note 1: Includes temperature rise caused by current flow.

Note 2: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers non conducting condition of installed connectors in storage, shipment or during transportation.

### ■ Material


Part	Material	Finish		Remarks
Insulator	PBT	Black		UL94V-0
Structure of	Copper alloy	Contact area	gold plating	_____
		Connection area	solder plating	

### ■ Ordering Information

**HIF5**   **B** - \*   **D**   **A** - **2.54**   **R**  
 ①   ②   ③   ④   ⑤   ⑥   ⑦


① Series Name: HIF 5	④ Contact alignment: D : Double
② Mold type B: With full mounting hole C: With half mounting hole D: Without mounting hole	⑤ Plating type: A : Selective gold plating
③ Number of contacts: 20, 26, 34, 40, 50, 60	⑥ Contact Pitch: 2.54mm
	⑦ Connection type: R : Ribbon cable

■ **With Mounting Full Hole**

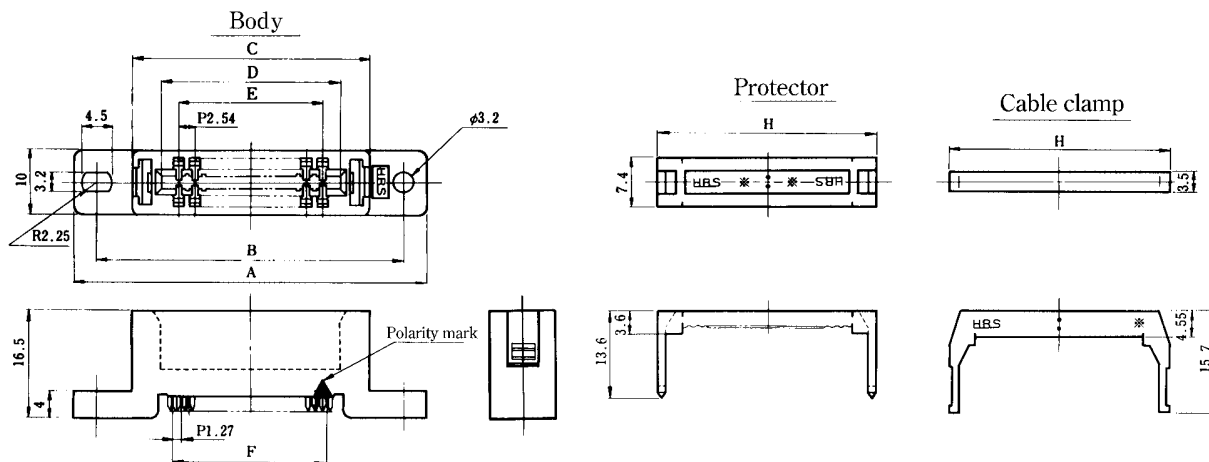


Part Number	CL No.	Number of Contacts	A	B	C	D	E	F	H
HIF5B-20DA-2.54R	564-0014-5	20	56	48.26	36.04	28.04	22.86	24.13	33.54
HIF5B-26DA-2.54R	564-0015-8	26	63.62	55.88	43.66	35.66	30.48	31.75	41.16
HIF5B-34DA-2.54R	564-0016-0	34	73.78	66.04	53.82	45.82	40.64	41.91	51.32
HIF5B-40DA-2.54R	564-0017-3	40	81.4	73.66	61.44	53.44	48.26	49.53	58.94
HIF5B-50DA-2.54R	564-0018-6	50	94.1	86.36	74.14	66.14	60.96	62.23	71.64
HIF5B-60DA-2.54R	564-0019-9	60	106.8	99.06	86.84	78.84	73.66	74.93	84.34

■ **With Mounting Half hole**

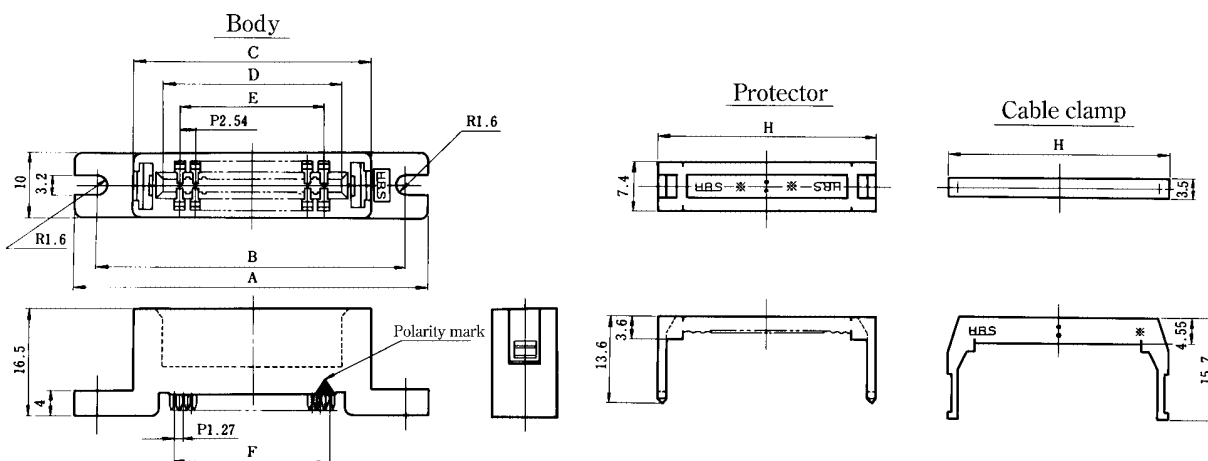


Part Number	CL No.	Number of Contacts	A	B	C	D	E	F	H
HIF5C-20DA-2.54R	564-0020-8	20	50.8	45.72	36.04	28.04	22.86	24.13	33.54
HIF5C-26DA-2.54R	564-0021-0	26	58.42	53.34	43.66	35.66	30.48	31.75	41.16
HIF5C-34DA-2.54R	564-0022-3	34	68.58	63.5	53.82	45.82	40.64	41.91	51.32
HIF5C-40DA-2.54R	564-0023-6	40	76.2	71.12	61.44	53.44	48.26	49.53	58.94
HIF5C-50DA-2.54R	564-0024-9	50	88.9	83.82	74.14	66.14	60.96	62.23	71.64
HIF5C-60DA-2.54R	564-0025-1	60	101.6	96.52	86.84	78.84	73.66	74.93	84.34

## ■ Without Mounting Hole

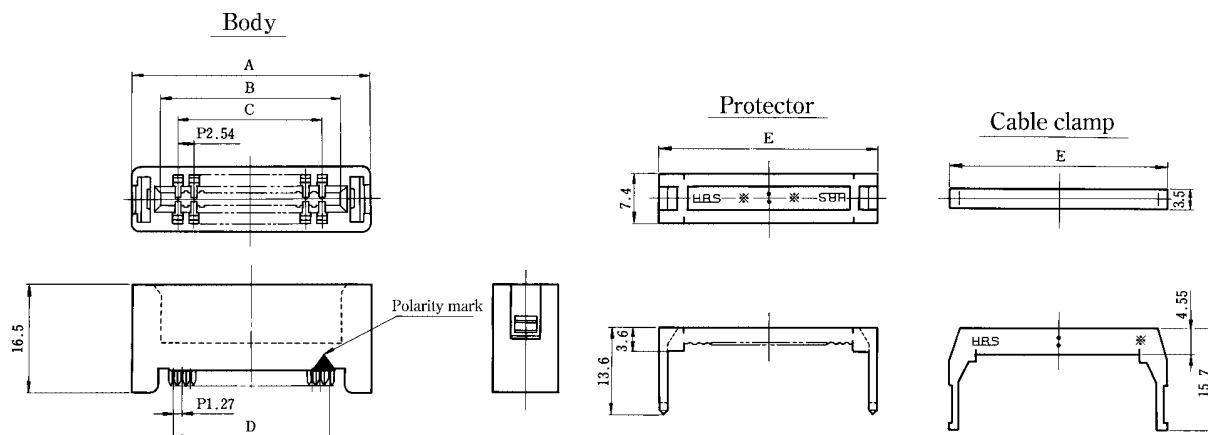

Part Number	CL No.	Number of Contacts	A	B	C	D	E
HIF5D-20DA-2.54R	564-0026-4	20	36.04	28.04	22.86	24.13	33.54
HIF5D-26DA-2.54R	564-0027-7	26	43.66	35.66	30.48	31.75	41.16
HIF5D-34DA-2.54R	564-0028-0	34	53.82	45.82	40.64	41.91	51.32
HIF5D-40DA-2.54R	564-0029-2	40	61.44	53.44	48.26	49.53	58.94
HIF5D-50DA-2.54R	564-0030-1	50	74.14	66.14	60.96	62.23	71.64
HIF5D-60DA-2.54R	564-0031-4	60	86.84	78.84	73.66	74.93	84.34


◆PCB mounting pattern

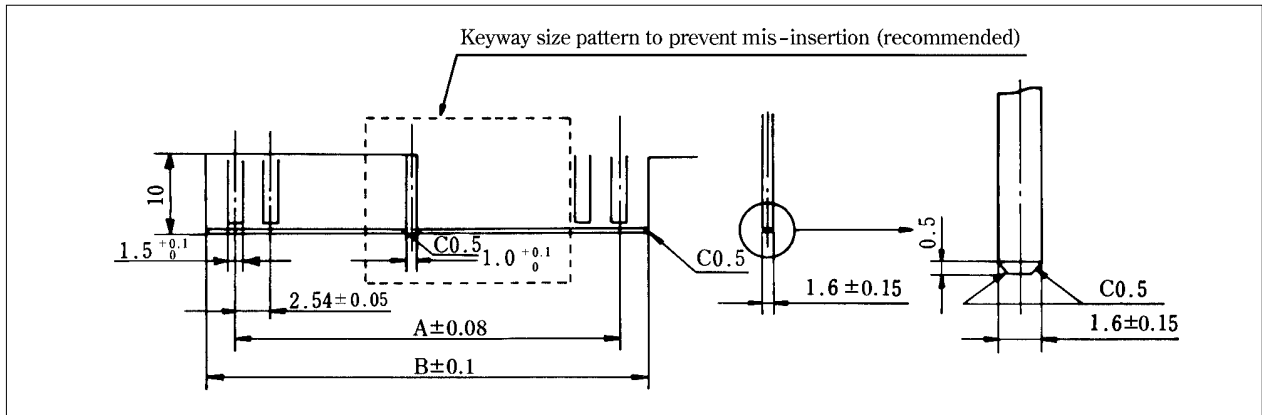

Number of Contacts	20	26	34	40	50	60
A	22.86	30.48	40.64	48.26	60.96	73.66
B	27.84	35.46	45.62	53.24	65.94	78.64


Note. Using the polarizing key prevents mis-insertion in the printed board.  
 For use, insert the polarizing key so as to hit the mold bottom.

◆Polarizing Key

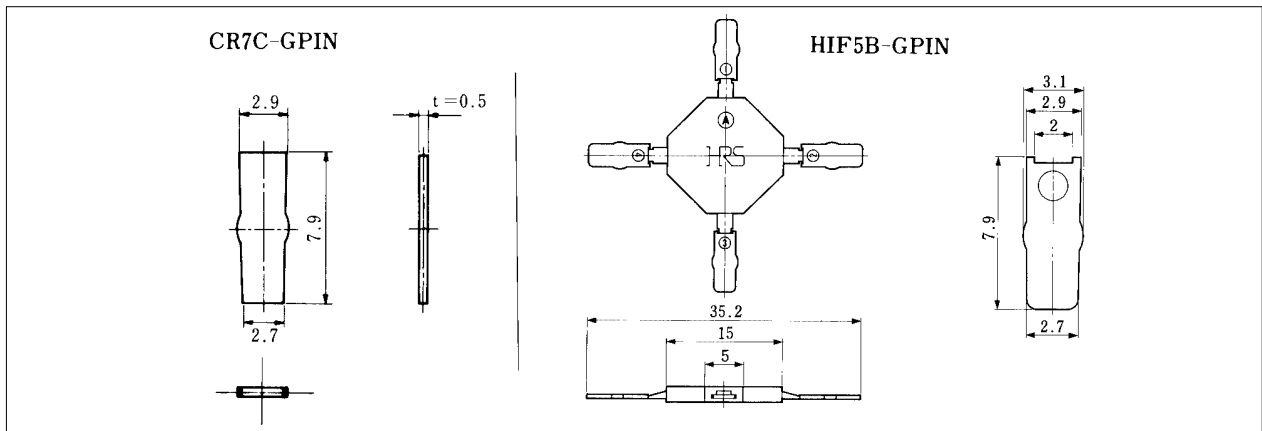

Part Number	CL No.	Material
CR7C-GPIN	507-0055-8	Poly acetal resin, white
HIF5B-GPIN	564-0052-4	PBT, beige

◆Panel Cutouts

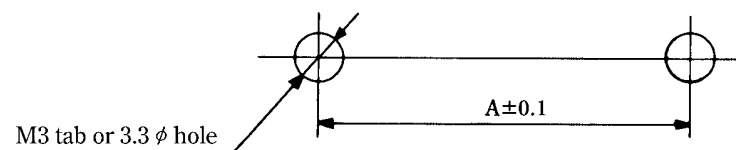

Unit: mm


	Number of Contacts	20	26	34	40	50	60
mounting Half hole	size A	45.72	53.34	63.50	71.12	83.82	96.52
mounting Full hole	size A	48.26	55.88	66.04	73.66	86.36	99.06

**◆ Connection Procedures**

Note 1. Cable length tolerance Less than 500  $\pm 10$  (mm)  
More than 500 pcs.  $\pm 3$  %

Note 2. When a cable such as a twist cable or a slit (like a roller screen) cable is used, the cable pitch will slightly change according to cable manufacturers. If connection failure has occurred, consult HRS Sales Department.


HIF5B Type

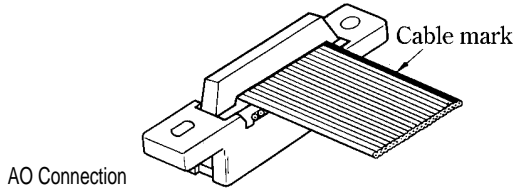

AO Connection


HIF5B Type

(No cable clamp)

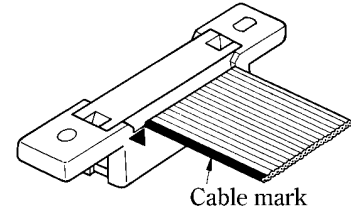

AO Connection


HIF5B Type

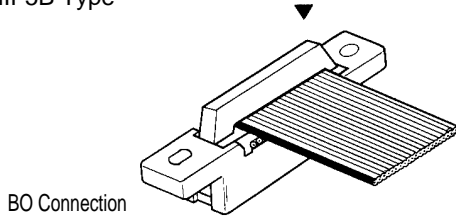

BO Connection


HIF5B Type

(No cable clamp)

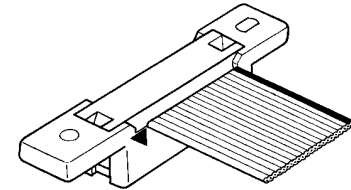

BO Connection


HIF5B Type

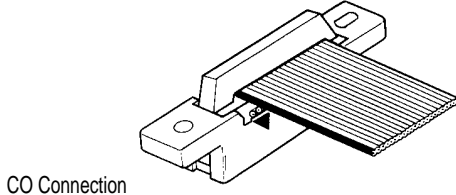

CO Connection


HIF5B Type

(No cable clamp)

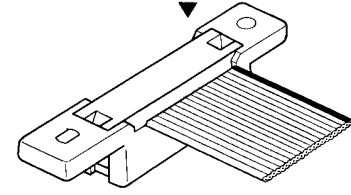

CO Connection


HIF5B Type

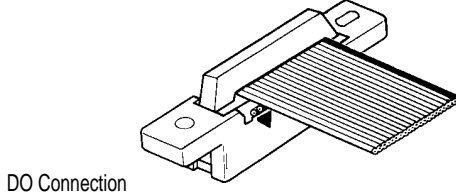

DO Connection


HIF5B Type

(No cable clamp)

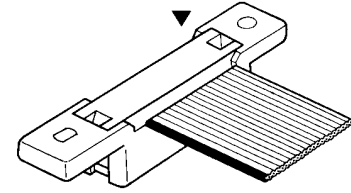

DO Connection


HIF5C Type

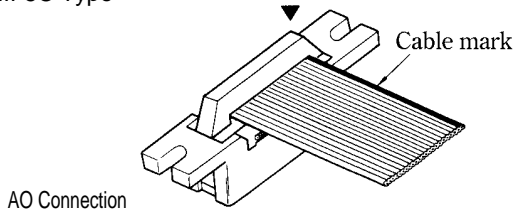

AO Connection


HIF5C Type

(No cable clamp)

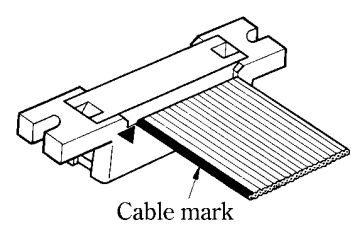

AO Connection


HIF5C Type

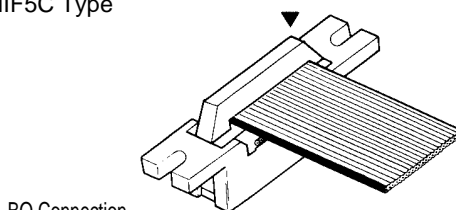

BO Connection

HIF5C Type


(No cable clamp)

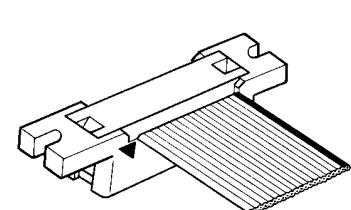

BO Connection

HIF5C Type


CO Connection



HIF5C Type


(No cable clamp)

CO Connection



HIF5C Type


DO Connection



HIF5C Type


(No cable clamp)

DO Connection



HIF5D Type


AO Connection



HIF5D Type


(No cable clamp)

AO Connection



HIF5D Type


BO Connection



HIF5D Type


(No cable clamp)

BO Connection



HIF5D Type


CO Connection



HIF5D Type


(No cable clamp)

CO Connection



HIF5D Type

DO Connection



HIF5D Type

(No cable clamp)

DO Connection

