

## Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)  
[TOBNC10-58](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

RoHS COMPLIANT

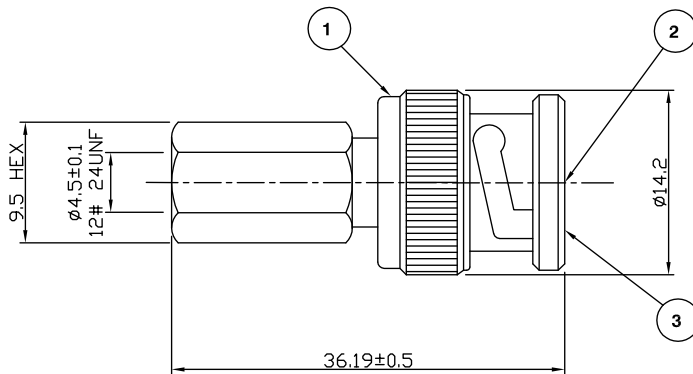

For stripping and assembly instructions see Drawing Number: VAIB1301

**Electrical Characteristics**

Nominal Impedance: 50 ohms  
 Frequency Range: DC to 4 GHz  
 VSWR: 1.3:1 maximum

**Mechanical Characteristics**

Mating Cycles: 500 cycles minimum  
 Interface Dimensions: Conform to MIL-C-39012

**Environmental Characteristics**

Temperature Range: -55 °C to +85 °C

PART	DESCRIPTION
1	Body Brass, nickel plated 1.78 $\mu$ m
2	Contact Phosphor Bronze, gold plated 0.076 $\mu$ m - 0.127 $\mu$ m
3	Dielectric POM

Address & RoHS Update	JT	2	25 Mar 10
First Issue	SN	1	26 Sep 02
DESCRIPTION OF REVISION	APPVD	ISS	DATE



**Cinch Connectivity Solutions**  
 7-13 Russel Way,  
 Wldford Industrial Estate,  
 Chelmsford, Essex,  
 CM1 3AA, UK.  
 Tel: +44 (0) 1245 359515  
 Fax: +44 (0) 1245 358938

SCALE: Not To Scale  
 DIMENSIONS: mm  
 TOLERANCES:  
 $\pm 0.2$ mm unless  
 otherwise stated

DRAWN BY: S Nash  
 CHECKED BY: P Couzens  
 APPROVED BY: P Couzens  
 DATE: 26 Sep 02

TITLE:  
 Twist-On BNC Plug for  
 RG58

PART NUMBER:  
**TOBNC10-58**

PAGE: 1 of 1