

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)  
[HSTTT04-48-Q](#)


For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	Min. Exp. I.D In. (mm)	Max. Rec. ID In. (mm)	NOMINAL REC WALL THICKNESS In. (mm)
HSTTT03-48-0	.034 (0.9)	.015 (1.4)	.009±.002 (0.2±.05)
HSTTT04-48-0	.038 (1.0)	.018 (0.5)	.009±.002 (0.2±.05)
HSTTT046-48-0	.046 (1.2)	.022 (0.5)	.010±.002 (0.3±.05)
HSTTT05-48-0	.050 (1.3)	.027 (0.7)	.010±.002 (0.3±.05)
HSTTT055-48-0	.055 (1.4)	.032 (0.8)	.012±.003 (0.3±.08)
HSTTT06-48-0	.060 (1.5)	.039 (1.0)	.012±.003 (0.3±.08)
HSTTT08-48-0	.076 (1.9)	.049 (1.2)	.012±.003 (0.3±.08)
HSTTT09-48-0	.093 (2.3)	.061 (1.6)	.012±.003 (0.3±.08)
HSTTT12-48-0	.120 (3.0)	.072 (1.8)	.012±.003 (0.3±.08)
HSTTT15-48-0	.150 (3.8)	.089 (2.3)	.012±.003 (0.3±.08)
HSTTT19-48-0	.191 (4.9)	.112 (2.8)	.012±.003 (0.3±.08)
HSTTT24-48-0	.240 (6.0)	.141 (3.6)	.015±.004 (0.4±0.1)
HSTTT30-48-0	.302 (7.7)	.178 (4.5)	.015±.004 (0.4±0.1)
HSTTT37-48-0	.370 (9.4)	.224 (5.7)	.015±.004 (0.4±0.1)
HSTTT43-48-0	.430 (10.9)	.278 (7.0)	.015±.004 (0.4±0.1)
HSTTT47-48-0	.470 (11.9)	.347 (8.8)	.015±.004 (0.4±0.1)
HSTTT56-48-5*	.560 (14.2)	.399 (10.1)	.015±.003 (0.4±0.1)
HSTTT66-48-0*	.655 (16.6)	.462 (11.7)	.018±.004 (0.5±0.1)
HSTTT75-48-5*	.750 (19.0)	.524 (13.3)	.018±.004 (0.5±0.1)
HSTTT93-48-5*	.930 (23.6)	.655 (16.6)	.020±.004 (0.5±0.1)
HSTTT112-48-5*	1.125 (28.6)	.786 (20.0)	.025±.005 (0.6±.13)
HSTTT131-48-2*	1.310 (33.3)	.911 (23.1)	.030±.006 (0.8±.15)
HSTTT150-48-2*	1.500 (38.1)	1.036 (26.3)	.030±.006 (0.8±.15)

PANDUIT NUMBERING SYSTEM

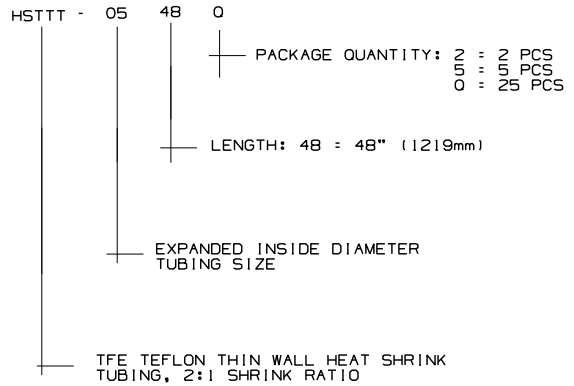

- NOTES:**
- APPROXIMATE SHRINK RATIO: 2:1
  - MATERIAL: POLYTETRAFLUOROETHYLENE
  - COLOR: WHITE TRANSLUCENT
  - TEFLON IS A REGISTERED TRADEMARK OF E.I.DuPont.
  - SHRINK RATIOS ARE APPROXIMATIONS; PLEASE REFER TO DIMENSIONAL TABLE FOR THE EXACT MINIMUM EXPANDED AND MAXIMUM RECOVERED I.D.'S
  - "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. (USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE.)"
  - (\*) EXPANDED ID IS PER MIL-DTL-23053/12 CLASS 2 DIMENSIONAL REQUIREMENTS

DIMENSIONS IN BRACKETS ARE METRIC [ mm ]  
 CAD FILENAME/LAYERS G00239KL\_DC\_HSTTT\_01

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

TFE - TEFLON THIN WALL HEAT SHRINK (HSTTT) (CUSTOMER DRAWING)

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:  
 (.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)  
 (.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY LGRAVITT MAT'L: SCALE NONE  
 DATE 5/13/03 SEE NOTES DRAWING NO. GB0239KL  
 CHK'D VJS DBG SIZE A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
O1	8/24/10	LEF	VJS	B ADDED APPROXIMATE TO NOTES LINE 1 A CHANGE 131 & 150 FROM +/- .005 TO +/- .006	GB0239KL	O1	RAMI	
R	5/13/03	LGG		INITIAL RELEASE	GB0239KL	R		