

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[CJ70C-201](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


RED INDICATES ORIGINAL

DASH NO	CABLES ACCOMMODATED	A HEX	B DIM	C MAX	ASSEMBLE PER
-201	N172178-00002	.344	.030	1.80	TAI-168
-202	TRC-78-1				
-203	TRC-124-1A				
-204	10602, RAYCHEM				
-205	1VAL-78-1P2				
-206	78600130, RAYCHEM				
-207	19310, DELTA				
-208	202-3827, MICRODOT				
-209	202-3842, MICRODOT				
-210	8451, BELDEN				
-211	202-3934, MICRODOT	1.85	TAI-138		
-212	25245114, RAYCHEM				
-213	TRC-78-2				
-214	TRC-124-2				
-215	BL982, TIMES				
-216	BL1242, TIMES				
-217	6C875R24H, GRUMMAN				
-218	6C875R168, RAYCHEM				
-219	10813, RAYCHEM				
-220	6C875R1, GRUMMAN				
-221	10814, RAYCHEM	1.80	TAI-168		
-222	10813, RAYCHEM				
-223	HN2-1149, HIGRES				
-301	6C875R1, GRUMMAN				
-302	6C875R1, GRUMMAN				
-303	782845314, RAYCHEM				
-304					
-305	N17177-00001 (THERMATECS)			TAI-218	
-306	TRC-50-2				
-307	TRC-78-1				
-308	TRC-78-2				
-309	TRC-50-1				

DASH NO	KEYING LETTER	D DEGREES	E DEGREES	F DEGREES	COLOR BAND
-1	T	100°	150°	110°	RED
-2	U	120°	150°	110°	BRANDE
-3	V	115°	150°	115°	YELLOW
-4	W	120°	110°	125°	GREEN
-5	X	130°	100°	130°	BLUE
-6	Y	110°	140°	110°	VIOLET
-7	Z	100°	160°	100°	GRAY
-8	S	125°	125°	90°	WHITE
-9	NONE	120°	120°	120°	NONE


REV	ED	DESCRIPTION	DWN	APPROVED	DATE
U	12815	CHANGED BOM ON -307; SEE ECO	R L		11/28/99

INCH	MM
.005	0.13
.010	0.25
.030	0.76
.344	8.74
.546	13.87
1.00	25.40
1.25	31.75
1.416	35.97
1.55	39.37
1.75	44.45
1.80	45.72

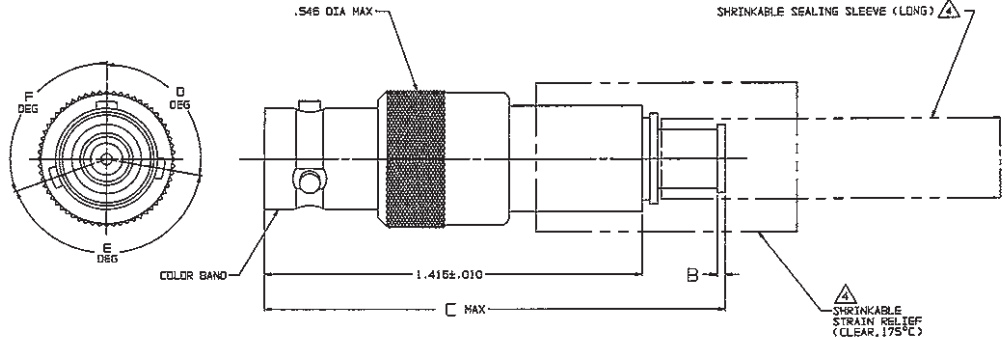

5. FOR TOOL CRIMP CONNECTOR QUALIFIED TO MIL-C-49142, SEE DRAWING 3-0299 (CJ70MC)

5. EXAMPLE OF COMPLETE MODEL NO.



1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:

- a. CABLE GROUPS -201 THROUGH -210, -217 THROUGH -303, -305, -307 & -309
 - ! SHRINKABLE STRAIN RELIEF (1.00 LONG)
 - ! SHRINKABLE SEALING SLEEVE (1.25 LONG)
- b. CABLE GROUPS -211 THROUGH -218, -306 & -308
 - ! SHRINKABLE STRAIN RELIEF (1.75 LONG)

3. 3-LUG CONCENTRIC TWIMAX/TRIAX TR8, FULL CRIMP CABLE RECEPTACLE

2. FINISH: TFS-1A (NICKEL)

1. ALL DIMENSIONS ARE IN INCHES

-202 SHOWN



QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED INCH ± .005 MM ± .00025 ANGLES UNLESS	TROMPETER OF CONNECTIVITY	CJ70C TAYWAK128	
DWN	11/14/99	MATERIAL	CODE IDENT
CHK			14949
ENGR			DRAWING NO.
APPR			3-0209
			REV
			U
NEXT ASSY	SCALE 4/1	DATE 11/11/99	SHEET 1C