

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Central Semiconductor Corp](#)
[CBRHD-01 TR13](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

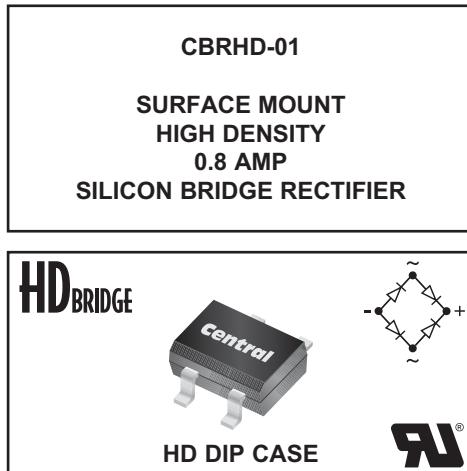

- This series is UL listed: file number E130224



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CBRHD-01 is a silicon full wave bridge rectifier mounted in a durable epoxy surface mount molded case, utilizing glass passivated chips.

MARKING CODE: CBD1

FEATURES:

- Efficient use of board space: requires only 42mm² of board space vs. 120mm² of board space needed for industry standard 1.0 Amp surface mount bridge rectifier.
- 50% higher density (Amps/mm²) than the industry standard 1.0 Amp surface mount bridge rectifier.
- Glass passivated chips for high reliability.

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	100	V
DC Blocking Voltage	V _R	100	V
RMS Reverse Voltage	V _R (RMS)	70	V
Average Forward Current (T _A =40°C) (Note 1)	I _O	0.5	A
Average Forward Current (T _A =40°C) (Note 2)	I _O	0.8	A
Peak Forward Surge Current	I _{FSM}	30	A
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +150	°C
Thermal Resistance (Note 3)	θ _{JA}	85	°C/W


ELECTRICAL CHARACTERISTICS PER DIODE: (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
I _R	V _R = 100V		5.0	μA
I _R	V _R = 100V, T _A =125°C		500	μA
V _F	I _F =400mA		1.0	V
C _J	V _R =4.0V, f=1.0MHz	9.0		pF


Notes: (1) Mounted on Glass-Epoxy PCB.

(2) Mounted on Ceramic PCB.

(3) Mounted on PCB with 0.5" x 0.5" copper pads.

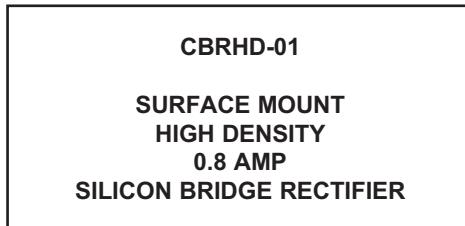

HD DIP CASE - MECHANICAL OUTLINE

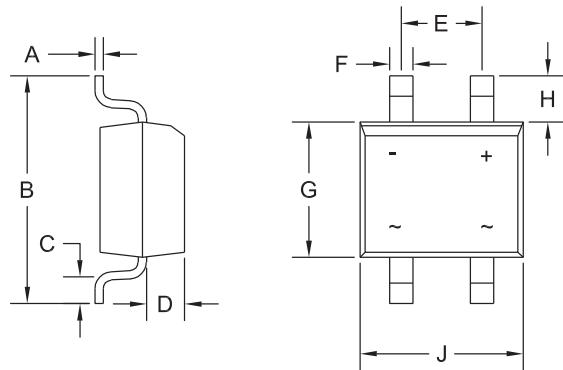

R2

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.006	0.014	0.15	0.35
B	-	0.275	-	7.00
C	0.027	0.043	0.70	1.10
D	0.035	0.051	0.90	1.30
E	0.090	0.106	2.30	2.70
F	0.019	0.031	0.50	0.80
G	0.150	0.165	3.80	4.20
H	0.051	0.067	1.30	1.70
J	0.177	0.193	4.50	4.90
K	0.090	0.106	2.30	2.70
L	0.000	0.008	0.00	0.20

HD DIP (REV: R2)

MARKING CODE: CBD1

R2 (4-January 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES**PRODUCT SUPPORT**

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US**Corporate Headquarters & Customer Support Team**

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centralsemi.com

Worldwide Field Representatives:
www.centralsemi.com/wwreps

Worldwide Distributors:
www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**,
which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms