

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)
[53314-3015](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

ENG. NO.
SD-53314-***15

EDP NO.

1MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

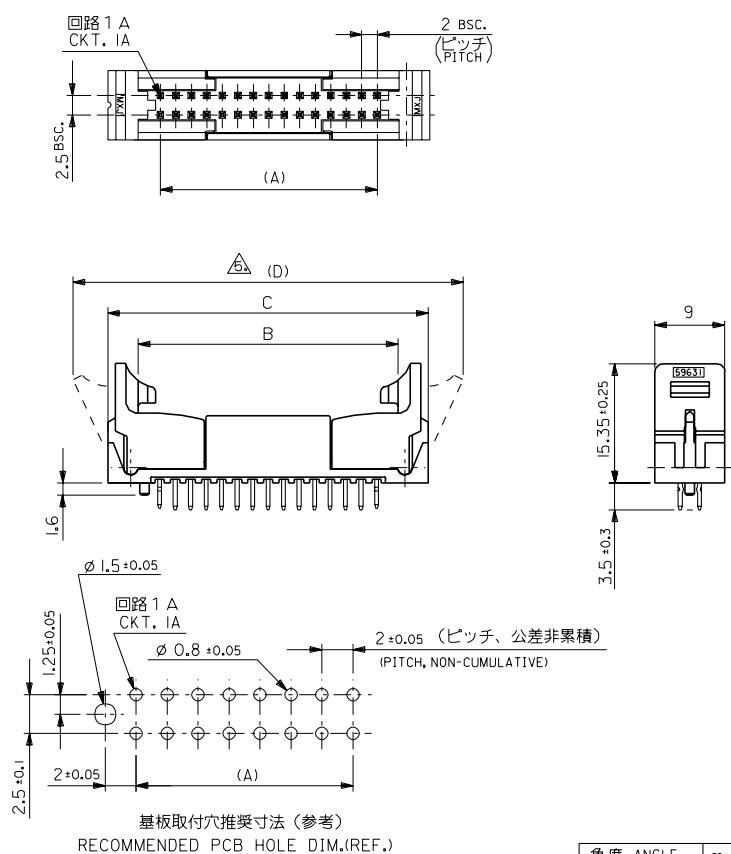

注記
NOTES

- 材料: ハウジング: ガラス入りポリエステル
MATERIALS: HOUSING : G.F. POLYESTER, UL94V-0, GRAY
ピン : 黄銅
PIN : BRASS (0.5mm, SQUARE)
 - 仕上げ : Sn-Pbメッキ
PLATING : TIN-LEAD : 2-3 μm
銅下地メッキ : 2-3 μm
OVER COPPER : 1-2 μm
 - 適合メスマクスター
MATING CONNECTORS : 51089-***5, 52478-***15,
 - 推奨基板厚 :
RECOMMENDED PCB THICKNESS : t = 1.6mm
- ⚠ イジェクターが開いている状態。
EJECTORS IN OPEN POSITION

| | | | | | |
|------|------|------|-----|------------|------|
| 80.4 | 71.4 | 63.6 | 58 | 53314-6015 | 60 |
| 70.4 | 61.4 | 53.6 | 48 | -5015 | 50 |
| 60.4 | 51.4 | 43.6 | 38 | -4015 | 40 |
| 54.4 | 45.4 | 37.6 | 32 | -3415 | 34 |
| 50.4 | 41.4 | 33.6 | 28 | 53314-3015 | 30 |
| (D) | C | B | (A) | ENG. NO. | CKT. |

| | | | | | | |
|-----------------|-------|----|-----------------|-----|------|---------|
| 角度 ANGLE | ±3° | 2 | RELEASED | GMS | 4.1 | 92/2/21 |
| 30以上 OVER | +0.3 | 1 | REVISED | GMS | 4.1 | 91/7/30 |
| 10以上 30未満 UNDER | +0.25 | 0 | PROPOSED | GMS | 4.1 | 91/3/5 |
| 10未満 UNDER | +0.2 | 記号 | 変更内容 | DR. | 日付 | DATE |
| 一般公差 | | 記号 | REVISION RECORD | DR. | CHK. | DATE |

| | |
|-------------------|----------------|
| 材料 MATERIAL | 注記参照 SEE NOTES |
| 仕上げ FINISH | 注記参照 SEE NOTES |
| 適用電線範囲 WIRE RANGE | — |
| 被覆外径 INS. RANGE | — |
| DRAWN BY | CHK'D BY |
| APPR'D BY | 尺度 SCALE |

| | |
|---|----------------|
| MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社 | |
| EDP NO. | — |
| ENG. NO. | SD-53314-***15 |
| REV | A |
| TITLE 名称 2mm W-to-B DualRow Straight Header w/ Ejector Ass'y. | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス(株)の所有する情報を含むもので 当社の許可なく複製を禁止する。 MXJ-8

2F3H10J027553314.DGN