

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[8218440000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

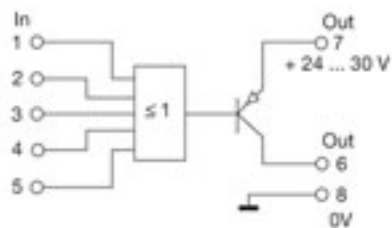

General ordering data

Order No.	8218440000
Part designation	DK OR 35 24VDC
Version	Function component, Max. 20 mA , Screw connection
EAN	4008190191252
Qty.	5 pc(s).

Input

Input current	Approx. 1.5 mA per input (24 V)
Max. voltage	30 V DC
Rated input level	24 V DC= High, 0 V = Low
Pulse duration	≥ 50 μs
Number of inputs	5

Output

Output current	Max. 20 mA
Load resistance, current	≤ 600 Ω
Output level	PNP, $U_b - 0.1.8$ V
Switching thresholds	High <15 V, low < 9 V
Number of outputs	1

General data

Function	OR
Input/Output	Logic module
Galvanic isolation	Without isolation
Type of connection	Screw connection
Mounting rail	TS 35 + TS 32
Current consumption	< 5 mA
Voltage supply	24...30 V DC
Ambient temperature (operational)	0 °C...+50 °C
Storage temperature	-40 °C...+60 °C

Insulation coordination

Insulation voltage input or output/rail	4 kV
---	------

Insulation coordination

Dimensions

Clamping range, max.	4 mm ²
Clamping range, min.	0.5 mm ²
Clamping range, nom.	4 mm ²
Length	65 mm
Height	57 mm
Width	12 mm

Approvals

Approvals institutes	n.a.
----------------------	------

Classifications

ETIM 2.0	EC001417
ETIM 3.0	NK
eClass 4.1	27-24-01-90
eClass 5.0	27-24-22-16
eClass 5.1	27-24-22-16

Similar products

Order No.	Part designation	Version
8184040000	DK AND 35 24VDC	Function component, Max. 20 mA , Screw connection
8248320000	DK NAND 35 24VDC	Function component, Max. 20 mA , Screw connection
8248330000	DK NOR 35 24VDC	Function component, Max. 20 mA , Screw connection
8248340000	DKPL 35 24VDC	Function component, Max. 20 mA , Screw connection