

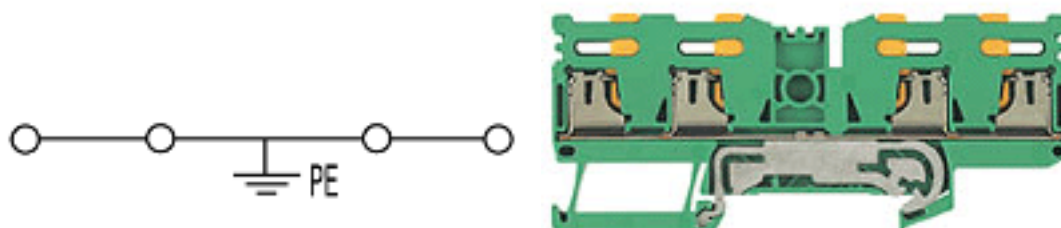
Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1792620000](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


General ordering data

Order No.	1792620000
Part designation	IPE 1.5N/4AN
Version	Earth terminal, 1.5 mm ² , Insulation displacement connection, Wemid, green/yellow, TS 35
EAN	4032248281633
Qty.	100 pc(s).

Product notes

Note, technical data	Conductor < 0.5 mm ² / AWG 24 with IRH 1.5
----------------------	---

PT OKIECEEx/ATEX rating data

EU-type examination certificate	KEMA02ATEX2241U
Download, German	KEMA02ATEX2241U_d.pdf
Download English	KEMA02ATEX2241U_e.pdf
ATEX conductor cross-section	1.5 mm ²
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	Einsatztemperaturbereich siehe EG-Baumusterprüfbescheinigung/IECEX-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

Additional technical data

Colour of insulating material	green/yellow
Connection direction	top
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	4
Open sides	right

Additional technical data

Operating temperature range	- 50 °C, + 120 °C
Product family	I-Series
Type of connection	Insulation displacement connection
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	PE terminal

CSA rating data

Voltage (CSA)	300 V
Min. cross-section (CSA)	AWG 24
Max. cross-section (CSA)	AWG 16

Conductors for clamping (rated connection)

Clamping range, min.	0.21 mm ²
Clamping range, max.	1.5 mm ²
Type of connection	Insulation displacement connection
Connection direction	top
No. of connections	2
Blade size	0.6 x 3.5 mm
Solid, min.	0.21 mm ²
Solid, max.	1.5 mm ²
Flexible, min.	0.21 mm ²
Flexible, max.	1.5 mm ²
Flexible, min.	0.25 mm ²
Flexible, max.	0.34 mm ²
AWG conductor size, min.	AWG 24
AWG conductor size, max.	AWG 16
AWG conductor size, min.	0.21 mm ²
AWG conductor size, max.	1.31 mm ²

Dimensions

Width	5.1 mm
Height of lowest version	40.5 mm
Length	93.5 mm
TS 35 offset	48.5 mm

Mounting rail

Installation advice	TS 35
Length	93.5 mm
Material	Wemid
Standards	IEC 60947-7-2 / IEC 60352-4

PE rating data

PEN function	No
Pollution severity	3
Rated cross-section	1.5 mm ²
Rated impulse withstand voltage to adjacent terminal	6 kV
Rated voltage for adjacent terminal	500 V
Standards	IEC 60947-7-2 / IEC 60352-4

UL rating data

Voltage (UL)	300 V
Min. cross-section (UL)	AWG 24
Max. cross-section (UL)	AWG 16

Approvals

Approvals institutes



Downloads

DXF	32829_IPE_1.4N-4AN_DXF.dxf
STEP	1792620000_32829_IPE_1.5N-4AN_STP.stp

Classifications

ETIM 2.0	EC000901
ETIM 3.0	EC000901
eClass 4.1	27-14-03-05
eClass 5.0	27-14-03-05
eClass 5.1	27-14-03-05

Similar products

Order No.	Part designation	Version
1792560000	IPE 1.5N	Earth terminal, 1.5 mm ² , Insulation displacement connection, Wemid, green/yellow, TS 35
1792590000	IPE 1.5N/3AN	Earth terminal, 1.5 mm ² , Insulation displacement connection, Wemid, green, TS 35