


## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1768860000](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

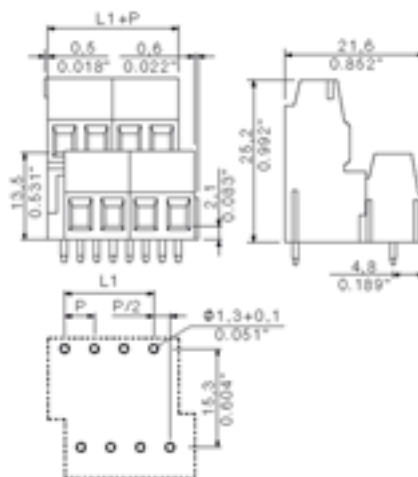

#### General ordering data

Order No.	1768860000
Part designation	LM2N5.08/6 3.5 OR
Version	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 6, 90°, Box
EAN	4032248115594
Qty.	50 pc(s).

#### System parameters

Product family	System LM
Conductor connection system	Clamping yoke connection
Fitted to PCB	Soldered connection
Outgoing direction of conductor	90°
Pitch	5.08 mm
Pitch in inch	0.2 inch
No. of poles	6
Fitted by customer	yes
Max. adjacent poles per row	48
No. of rows	2
Solder pin length	3.5 mm
Dia. of fitting hole	1.3 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	1

#### System parameters

Screwdriver blade	0.6 x 3.5
Screwdriver blade standard	DIN 5264
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.5 Nm
Clamping screw	M 2.5
Stripping length	6 mm
L1 in mm	10.16 mm
L1 in inch	0.4 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

#### Material data

Insulating material	Wemid (PA)
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	I
Flammability class UL 94	V-0
CTI	>= 600
Temperature of glow-wire test	750 °C
Duration of glow-wire test	30 S
Contact base material	Copper alloy
Contact surface	tinned
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C

#### Connectable conductors

Clamping range, min.	0.2 mm <sup>2</sup>
Clamping range, max.	2.5 mm <sup>2</sup>
AWG, min.	24
AWG, max.	14
O.D. of conductor insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	2.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, min.	0.25 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.25 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	1.5 mm <sup>2</sup>
Gauge to EN 60999 a x b; ø	2.4 mm x 1.5 mm; 1.9mm

#### DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, max. No. pins (Tu=20°C)	16 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	14.2 A
Rated voltage for overvoltage class/pollution severity II/2	630 V
Rated voltage for overvoltage class/pollution severity III/2	320 V

DIN IEC rating data	
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Short-time withstand current resistance	3 x 1s with 120 A

CSA rating data	
Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	24
AWG conductor (field wiring), max.	14

UL 1059 rating data	
Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	24
AWG conductor, max.	14

**Approvals**  
 Approvals institutes



Downloads	
CAD Library (P-CAD Format - Standard)	LM2N.lib

Classifications	
ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	NK
eClass 5.0	NK
eClass 5.1	NK

**Similar products**

Order No.	Part designation	Version
1768850000	LM2N5.08/4 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 90°, Box
1768870000	LM2N5.08/8 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 8, 90°, Box

1768880000	LM2N5.08/10 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 10, 90°, Box
1768890000	LM2N5.08/12 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 12, 90°, Box
1768900000	LM2N5.08/14 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 14, 90°, Box
1768910000	LM2N5.08/16 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 16, 90°, Box
1768920000	LM2N5.08/18 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 18, 90°, Box
1768930000	LM2N5.08/20 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 20, 90°, Box
1768940000	LM2N5.08/22 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 22, 90°, Box
1768950000	LM2N5.08/24 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 24, 90°, Box
1768960000	LM2N5.08/26 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 26, 90°, Box
1768970000	LM2N5.08/28 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 28, 90°, Box
1768980000	LM2N5.08/30 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 30, 90°, Box
1768990000	LM2N5.08/32 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 32, 90°, Box
1769000000	LM2N5.08/34 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 34, 90°, Box
1769010000	LM2N5.08/36 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 36, 90°, Box
1769020000	LM2N5.08/38 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 38, 90°, Box
1769030000	LM2N5.08/40 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 40, 90°, Box
1769040000	LM2N5.08/42 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 42, 90°, Box

1769050000	LM2N5.08/44 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 44, 90°, Box
1769060000	LM2N5.08/46 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 46, 90°, Box
1769070000	LM2N5.08/48 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 48, 90°, Box