

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1720810000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

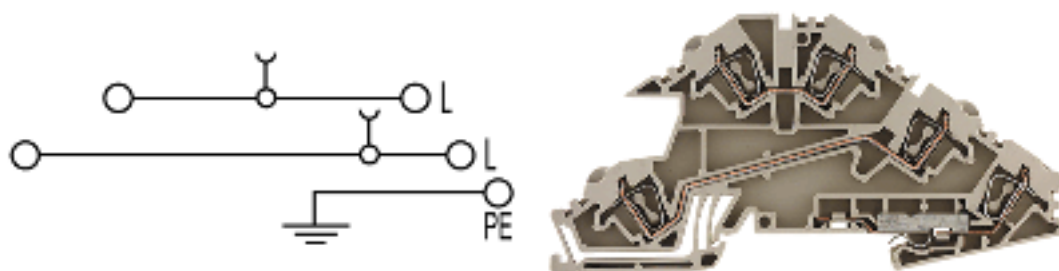

General ordering data

Order No.	1720810000
Part designation	ZDL 2.5 S/L/L/PE
Version	Storey installation terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
EAN	4008190380366
Qty.	50 pc(s).

Product notes

Note, ordering data	Spacing between mounting plates should be 200mm.
Note, technical data	2.5 mm ² flexible conductors with wire end ferrules are crimped with the Weidmüller PZ 6/5 crimping tool.
Product description	N-cross-connections with busbar system 10 x 3 mm.
Note, accessories	The supply to the busbar is via a busbar connection (ZB 35, ZB 16 or ZF 4S).

Additional technical data

Colour of insulating material	dark beige
Connection direction	Inclined / angled
End plate required	Yes
Explosion-tested version "Ex e"	No
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of levels	2
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	Z-series
Type of connection	Tension clamp connection
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0

Additional technical data

Version 3-conductor installation terminal

CSA rating data

Voltage (CSA)	300 V
CSA current	10 A
Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 12

Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm ²

Conductors for clamping (rated connection)

Clamping range, min.	0.13 mm ²
Clamping range, max.	4 mm ²
Type of connection	Tension clamp connection
Connection direction	Inclined / angled
No. of connections	5
Stripping length	8 mm
Blade size	0.6 x 3.5 mm
Gauge to IEC 60947-1	A2
Solid, min.	0.5 mm ²
Solid, max.	4 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	4 mm ²
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228/1)	2.5 mm ²
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm ²
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	2.5 mm ²
AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 12

Dimensions

Width	5.1 mm
Height of lowest version	48.5 mm
Length	95 mm
TS 35 offset	49 mm

Distribution terminals

N-function	No
No. of potentials	2
PE function	Yes
Rated impulse withstand voltage to N/PE	4 kV
Rated voltage to N/PE	250 V

N-conductor disconnect terminal

For N-busbar 3 x 10 mm

Rating data

Rated cross-section	2.5 mm ²
Rated voltage	400 V
Rated impulse voltage	4 kV
Rated current	24 A
Standards	IEC 60947-7-1 (-7-2)
Current with max. conductor	24 A
Pollution severity	3

UL rating data

Voltage (UL)	300 V
Current (UL)	10 A
Min. cross-section (UL)	AWG 26
Max. cross-section (UL)	AWG 12

Approvals

Approvals institutes



Classifications

ETIM 2.0	EC001329
ETIM 3.0	EC001329
eClass 4.1	27-14-11-25
eClass 5.0	27-14-11-25
eClass 5.1	27-14-11-25

Similar products

Order No.	Part designation	Version
1720780000	ZDL 2.5 S/L	Storey installation terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1720760000	ZDL 2.5 S/L/L	Storey installation terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1720770000	ZDL 2.5 S/N	Storey installation terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1720790000	ZDL 2.5 S/N/L	Storey installation terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1720800000	ZDL 2.5 S/N/L/PE	Storey installation terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1720750000	ZDL 2.5S/NT/L/PE	Storey installation terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35