

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[FCI](#)

[10106264-0600002LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER SEE SHEET 2

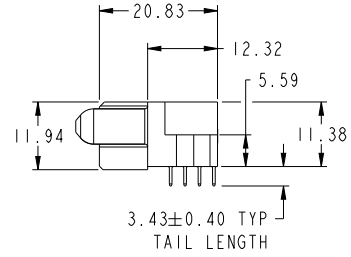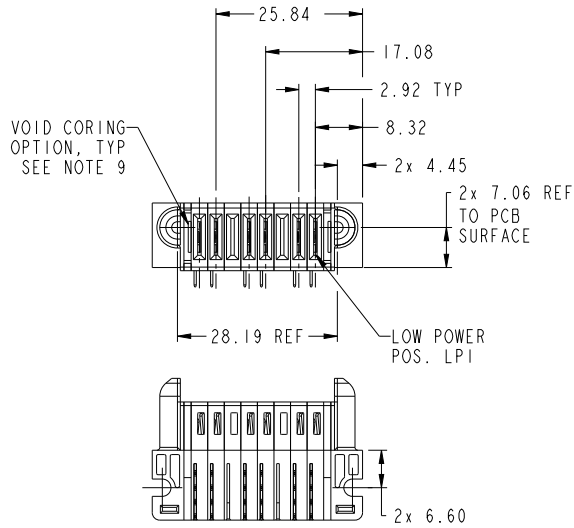

spec ref		*		dr		Rainbow Chan		201505022		projection		MM		size		A3		scale		3:2	
tolerance std		ASME Y14.5		eng		Rainbow Chan		201505028						ecm no		Released					
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr		Pui-Ming Zhang		201505028		product family						PwrBlade+							
surface		linear		0.X		±0.5				6LP		dwg no		10106264-0600002		rev		A			
		0.XX		±0.25																	
		0.XXX		±0.10																	
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw		sheet 1 of 3							

Prod File - REV C - 2010-04-09

1

2

3


PDS: Rev :A

STATUS:Released

Printed: Jan 29, 2015

PRODUCT NO.	ROWS	LOW POWER						
		E1	LP6	LP5	LP4	LP3	LP2	E2
10106264-0600002LF	DCBA							

CODE	DESCRIPTION
LR	STD LOW POWER CONTACT(3,43)

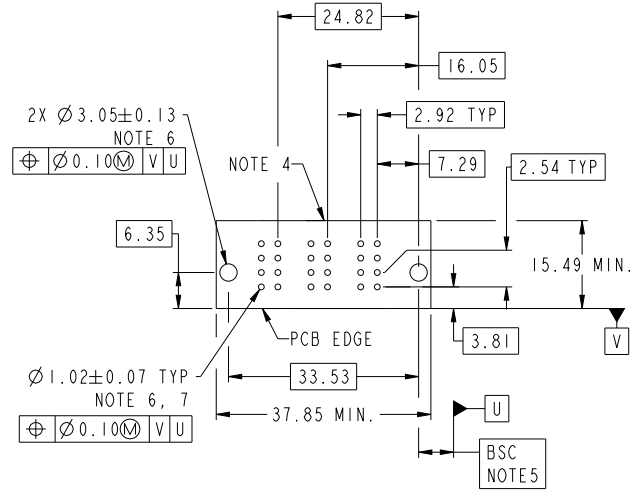

dr	Rainbow Chan	2015/05/22	projection	MM	size	A3	scale	3:2	
eng	Rainbow Chan	2015/05/28			ecn no		-		
chr	-	-							
appr	Pui-Ming Zheng	2015/05/28	product family		PwrBlade+		rel level	Released	
			title		6LP		rev		
www.fci.com			RA STB RECEPTACLE		drg no		10106264-0600002		
cat. no.			Product - Customer Drw		sheet 2 of 3		A		

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) $1.15 \pm 0.025\text{MM}$ DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER $0.0254-0.0762\text{MM}$ Cu PLATING TO ACHIEVE A $1.02 \pm 0.07\text{MM}$ HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Rainbow Chan	2015/02/22		MM	size	A3	scale	3:2
eng	Rainbow Chan	2015/02/26			ecn no	-		
chr	-	-			rel level	Released		
appr		Pui-Ming Zheng	2015/02/26	product family	PwrBlade+			
			title	6LP RA STB RECEPTACLE	dwg no	10106264-0600002	rev	A
www.fci.com			cat. no.	Product - Customer Drw			sheet 3 of 3	