

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[Molex Connector Corporation](#)
[0397040008](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

PART NUMBER DATA							
CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN mm	B IN mm		
2	397040002	M750B-03-5-02-3	GREEN	.52	13.2	.300	7.62
3	397040003	M750B-03-5-03-3	GREEN	.82	20.8	.600	15.23
4	397040004	M750B-03-5-04-3	GREEN	1.12	28.5	.900	22.85
5	397040005	M750B-03-5-05-3	GREEN	1.42	36.1	1.200	30.47
6	397040006	M750B-03-5-06-3	GREEN	1.72	43.7	1.500	38.09
7	397040007	M750B-03-5-07-3	GREEN	2.02	51.3	1.799	45.70
8	397040008	M750B-03-5-08-3	GREEN	2.32	58.9	2.099	53.32
9	397040009	M750B-03-5-09-3	GREEN	2.62	66.6	2.399	60.94
10	397040010	M750B-03-5-10-3	GREEN	2.92	74.2	2.699	68.56
11	397040011	M750B-03-5-11-3	GREEN	3.22	81.8	2.999	76.17
12	397040012	M750B-03-5-12-3	GREEN	3.52	89.4	3.299	83.79

REF. LAST 2 DIGITS OF PART NUMBER EQUALS NUMBER OF POLES

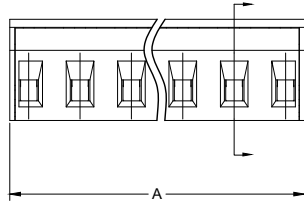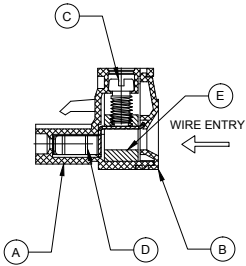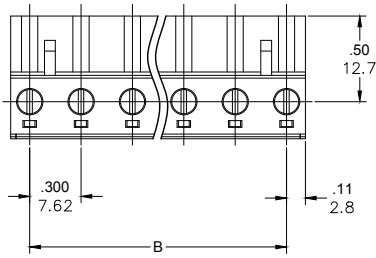

ENGINEERING NUMBER LEGEND

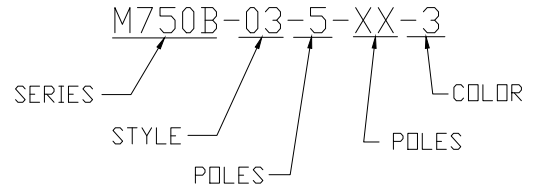

CONTACT FACTORY FOR OPTIONAL COLORS

SPECIFICATIONS

- MATERIAL:
 - A. BODY: PA66.UL94 V-0
 - B. COVER: PA66.UL94 V-0
 - C. TERMINAL SCREW: M3, STEEL. ZINC PLATED
 - D. CONTACT: COPPER ALLOY. TIN PLATED
 - E. CAGE: BRASS NICKEL PLATED
- WIRE SIZE: 30 - 12AWG.
- RATING: 15A AT 51-150V, 10A AT 151 TO 300V
- SCREW TORQUE: 5.0 IN. LBS.
- WIRE STRIP LENGTH: .20 (5.0mm).
- OPERATING TEMPERATURE: -40°C TO +105°C
- MATES WITH HEADER SERIES: 39723
- DIMS SHOWN ARE FOR REFERENCE ONLY

RELEASED EC NO: JPC2014-1194 DRWN: RSTONE 2014/01/22 CHKD: G. FARNS APPR: JFMURPHY 2014/10/16 REV A	QUALITY SYMBOL ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES	±---	±---	DRAWN BY RSTONE	DATE 2014/01/22	TITLE 7.62 EURO PLUG RIGHT ANGLE NO MTG ENDS		
		3 PLACES	±---	±.005	CHECKED BY G. FARNS	DATE ---			
		2 PLACES	±0.13	±.01	APPROVED BY JFMURPHY	DATE 2014/10/16	MOLEX INCORPORATED		
1 PLACE	±0.3	±---	ANGULAR ±---°		MATERIAL NO.	DOCUMENT NO. SD-39704-001	SHEET NO. 1 OF 1		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			