

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Newava Technology Inc.](#)
[S37211](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

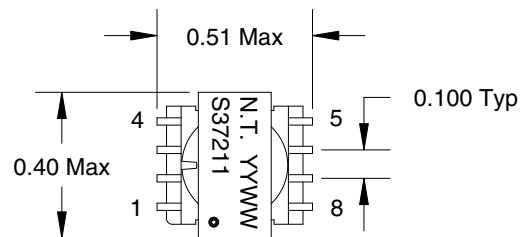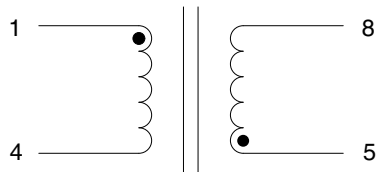

Ref: PWB LAYOUT

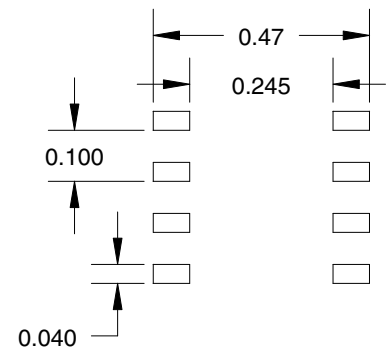

SPECIFICATIONS:

1. INDUCTANCE: @ 10 kHz, 0.1 Vrms,
1 - 4 = 225 uHy MIN
2. DCR: mOHMS
1 - 4 = 0.1 Nom
5 - 8 = 0.1 Nom
3. LEAKAGE INDUCTANCE: 1 - 4, 0.1V @ 100kHz
SHORT 5 - 8 < 0.4 uHy
4. INTERWINDING CAPACITANCE:
1 - 4 to 5 - 8 @ 100 KHz, 1.0V < 15 pf
5. TURNS AND PHASE:
1 - 4 : 5 - 8 = 1 : 1 +/- 2%
6. DIELECTRIC STRENGTH:
1500 VAC 1 sec

A									
REV.	DATE	ECN	BY	DESCRIPTION					
TOLERANCES ON				Newava Tech. Watertown, SD 57201 605-886-0264		Transformer, SMD Digital Audio, 1:1			
.XXX	.XX	ANGLE							
+ -	+ -	+ -		DATE		SCALE		MODEL	
DRAWN:				DATE		SCALE		MODEL	
CHECKED: -				DATE		SCALE		MODEL	
APPROVED: -				DATE		SCALE		MODEL	
				NEXT ASSY:		DRAWING NO.		REV.	
						S37211		A	
THIS PRINT MUST NOT BE COPIED IN WHOLE OR IN PART						OR USED DETRIMENTALLY TO OUR INTEREST			SHEET 1 OF 1