

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0739391002](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

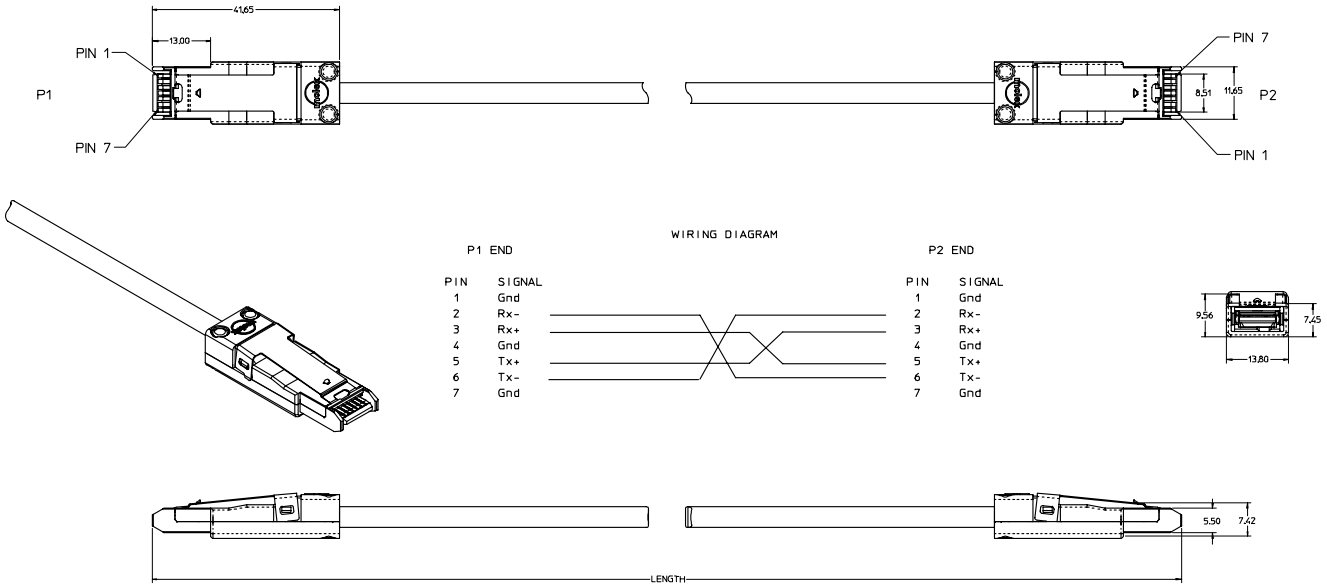

WIRING DIAGRAM

P1 END		P2 END	
PIN	SIGNAL	PIN	SIGNAL
1	Gnd	1	Gnd
2	Rx-	2	Rx-
3	Rx+	3	Rx+
4	Gnd	4	Gnd
5	Tx+	5	Tx+
6	Tx-	6	Tx-
7	Gnd	7	Gnd



MOLEX P/N	LENGTH	TOLERANCE
73939-1001	.05M	±.03M
73939-1002	1M	±.03M
73939-1014	1.5M	±.03M
73939-1003	2M	±.03M
73939-1004	3M	±.03M
73939-1005	5M	±.03M
73939-1006	10M	±.03M

NOTES:

- MATERIALS**
 CABLE - FULLY SHIELDED PER 71153-****
 HOUSING - ZINC ALLOY, PLATED BRIGHT TIN
 LATCH - PHOSPHOR BRONZE, PLATED BRIGHT TIN
 PRINTED CIRCUIT BOARD - FR4
 STRAIN RELIEF - THERMOPLASTIC BLACK MOLDING COMPOUND, FLEXIBLE
- MATES WITH MOLEX SERIES 74703 RECEPTACLE**

ENTER DESCRIPTION EIC NO: USY2008-0080 DRAWN BY: 2008/07/24 CHECKED BY: 2008/07/24 APPROVED BY: 2008/10/17	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	<input checked="" type="checkbox"/> THIRD ANGLE PROJECTION	
		4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±0.25 ±--- 1 PLACE ±0.3 ±---	DIM INCH DIM INCH	DRAWN BY: DSL CHECKED BY: DAYE APPROVED BY: DSL DATE: 00/10/16 DATE: 00/10/26 DATE: 00/10/26	TITLE HSSDC II PLUG TO PLUG UNEQUALIZED				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		MATERIAL NO. MOLEX		DOCUMENT NO. SD-73939-1***	
		SET THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							