

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Rohm Semiconductor](#)  
[SLA580BBT3F](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## High Brightness Type $\phi 5$ Circular Type LED Lamps <Focus Type $2\theta 1/2:12^\circ$ >

### SLA-580 Series

Shape	Emitting Surface Dimension (mm)	Blue		Green		Red						
		InGaN on SiC				GaP						
		468nm	523nm	518nm	563nm	GaAlAs on GaAs						
Circular Type	$\phi 5.0$				SLA580BBT	SLA580BCT	SLA580BDT	SLA580EBT	SLA580ECT	SLA580EDT	SLA-580MT	SLA-580LT

Note) "-" will be taken out for emitting color B/E series.


### Absolute Maximum Ratings (Ta=25°C)

Part No.	Emitting color	Power dissipation $P_D$ (mW)	Forward current $I_F$ (mA)	Peak forward current $I_{FP}$ (mA)	Reverse voltage $V_R$ (V)	Operating temperature $T_{opr}$ (°C)	Storage temperature $T_{stg}$ (°C)
SLA580BBT	Blue						
SLA580BCT	Blue	120	30	100*1	5	-20 to +80	
SLA580BDT	Green						
SLA580EBT	Green						
SLA580ECT	Green						
SLA580EDT	Green						
SLA-580MT	Red	75	25	60*2	4	-25 to +85	
SLA-580LT	Red	100	50	75*2			

\*1:  $I_{FP}$  measured under duty  $\leq 1/10,1\text{kHz}$

\*2:  $I_{FP}$  measured under duty  $\leq 1/5$ , pulse width  $\leq 1\text{ms}$ .


### External Dimensions (Unit : mm)

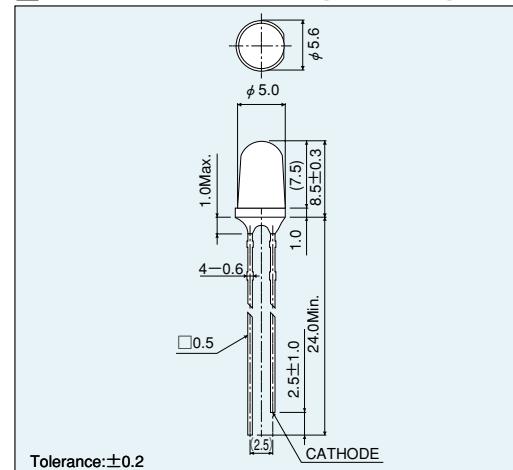


### Electrical Optical Characteristics (Ta=25°C)

Part No.	Resin Color	Forward voltage $V_F$		Reverse current $I_R$		Light wavelength Peak $\lambda_p$		Brightness $I_v$		
		Typ. (V)	$I_F$ (mA)	Max. ( $\mu\text{A}$ )	$V_R$ (V)	Typ. (nm)	Half-wave $\Delta\lambda$	Min. (mcd)	Typ. (mcd)	$I_F$ (mA)
SLA580BBT	Transparent Clear	3.5	20	100	5	468	26	610	1500	20
SLA580BCT										
SLA580BDT		3.8	20	100	5	523	36	900	2500	20
SLA580EBT										
SLA580ECT		2.3	20	10	4	518	35	1350	4000	20
SLA580EDT										
SLA-580MT		1.75	20	100	4	563	40	2000	4500	20
SLA-580LT										


### Directivity

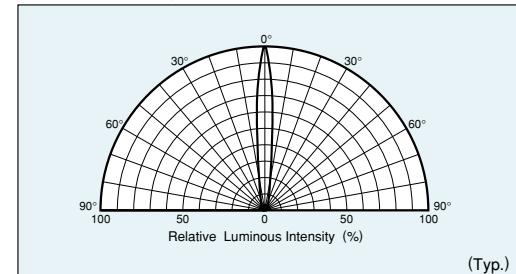

### Recommended Pad Layout

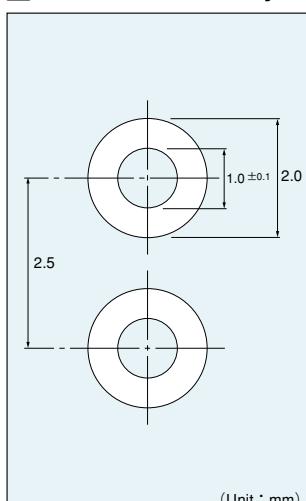


### Packaging Specifications (Unit : mm)

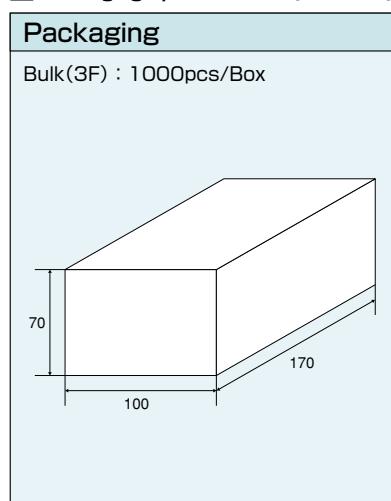


## ■ Electrical Characteristic Curves


### Forward Current - Forward Voltage

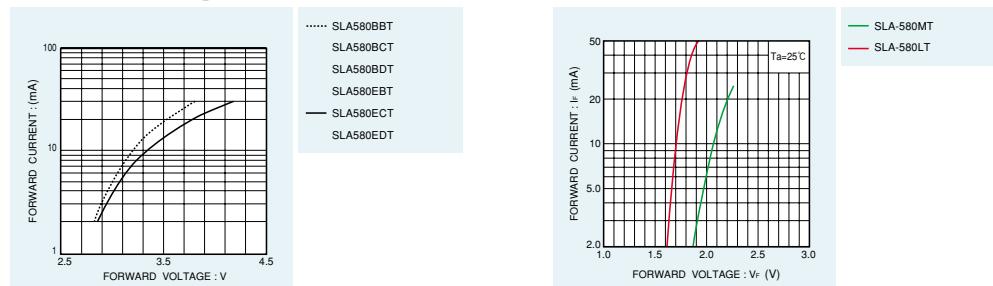


### Relative Luminous Intensity - Case Temperature

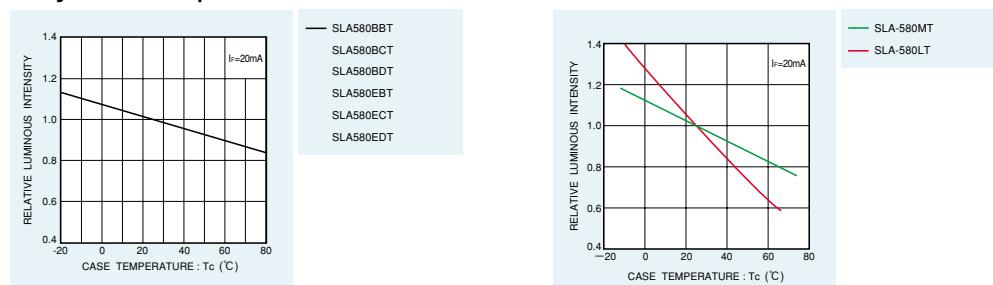


### Relative Luminous Intensity - Forward Current

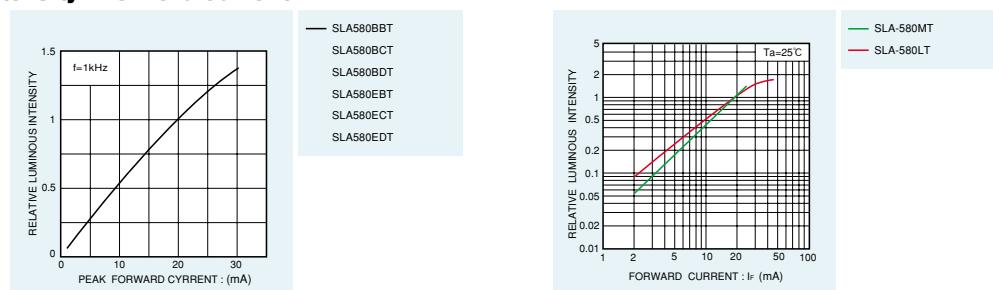

### Ratio of Maximum Tolerable Peak Current - Pulse Duration

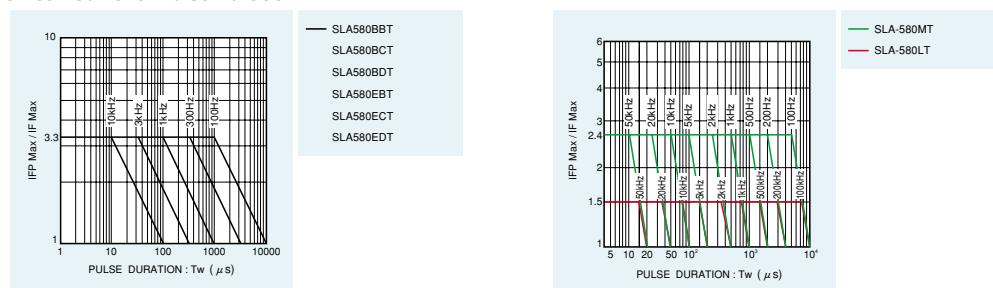

### Derating

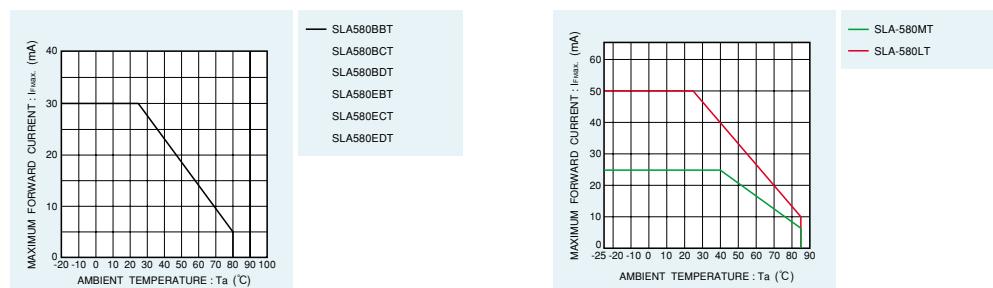

## Appendix

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.