

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies](#)

[ALO04B48N-S](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# 66Watts

## AEO/ALO25

High Efficiency

Total Power: 66 Watts  
 Input Voltages: 48V  
 No. of Outputs: Single

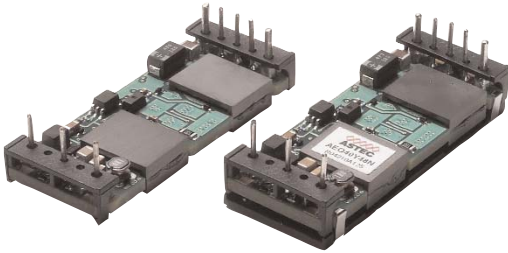

### Special Features

- 2.3" x 0.9" Industry Standard 8th brick outline
- Baseplate or Openframe construction
- Low Ripple and Noise
- Regulation to zero load
- High Capacitive Load start-up
- Fixed Frequency Switching for EMI predictability
- Industry Standard features: Input UVLO with hysteresis, Enable, OVP, OCP, OTP, Output VoltageTrim, Differential Remote Sense
- Meets Basic Insulation
- EU Directive 2002/95/EC compliant for RoHS

### Environmental

Operating Ambient Temperature  
 Openframe: -40°C to +85°C Ambient  
 Baseplate: -40°C to +100°C Case  
 Storage temperature: -55°C to +125°C  
 MTBF: > 1 Million Hrs

### Safety

UL, cUL 60950-1 Recognized  
 TUV EN60950-1 Licensed

### Electrical Specs

#### Input

Input Range 36 to 75 VDC  
 Input Surge 100V /100ms  
 Input UVLO 33 - 36 V (UVLO ON)  
 31 - 34 V (UVLO OFF)  
 Efficiency<sup>2</sup> 93% @ 5 V (typical)

#### Output

Line / Load Regulation < 0.1% V<sub>O</sub> (typical)  
 Load Current Up to 25A for V<sub>O</sub> ≤ 1.8V  
 Noise/Ripple<sup>1</sup> 20mV<sub>PK-PK</sub> (typical for V<sub>O</sub> ≤ 2.5V )  
 Transient Response 2% typical deviation  
 (50% to 75% Step Load)  
 < 100μs settling time (typ)  
 Over Voltage Protection 130% V<sub>O</sub> Typ (autorecovery)  
 Over Current Protection 130% I<sub>O,max</sub> Typ (autorecovery)  
 Over Temperature Protection 115°C average PCB temperature  
 (autorecovery)  
 Switching Frequency Fixed Frequency  
 Isolation Voltage 1500Vdc

#### Control

Output Voltage Trim ±10% V<sub>O,NOM</sub>  
 Enable TTL compatible  
 (Positive or Negative Logic)

AMERICAS

5810 Van Allen Way  
Carlsbad, CA 92008  
Telephone: 760-930-4600  
Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX, UK  
Telephone: 44 (1384) 842-211  
Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21  
Tower 1, Metroplaza  
223, Hing Fong Road  
Fwai Fong, New Territories  
Hong Kong  
Telephone: 852-2437-9662  
Facsimile: 852-2402-4426



## Ordering Information

Input Voltage	Output Voltage	Output Current	Efficiency <sup>2</sup>	Model Number
36V to 75V	12.0V	4A	93.0%	A(X)O04B48 (N) - (6)(S)(L)
36V to 75V	5.0V	12A	92.0%	A(X)O12A48 (N) - (6)(S)(L)
36V to 75V	3.3V	20A	91.0%	A(X)O20F48 (N) - (6)(S)(L)
36V to 75V	2.5V	20A	90.0%	A(X)O20G48 (N) - (6)(S)(L)
36V to 75V	1.8V	25A	88.5%	A(X)O25Y48 (N) - (6)(S)(L)
36V to 75V	1.5V	25A	86.5%	A(X)O25M48 (N) - (6)(S)(L)
36V to 75V	1.2V	25A	85.5%	A(X)O25K48 (N) - (6)(S)(L)

OPTIONS:

(X) : "L" = Open Frame / Low Profile  
"E" = Baseplate Construction

(N) : "N" = designates Negative Logic Enable (default is Positive Enable with no suffix "N" required)

(6) : "-6" = 3.7mm nominal pin length (default is 5mm nominal pin length with no suffix "-6" required)

(S) : "-S" = Surface Mount Termination (default is Through Hole Termination with no suffix "-S" required)<sup>7</sup>

(L) : "L" = RoHS compliant (RoHS 6) / "Blank" - RoHS compliant with Lead (PB) in solder exemption (RoHS 5)

## Pin Assignment

### Single Output


1. +Vin
2. Enable (On/Off)
3. -Vin
4. -V<sub>OUT</sub>
5. -Sense
6. Trim
7. +Sense
8. +V<sub>OUT</sub>

Notes:


1. Measured at 20 MHz bandwidth with external 10 μF tant. capacitor in parallel with 0.1 μF ceramic capacitor connected across +V<sub>out</sub> and -V<sub>out</sub>; 220 μF e-cap or equivalent connected across +V<sub>in</sub> and -V<sub>in</sub>.
2. Efficiency measurements taken at full load, nominal line and T<sub>A</sub> = 25°C.
3. All specifications are typical at nominal line, full load and T<sub>A</sub> = 25°C unless otherwise noted.
4. All specifications subject to change without notice.
5. Mechanical drawings are for reference only. Dimensions are in inches [mm]. Pin placement tolerance ± 0.005 [0.127]. Mechanical Tolerance ± 0.02 [0.5], recommended surface mount pads (min: 0.080 x 0.112 [2.03 x 2.84] / max: 0.092 x 0.124 [2.34 x 3.15]); through hole pin diameter (Pins 4 & 8) ∅ = 0.062 [1.57], others ∅ = 0.04 [1.0] (6X).
6. Technical Reference Notes should be consulted for detailed information when available.
7. AEOxxxxx-Sx series (surface mount terminated with baseplate) are not reflow compatible.
8. Warranty 2 yrs.

Astec reserves the right to make changes to the information contained herein without notice and assumes no liability as a result of its use and application. (REV 02: MARCH 7, 2007).


### ALO - OPENFRAME

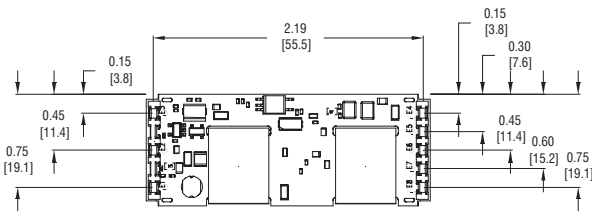

### SMT - Termination

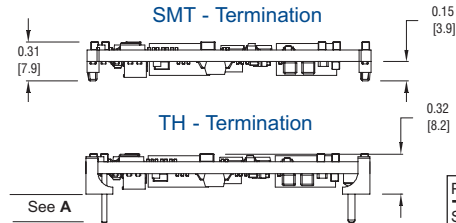

### TH - Termination




PIN LENGTH	A
Std Pin Length:	0.189 [4.8] MIN 0.205 [5.2] MAX
"-6" Option:	0.137 [3.5] MIN 0.152 [3.9] MAX

### AEO - BASEPLATE



### SMT - Termination

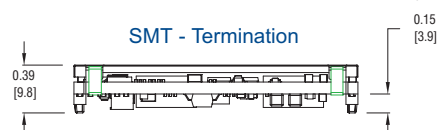

### TH - Termination

