

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[6340](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model 6340  
 Deluxe DMM Maxi Test  
 Lead Kit**

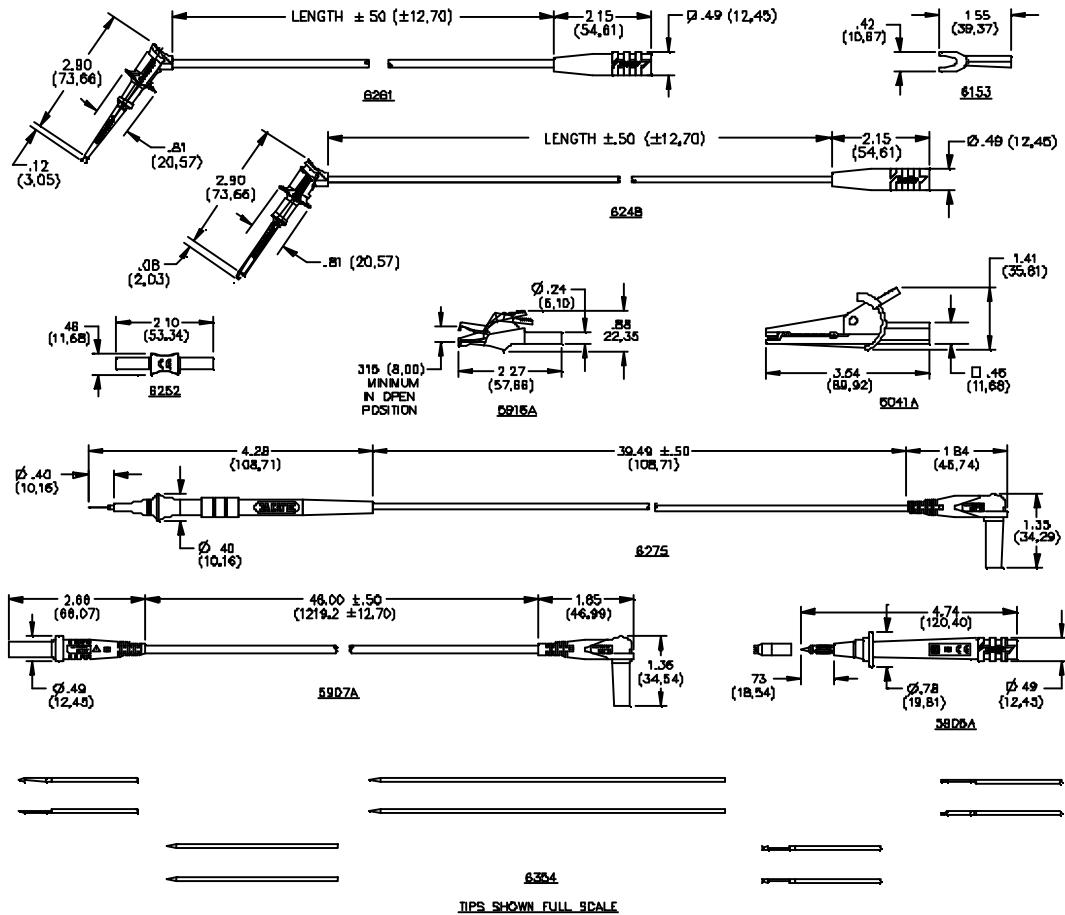

**FEATURES:**

- Test probes and leads comply with IEC 1010-2-031 requirements
- Probes, alligator clips & spade lugs fit directly onto test leads for test versatility
- Test accessories conveniently store in the tri-fold nylon pouch provided
- Compatible with most Fluke, H.P., Tektronix & Wavetek digital multimeters
- Kit contains one set of black and red items below

**MATERIALS:**

Model: **6261**: Minipincer to Banana Jack: Body: Nylon Pincer: Beryllium-Copper, Gold Plated  
 Wire: 18 AWG, 65 x 36 Tinned Copper, Insulation – Silicone, .144" (3.66 mm) O.D.,  
 Banana Jack Body – Brass, Nickel Plated Insulation – Nylon. **RATINGS:** Category II, 300V 5 Amperes

All dimensions are in inches. Tolerances (except noted): .xx ± .02" (.51 mm), .xxx ± .005" (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies. Made in USA

# Pomona<sup>®</sup>

## Model 6340 Deluxe DMM Maxi Test Lead Kit

Model **6275**: Precision Electronic Probe: Right Angle Sheathed Banana Plug: Plug Body: Nickel plated brass. Banana Plug Spring: Nickel Plated Beryllium copper. Insulation: Polypropylene, Fire Retardant. Wire: 24 AWG, silicon rubber .089 (2,26mm) O.D., Tips: Stainless Steel and one full set of replacement tips, see below. **RATINGS**: Operating Temperature; 55° C., Voltage: CAT III 1000V, 3 Amperes

Model **6041B**: Large Alligator Clip: Body-Steel, Nickel plated, Insulation-Nylon, Color: One Black, One Red, **RATINGS**: Voltage: 1000 VRMS, 10 Amperes

Model **6153**: Spade Lug w/ Jack: ETP 110 Copper, 1/2 Hard. Finish: Nickel Plated

Model **6252**: Banana Plug Coupler: Brass, Nickel Plated, Insulation: Nylon, **RATINGS**: CAT III 1000V, 10 Amperes

Model **6248**: Minigrabber to Banana Jack: Body: Nylon, Hook: Beryllium Copper, Gold Plated, Wire: 18 AWG, Insulation – Silicone, .144", Banana Jack: Body – Brass, Nickel Plated, Insulation – Nylon, **RATINGS**: Category II, 300V, 5 Amperes

Model **5907A**: Test Lead Straight to Right Angle: Banana Spring: Nickel plated Beryllium Copper, Insulation – Polypropylene, Wire: 48" silicone 18" AWG, Color: One Black, One Red, **RATINGS**: CAT III 1000V, 10 Amperes

Model **5906A**: Modular Probe with Banana Plug Tip: Probe Body: Nylon, Plug Tip: Brass, Nickel Plated, Spring – Beryllium Copper, Nickel Plated, 4mm Safety Jack: Brass, Nickel Plated, **RATINGS**: CAT III 1000V, 10 Amperes

Model **5916A**: Medium Alligator Clip: Body–Steel, Nickel Plated, Color: One Black, One Red, **RATINGS**: CAT II 300V, 5 Amperes

Model **6354**: Set of 5 Replacement Tips for the Model 6275 Probe

**ORDERING INFORMATION: 6340** (Includes a kit of items from above)

Replacement P/N's: Model **6041A**: Ex-Large Alligator Clip Set, Model **5916A**: Medium Alligator Clip Set, Model **6153**: Spade Lug, Model **6248-12-\***: Minigrabber Jack, Model **5906A**: Modular Test Probe Set, Model **5907A**: Test Lead Set Straight to Right Angle, Model **6252**: Coupler Set, Model, **6261-12-\***: Minipincer/Jack, Model **6275**: Precision Electronic Probe Set, Model **6354**: Set of 5 replacement tips 2 each: Plunger tip, gold plated, 1" & 3" stainless steel Straight tips, 3 point crown tip, plunger, and 4 point plunger tip.

\* 0 - Black, 2 - Red Set = 1 Black, 1 Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA