

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Digital View Inc.](#)
[KIT 60109](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

CNC1 Pin Assignment Connector : JST XHD12	
pin #	description
12	no connection
11	OSD Select UP
10	OSD Select Down
9	OSD Plus/Right
8	OSD Minus/Left
7	OSD Menu
6	Ground
5	Backlight Brightness
4	VR pin B
3	VR pin WIP
2	Power Switch B
1	Power Switch A

CNC2 Pin assignment Connector : Hirose DF13-9F	
pin #	description
9	Ground
8	Adjust Down/Decrease/Left
7	Adjust Up/Increase/Right
6	Select Down
5	Select Up
4	Ground
3	No connection
2	No connection
1	Power On/Off

Jumper setting :




JP1 : SWAP DEC/INC SWITCH
1-2,3-4 closed : NORMAL
1-3,2-4 closed : SWAPPED

JP2 : SWAP SEL UP/DN SWITCH
1-2,3-4 closed : NORMAL
1-3,2-4 closed : SWAPPED

JP3 : SWAP BRIGHTNESS INC/DEC SWITCH
1-2,3-4 closed : NORMAL
1-3,2-4 closed : SWAPPED

JP5 : 1-2 closed : Disable On/Off power button control
Open : Enable On/Off power button control(Default)

JP6 : 1-2 closed : Default power on (JP5 set open)
3-4 closed : Default power off (JP5 set open)

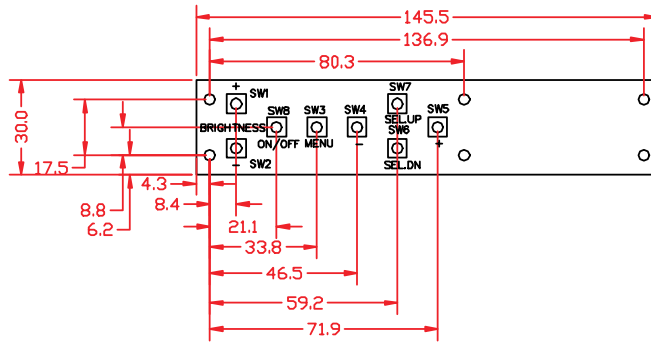

To OSD
Switch Mount
CNC1



OSD Cable:
P/N:420680260 (12/12WAY), 150mm

Other options:
P/N:426120400 (12/12WAY), 300mm
P/N:426120410 (12/12WAY), 610mm

To LCD
Interface
Controller

<p>Title: Digital Switch Mount (10K)</p> <p>NOTE: All dimensions are in mm</p>	<p>Date: 31. 8. 2004</p> <p>KIT 60109 OSD GUIDE</p>
--	--