

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ON Semiconductor](#)

[MJL0281A](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# MJL0281A (NPN) MJL0302A (PNP)

Preferred Devices

## Complementary NPN-PNP Power Bipolar Transistors

These complementary devices are lower power versions of the popular MJL3281A and MJL1302A audio output transistors. With superior gain linearity and safe operating area performance, these transistors are ideal for high fidelity audio amplifier output stages and other linear applications.

### Features

- Exceptional Safe Operating Area
- NPN/PNP Gain Matching within 10% from 50 mA to 3.0 A
- Excellent Gain Linearity
- High BVCEO
- High Frequency
- Pb-Free Packages are Available\*

### Benefits

- Reliable Performance at Higher Powers
- Symmetrical Characteristics in Complementary Configurations
- Accurate Reproduction of Input Signal
- Greater Dynamic Range
- High Amplifier Bandwidth

### Applications

- High-End Consumer Audio Products
  - ◆ Home Amplifiers
  - ◆ Home Receivers
- Professional Audio Amplifiers
  - ◆ Theater and Stadium Sound Systems
  - ◆ Public Address Systems (PAs)

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO}$	260	Vdc
Collector-Base Voltage	$V_{CBO}$	260	Vdc
Emitter-Base Voltage	$V_{EBO}$	5.0	Vdc
Collector-Emitter Voltage - 1.5 V	$V_{CEX}$	260	Vdc
Collector Current - Continuous - Peak (Note 1)	$I_C$	15 30	Adc
Base Current - Continuous	$I_B$	1.5	Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$	$P_D$	180	Watts
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +150	$^\circ\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Pulse Test: Pulse Width = 5.0 ms, Duty Cycle < 10%.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.




ON Semiconductor®


<http://onsemi.com>

15 AMPERES  
COMPLEMENTARY SILICON  
POWER TRANSISTORS  
260 VOLTS - 180 WATTS

TO-264  
CASE 340G  
STYLE 2



### MARKING DIAGRAM



MJL0xxxA = Device Code  
 xxx = 281 or 302  
 A = Location Code  
 YY = Year  
 WW = Work Week  
 G = Pb-Free Package

### ORDERING INFORMATION

Device	Package	Shipping
MJL0281A	TO-264	25 Units/Rail
MJL0281AG	TO-264 (Pb-Free)	25 Units/Rail
MJL0302A	TO-264	25 Units/Rail
MJL0302AG	TO-264 (Pb-Free)	25 Units/Rail

Preferred devices are recommended choices for future use and best overall value.

### MJL0281A (NPN) MJL0302A (PNP)

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.69	$^{\circ}C/W$

#### ELECTRICAL CHARACTERISTICS ( $T_C = 25^{\circ}C$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

#### OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage ( $I_C = 30\text{ mA}$ , $I_B = 0$ )	$V_{CE(sus)}$	260	-	V
Collector Cutoff Current ( $V_{CB} = 260\text{ V}$ , $I_E = 0$ )	$I_{CBO}$	-	10	$\mu A$
Emitter Cutoff Current ( $V_{EB} = 5.0\text{ V}$ , $I_C = 0$ )	$I_{EBO}$	-	5.0	$\mu A$

#### ON CHARACTERISTICS

DC Current Gain ( $I_C = 0.5\text{ A}$ , $V_{CE} = 5.0\text{ V}$ ) ( $I_C = 1.0\text{ A}$ , $V_{CE} = 5.0\text{ V}$ ) ( $I_C = 3.0\text{ A}$ , $V_{CE} = 5.0\text{ V}$ )	$h_{FE}$	75 75 75	150 150 150	-
Collector-Emitter Saturation Voltage ( $I_C = 5.0\text{ A}$ , $I_B = 0.5\text{ A}$ )	$V_{CE(sat)}$	-	1.0	V
Base-Emitter On Voltage ( $I_C = 5.0\text{ A}$ , $V_{CE} = 5.0\text{ V}$ )	$V_{BE(on)}$	-	1.2	V

#### DYNAMIC CHARACTERISTICS

Current-Gain - Bandwidth Product ( $I_C = 1.0\text{ A}$ , $V_{CE} = 5.0\text{ V}$ , $f_{test} = 1.0\text{ MHz}$ )	$f_T$	30	-	MHz
Output Capacitance ( $V_{CB} = 10\text{ V}$ , $I_E = 0$ , $f_{test} = 1.0\text{ MHz}$ )	$C_{ob}$	-	400	pF

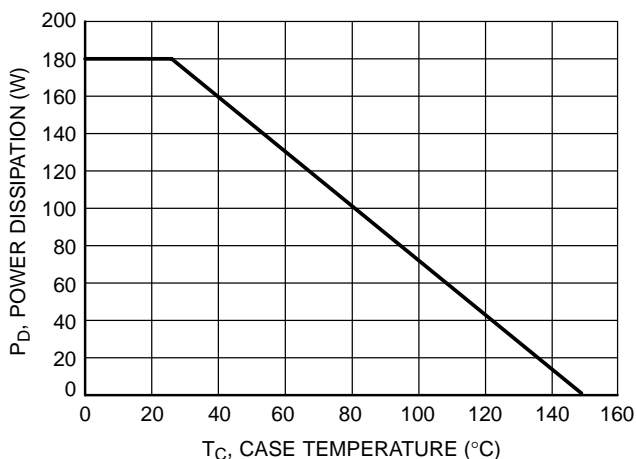


Figure 1. Power Derating



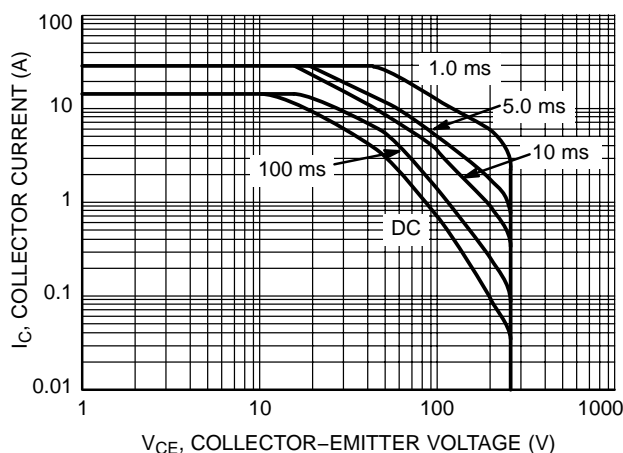


Figure 2. Safe Operating Area


**MJL0281A (NPN) MJL0302A (PNP)**

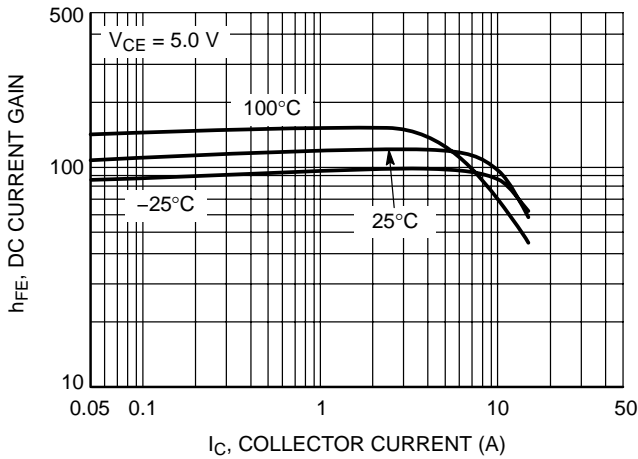


**Figure 3. MJL0281A DC Current Gain**

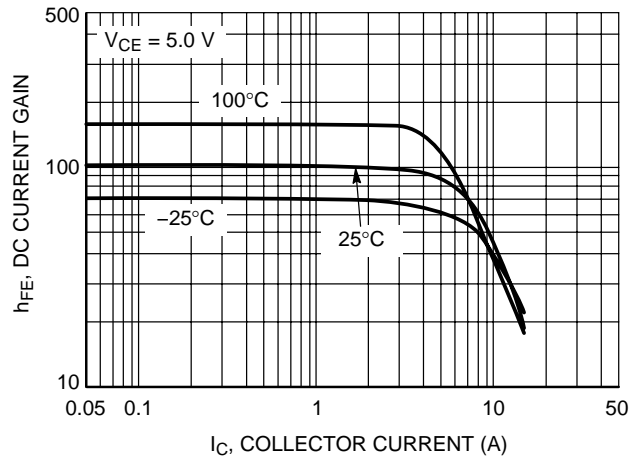


**Figure 4. MJL0302A DC Current Gain**

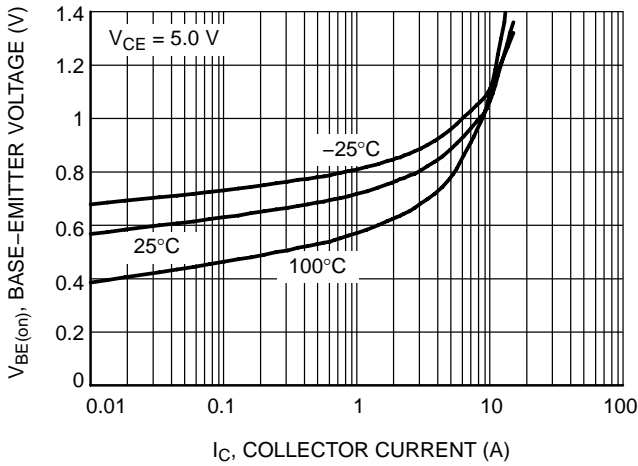


**Figure 5. MJL0281A Base-Emitter Voltage**

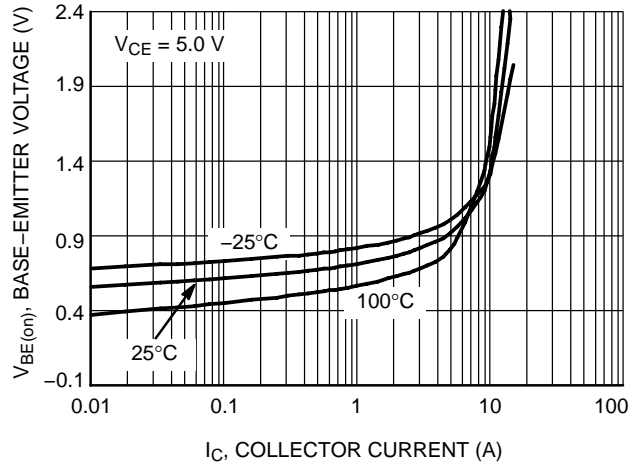

**Figure 6. MJL0302A Base-Emitter Voltage**

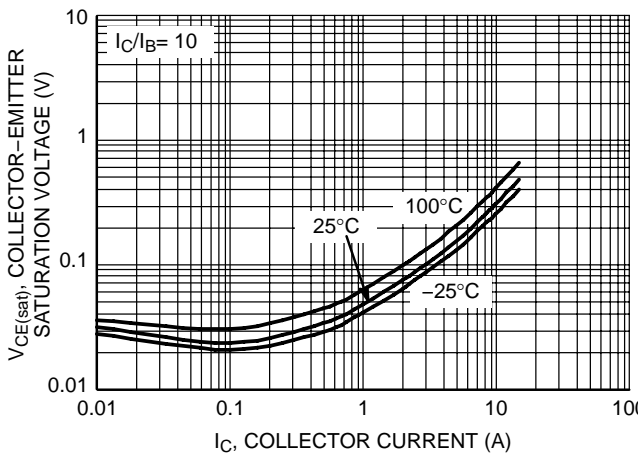


**Figure 7. MJL0281A Saturation Voltage**

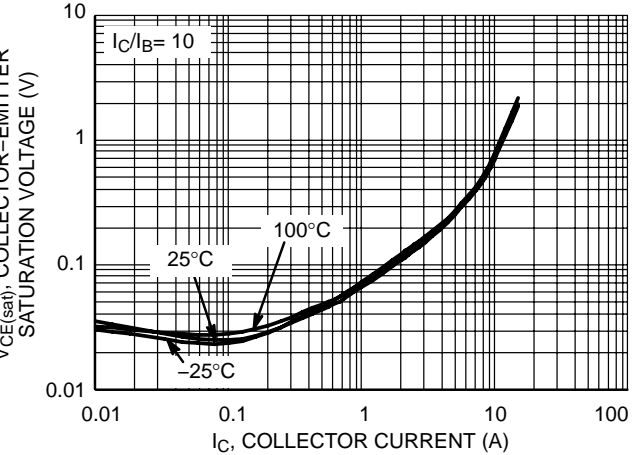


**Figure 8. MJL0302A Saturation Voltage**

**MJL0281A (NPN) MJL0302A (PNP)**

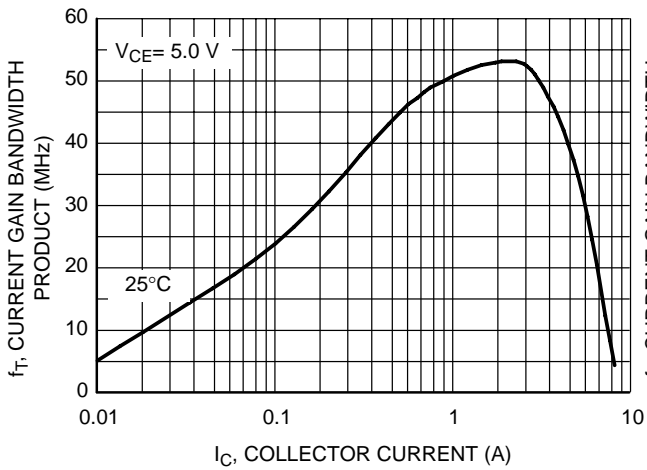

**Figure 9. MJL0281A Current Gain Bandwidth Product**

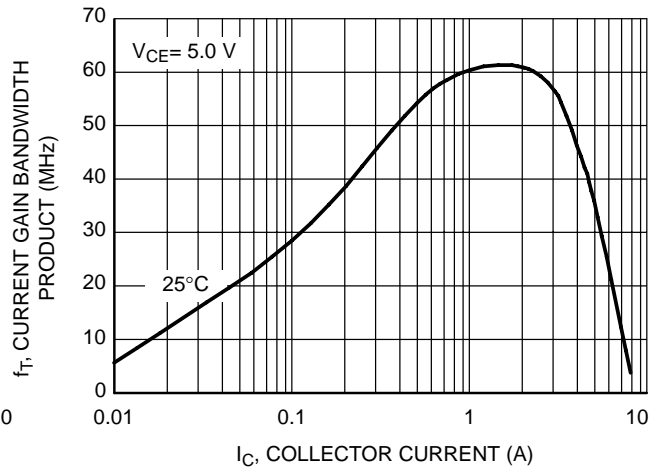


**Figure 10. MJL0302A Current Gain Bandwidth Product**

## MJL0281A (NPN) MJL0302A (PNP)

### PACKAGE DIMENSIONS

#### TO-3BPL (TO-264) CASE 340G-02 ISSUE J

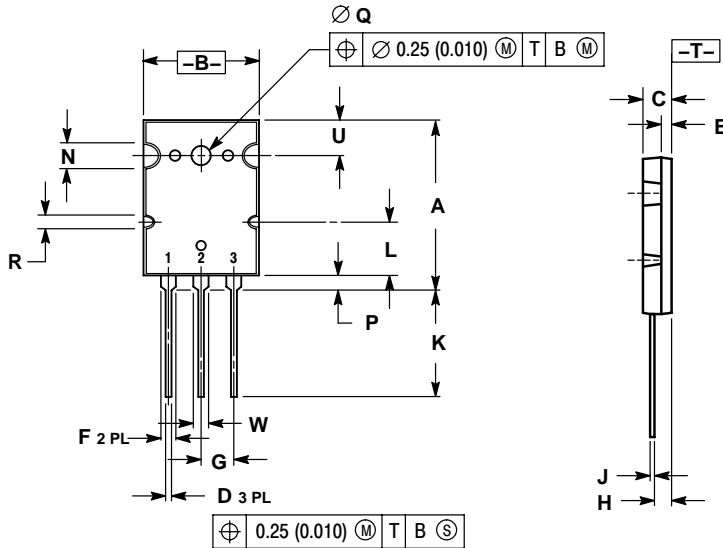

#### NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	28.0	29.0	1.102	1.142
B	19.3	20.3	0.760	0.800
C	4.7	5.3	0.185	0.209
D	0.93	1.48	0.037	0.058
E	1.9	2.1	0.075	0.083
F	2.2	2.4	0.087	0.102
G	5.45 BSC		0.215 BSC	
H	2.6	3.0	0.102	0.118
J	0.43	0.78	0.017	0.031
K	17.6	18.8	0.693	0.740
L	11.2 REF		0.411 REF	
N	4.35 REF		0.172 REF	
P	2.2	2.6	0.087	0.102
Q	3.1	3.5	0.122	0.137
R	2.25 REF		0.089 REF	
U	6.3 REF		0.248 REF	
W	2.8	3.2	0.110	0.125

#### STYLE 2:

1. BASE
2. COLLECTOR
3. EMITTER

PowerBase is a trademark of Semiconductor Components Industries, LLC (SCILLC)

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
 P.O. Box 5163, Denver, Colorado 80217 USA  
 Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
 Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
 Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free  
 USA/Canada

Europe, Middle East and Africa Technical Support:  
 Phone: 421 33 790 2910

Japan Customer Focus Center  
 Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
 Sales Representative