

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Energizer Battery Company](#)
[CHFMBW-4](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT DATASHEET

NiMH Battery Charger (CHFM)

Asia Pacific Region
[Download Instructions](#)

Easy Charger

SAFE

- Safety on/off switch




EASY

- Convenient displays tell when charge is complete



ECONOMICAL

- Batteries can be charged hundreds of times

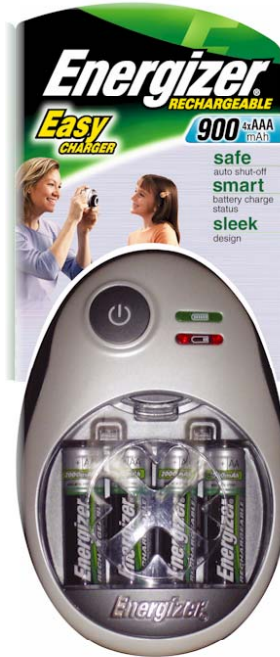

Before Using Your Charger:
 Please read all instructions and cautionary markings on the battery charger, batteries, and device.

Product Detail:

Designation: Easy Charger - Asia Pacific Region
Color: Gun Metal Gray with Pearl Face Plate
Charge Capability: "AA" (2) or (4)
 "AAA" (2) or (4)
 "AA" (2) and "AAA" (2) Simultaneously

Charging Time: (estimate)	Battery	Capacity	Estimated
	(NiMH)	(mAh)	(time)
	AA	2650	9.0 hrs
	AA	2500	8.5 hrs
	AA	2000	7.0 hrs
	AAA	1000	10.0 hrs
	AAA	900	9.0 hrs
	AAA	700	7.0 hrs

Shutoff Mechanism: Delta V Detection
 Timer (10 hours ± 30 minutes)
 Temperature detection at 55°C

Charging Current: AA @ DC 2.8V, 360mA ± 10%
 AAA @ DC 2.8V, 120mA ± 10%

Trickle Charge: None

Input Rating: Universal Voltage: 100-240vac, 50/60Hz

Input Current: Maximum 150mA at AC 120V/60Hz

Input Power: ≤ 6W

Typical Weight: 166.5 grams (5.9 oz.)

Dimensions (mm): 133 x 89 x 32 (H x L x W)

Rev Polarity Protection: Yes

Primary Battery Detection: Yes

Important Notice

This datasheet contains information specific to products manufactured at the time of its publication.

© Energizer

Contents herein do not constitute a warranty.