

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)
[0008520125](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

NOTES:


1. MATERIAL: SEE LEGEND
2. FINISH: SEE LEGEND
3. PRODUCT SPECIFICATION: PS-40-02
4. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
5. CRIMP FOR 22 TO 26 GA. WIRE WITH MAX. INSULATION DIA. OF (1.65)/.005
6. THIS PRODUCT CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

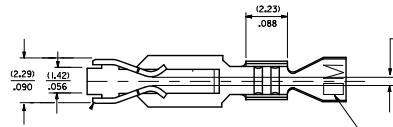


FACTORY I.D. LOCATION IS OPTIONAL

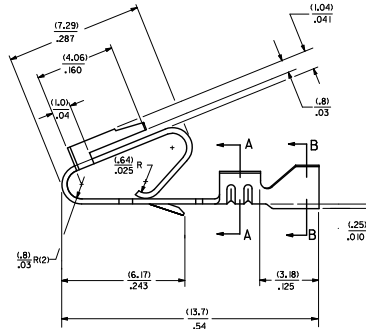


SECTION B-B



SECTION A-A




SELECTIVE PLATING AREA



CUT OFF DIM

MAT'L: (.27)/.016 THK J
7258 FORM
BLANK=BRASS
A=PHOS. BRONZE
PLATING PER SDES - 88
(909) - HOT TIN DP: (0.00254)/.000100 MIN.
(558) - SELECT GOLD: (0.000761)/.000030 MIN.
OVERALL GOLD FLASH: (0.000051)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.001271)/.000050 MIN.
(561) - SELECT GOLD: (0.000761)/.000030 MIN.
OVERALL NICKEL UNDERPLATE: (0.001271)/.000050 MIN.
(555) - SELECT GOLD: (0.000381)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.000761)/.000030 MIN.

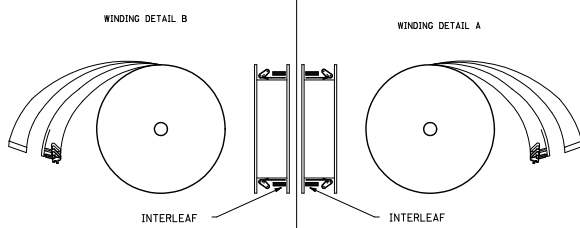

QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH		
4 PLACES	±.010	±.010	±.010	DRAWN BY	DATE	JJS	12/03/87	TRIFURCON TERMINAL CRIMP TYPE .156 CENTERS 22 TO 26 AWG			
3 PLACES	±.010	±.010	±.010	CHECKED BY	DATE	PATEL	12/03/87				
2 PLACES	±.010	±.010	±.010	APPROVED BY	DATE	LENZ	12/03/87				
1 PLACE	±.010	±.010	±.010	MATERIAL NR. SEE CHART				MOLEX INCORPORATED			
ANGULAR ±1/2°				DOCUMENT NR. SD-7258				1 OF 2			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

[illegible]