

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Dialight](#)  
[5151027F](#)


For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



**1.1mm Round**  
**microLED<sup>®</sup> Optopipe<sup>™</sup>**  
**Optical Light Pipe, Panel Mount**



**515-1027**

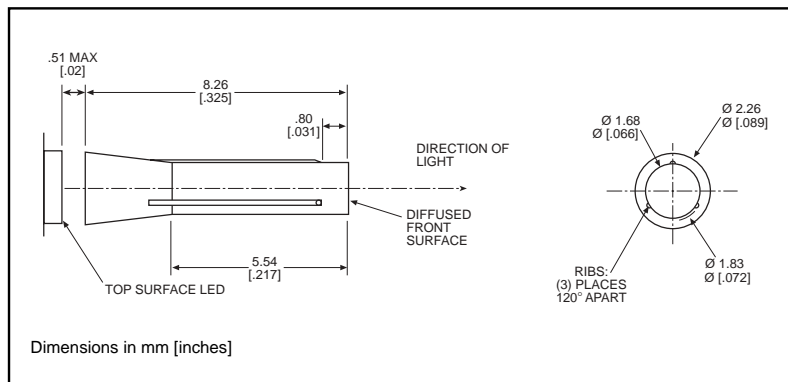

**Alternative**  
**MicroLED SMT LEDs**  
**for use with 515-1027**

<u>PART NO.</u>	<u>PAGE #</u>
597-2xx1-4xx	1-29
597-2x01-2xx	1-25

LED alternatives may not produce optimum light output

**2**

**Features**

- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Arrays reduce insertion costs
- Designed to replace 5mm right angle through-hole device
- Secures to Panel by press-fit

**LED Data**

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

**Operating/Storage Temperature**

-30°C to +100°C

**Dialight Optopipe Light Pipe Description**

This Optopipe's<sup>™</sup> light emitting surface appears bright and uniformly luminous. It is reliably held in the panel by 3 press-fit splines. This Optopipe<sup>™</sup> functions as a through-the-case indicator with a textured finish on its light-emitting surface that increases its viewing angle. The light source can be any super-bright 2mm, 3mm, or 5mm LED, or one of Dialight's 597 Series SMT LEDs. The emitting surface of the light source should be located no more than 0.020" or 0.5mm from the Optopipe<sup>™</sup>. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe<sup>™</sup> solutions for your applications.