


Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[TL53EF100Q](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

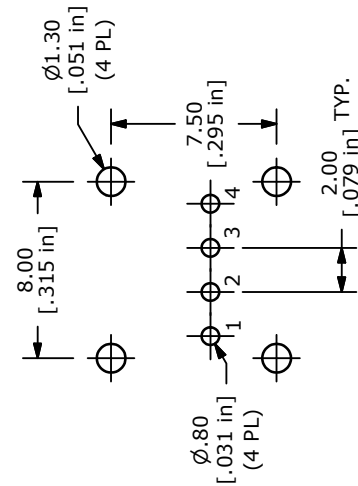




RECOMMENDED PCB LAYOUT

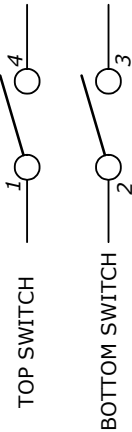

▲ SCHEMATIC

- NOTES:
 1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
 X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT RATING: 50mA @12VDC
 5. TRAVEL: 0.25 +0.2/-0.1mm
 6. CONTACT RESISTANCE: 100 Milli-Ohms Max.
 7. OPERATING FORCE: 100 ± 30gf
 8. CONTACT MATERIAL: SILVER
 9. ▲ DENOTES CRITICAL PARAMETER.
 10. PACKAGE: TRAY/ 200 PIECES PER
 11. 2002/95/EC (ROHS) COMPLIANT

ISOMETRIC

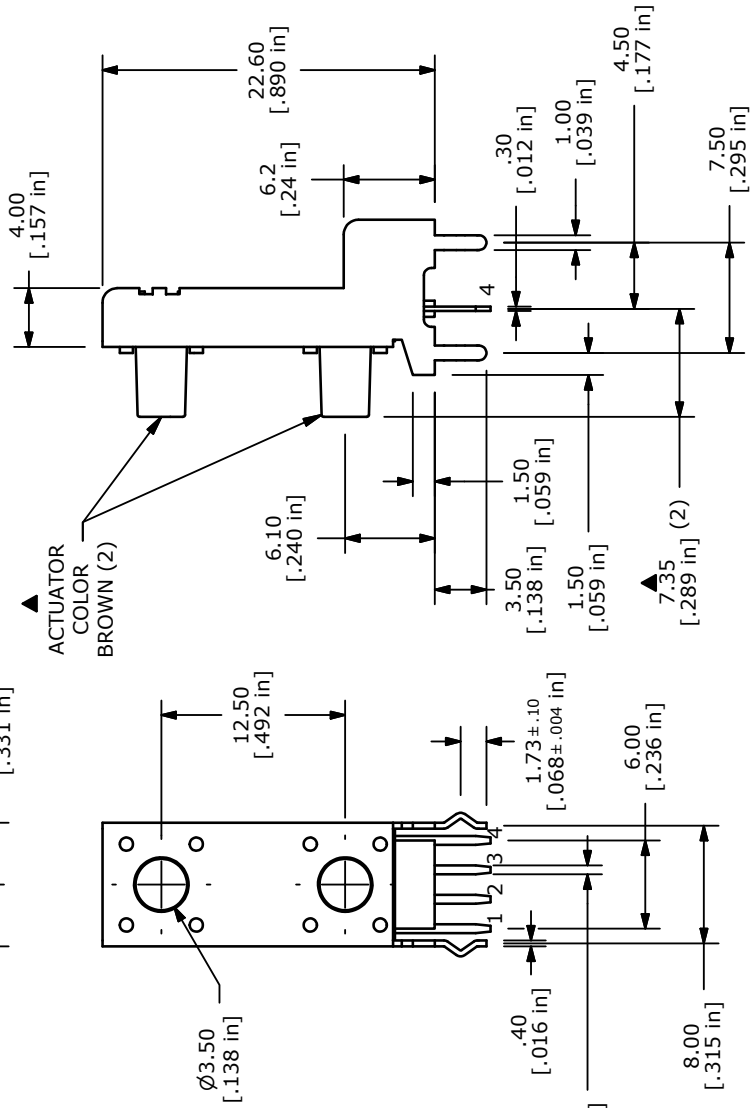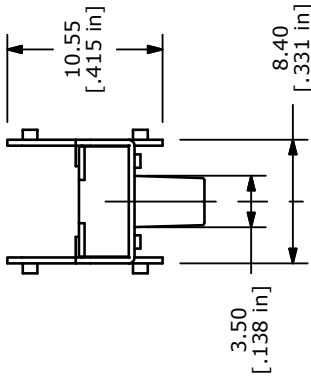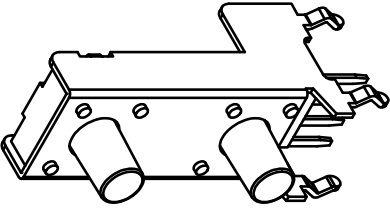

▲ ACTUATOR
 COLOR
 BROWN (2)



TITLE TL53EF100Q

SCALE 2:1

DATE 1/11/2011

DR BGL

DWG P010640

REV B

B	19576	DRAWING UPDATES / CLEAN-UP	1/11/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				