

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1511760000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) | Plug connectors, solder connection, pitch 5.00/5.08 | SL 5.00-5.08/90 | SL 5.08/90B

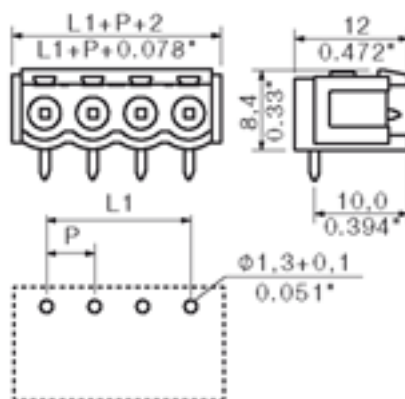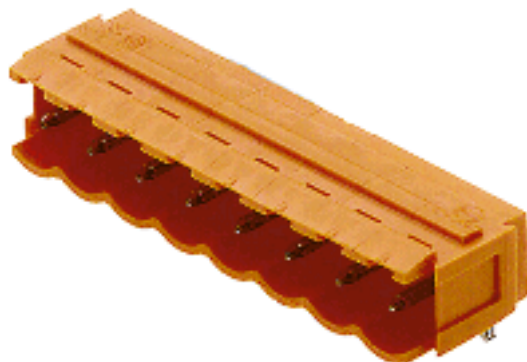

General ordering data

Order No.	1511760000
Part designation	SL 5.08/16/90B3.2SN OR
Version	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 16, 90°, Box
EAN	4008190020552
Qty.	50 pc(s).

System parameters

Fitted to PCB	Soldered connection
Outgoing elbow	90°
Pitch	5.08 mm
Pitch in inch	0.2 inch
No. of poles	16
Solder pin length	3.2 mm
Can be coded	Yes
No. of rows	1
No. of solder pins per pole	1
Dia. of fitting hole	1.3 mm
Fitting hole tolerance	+ 0.1 mm
L1 in mm	76.2 mm
L1 in inch	3 inch
Insulation resistance	1 MΩ

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) | Plug connectors, solder connection, pitch 5.00/5.08 | SL 5.00-5.08/90 | SL 5.08/90B

System parameters

Electric shock protection to DIN VDE 0470	IP20 plugged
Electric shock protection to DIN VDE 0470	Safe from finger touch, plugged

Material data

Insulating material	PBT
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 200
Contact base material	CuSn
Contact surface	tinned
Constant operating temp., min.	-25 °C
Constant operating temp., max.	100
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C
Max. relative humidity during storage	80 %

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	18 A
Rated current, max. No. pins (Tu=20°C)	14.5 A
Rated current, min. No. pins (Tu=40°C)	15 A
Rated current, max. No. pins (Tu=40°C)	12 A
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Rated voltage for overvoltage class/pollution severity III/2	320 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated voltage for overvoltage class/pollution severity II/2	400 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Short-time withstand current resistance	3 x 1s with 120 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

Approvals

Approvals institutes



Downloads

CAD Library (P-CAD Format - Standard) SL.LIB

Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

Similar products

Order No.	Part designation	Version
1510360000	SL 5.08/2/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 2, 90°, Box
1510460000	SL 5.08/3/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 3, 90°, Box
1510560000	SL 5.08/4/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 4, 90°, Box
1510660000	SL 5.08/5/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 5, 90°, Box
1510760000	SL 5.08/6/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 6, 90°, Box
1510860000	SL 5.08/7/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 7, 90°, Box
1510960000	SL 5.08/8/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 8, 90°, Box
1511060000	SL 5.08/9/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 9, 90°, Box
1511160000	SL 5.08/10/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 10, 90°, Box
1511260000	SL 5.08/11/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 11, 90°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) | Plug connectors, solder connection, pitch 5.00/5.08 | SL 5.00-5.08/90 | SL 5.08/90B

1511360000	SL 5.08/12/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 12, 90°, Box
1511460000	SL 5.08/13/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 13, 90°, Box
1511560000	SL 5.08/14/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 14, 90°, Box
1511660000	SL 5.08/15/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 15, 90°, Box
1511860000	SL 5.08/17/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 17, 90°, Box
1511960000	SL 5.08/18/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 18, 90°, Box
1512060000	SL 5.08/19/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 19, 90°, Box
1512160000	SL 5.08/20/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 20, 90°, Box
1512260000	SL 5.08/21/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 21, 90°, Box
1512360000	SL 5.08/22/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 22, 90°, Box
1512460000	SL 5.08/23/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 23, 90°, Box
1512560000	SL 5.08/24/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 24, 90°, Box