


Extended length is with 500g of force

**Materials:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

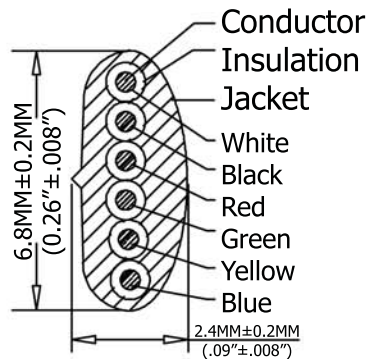

SEC: A-A

P1	P2
1	6
2	5
3	4
4	3
5	2
6	1

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	53.5 Inches
4,267.2MM-4,907.28MM	1,358.9MM



ITEM NO

**AT-C-26-6/6/W-14-R**

TITLE NON-UL 26AWG (0.16/7)\*6C, O.D.: 2.4\*6.8MM

Standard Plug, 50µ" of contact plating, WHITE

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved