

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[73053](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Model 73053

TNC Right-Angle Jack to Plug Adapter

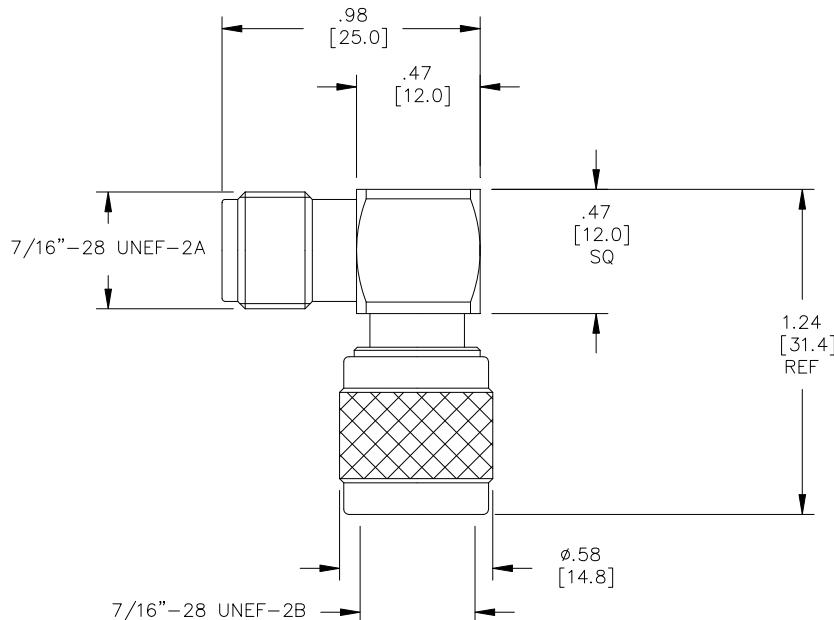

Model 73053
TNC Right-Angle Jack to Plug Adapter

Features

- DC – 4GHz bandwidth.
- Connectors are precision machined.

Materials

Center Conductor:

Male: Brass, Gold Plated

Female: Phosphor Bronze, Gold Plated

Connector Body: Brass, Nickel Plated

Insulators: PTFE

Specifications

Impedance: 50Ω

Frequency Range: DC – 4GHz

Contact Resistance:

Center Conductor: $\leq 1.5 \text{ m}\Omega$

Outer Conductor: $\leq 0.2 \text{ m}\Omega$

Insulation Resistance: $\geq 5000 \text{ M}\Omega$

Dielectric Withstand Voltage: 1500V

For CE compliance, do not hold in hand when voltages exceed 33 Vrms / 70 Vdc.

Number of Insertions: 500 cycles minimum

Ordering Information

Model: **73053**

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.