

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[1200710036](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

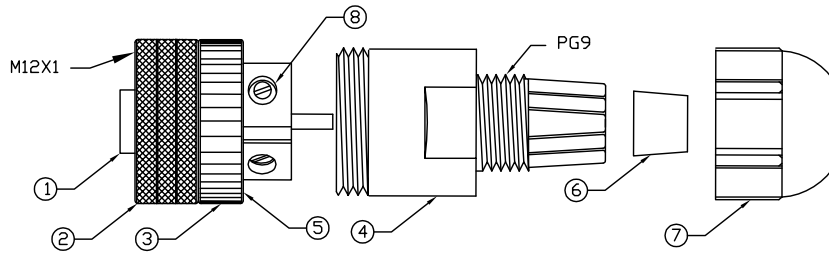

NOTES:

MATERIALS:

MOLDED BODY:	BLACK POLYAMIDE
COUPLING NUT:	NI PLATED BRASS
COMPRESSION NUT:	BLACK POLYAMIDE
GROMMETT:	NITRILE RUBBER
CONTACTS:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	BLACK NYLON
INSERT HOUSING:	BLACK POLYAMIDE
SET SCREWS:	NI PLATED BRASS

ELECTRICAL:

CURRENT RATING:	4AMP MAX
VOLTAGE RATING:	250V

MECHANICAL:


TEMPERATURE RANGE:	-20° TO 80°C
INGRESS PROTECTION:	IP 67

AGENCY CERTIFICATIONS:

AGENCY:	cCSAus FILE LR6837
---------	--------------------

TABLE 2 - COMPONENT INFORMATION

ITEM	QTY	DESCRIPTION
1	1	INSULATOR
2	1	COUPLNG NUT
3	1	INSERT BODY
4	1	CONNECTOR BODY
5	1	O-RING
6	1	GROMMET
7	1	COMPRESSION NUT
8	4	SCREW, M3 x 5

UPDATE PER JM EC NO: WNA2008-0313 DRWN: LHARTMAN 2008/10/27 CHKO: YOU 2008/11/07 APPR: JFMURPHY 2008/11/10	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE ----		SCALE 1:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY DATE LHARTMAN 2008/10/27 CHECKED BY DATE VOU 2008/10/27 APPROVED BY DATE JFMURPHY 2008/10/27		TITLE MICRO-CHANGE FIELD ATTC 4 POLE FEMALE ST FF PG9 FITTING SCREW		
			4 PLACES	±---	±---					
			3 PLACES	±---	±.005					
			2 PLACES	±---	±.010					
			1 PLACE	±---	±.020	MATERIAL NO. 1200710036		DOCUMENT NO. SD-130044-003		
			ANGULAR ±1°							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SHEET NO. 1 OF 1							
B	REVIEW		SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

6

5

4

3

2

1